



PROFESSIONAL CYCLING COMPONENTS

FRAME GEOMETRY 2022

Road

P3 ADROITE

P4 ADROITE (disc)

P5 AEOLUS (road)

P6 AIRY EV DISC

P7 AIRY PRO

P8 AIRY PRO DISC

P9 AIRY SL

P10 AIRY-D

P11 ALICANTE

P12 ALLER

P13 ALLER-D

P14 ANLACE

P15 ARGOS EV DISC

P16 ARGOS-D

P17 AVANCE (direct mount)

P18 AVANCE-D (flat mount
disc)

P19 AXION SL

P20 ENDURANCE DISC

P21 FOX II

P22 GRAVEL X

P23 GRAVEL 2

P24 GRAVEL

P25 GRAVEL ALU

P26 ASCETIC

MTB

P27 PICCOLO 650B

P28 PICCOLO 650B SL

P29 PICCOLO 29ER

P30 PICCOLO 29ER SL

P31 PYRENEES 650B

P32 PYRENEES 650B AM PRO

150

P33 PYRENEES 29ER

P34 PYRENEES 29ER AM PRO

150

P35 PYRENEES PLUS

P36 PHAETON 650B

P37 PHAETON 650B PLUS

P38 PHAETON 29ER SL

P39 PHAETON 29ER BOOST SL

P40 PYTHON ONE 29ER BOOST

P41 PYTHON X 29ER BOOST

P42 PAX

P43 PHANTOM

P44 ARTIC

P45 TALLYHO

TRACK

P46 STINGER

P47 STINGER EV

TIME TRIAL

P48 SPRINT DISC

P49 SPRINT-2

P50 SPRINT EV

P51 ROSETTA

CYCLOCROSS

P52 CCX PRO

P53 CCX PRO D

P54 CCX EV

E-BIKE

P55 PINNACLE 29ER

P56 E PYRENEES PLUS 160

P57 E PYRENEES PLUS


P58 AEOLUS (e-bike)

TRIATHLON

P59 TRIDENT DISC


P60 TRIDENT

LEGENDS

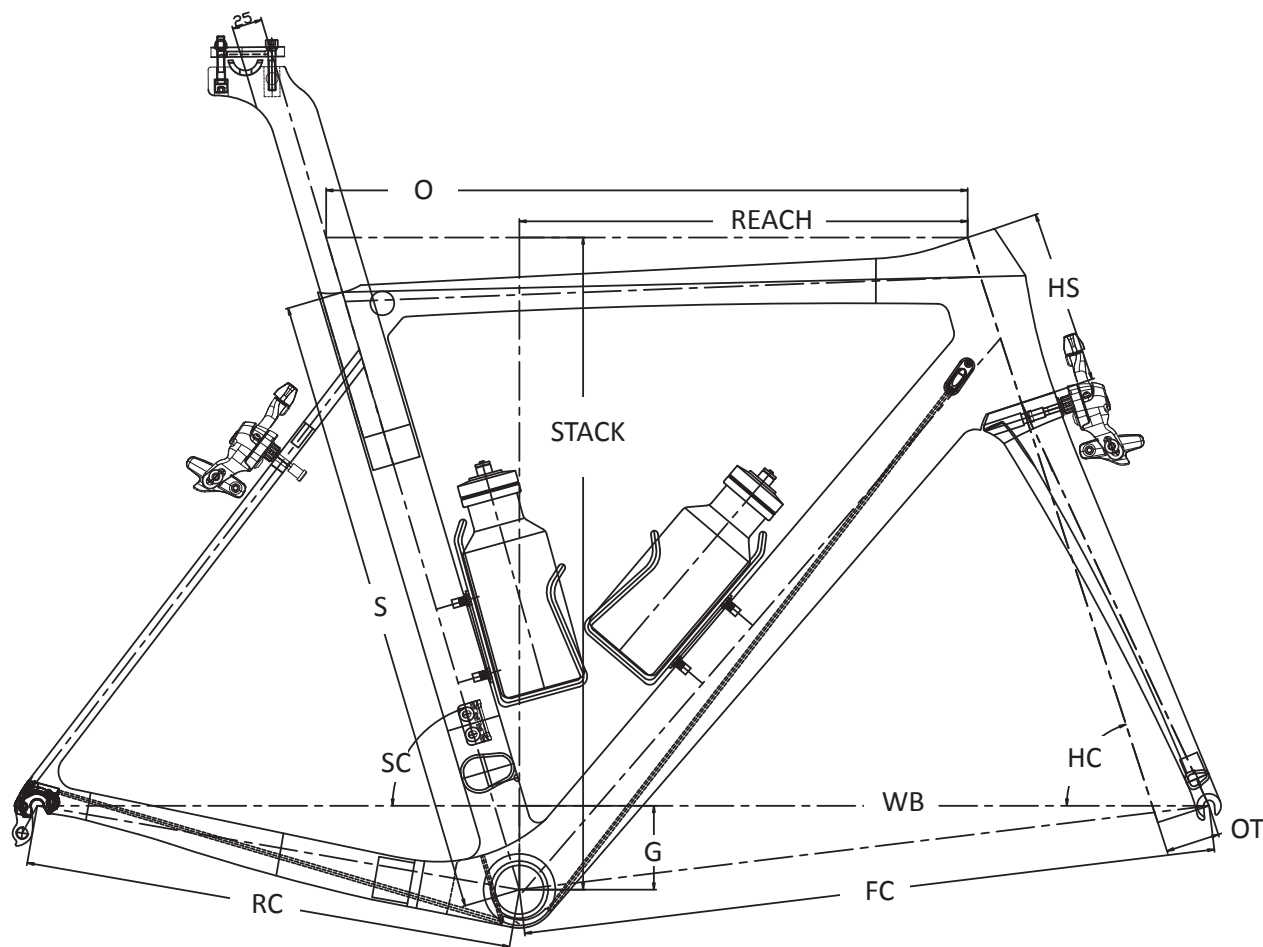


ADROITE (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	OT	WB	FC	RC	G	Reach	Stack
480	480	74.8°	515	125	71.3°	45	976.4	578.4	408	69	373.6	521.5
500	500	74.3°	525	135	72°	45	975.7	577.7	408	69	375.4	533.5
520	520	73.5°	535	145	72°	45	977.3	579.4	408	70	373.9	544
540	540	73°	550	160	72.3°	45	984.5	586.6	408	70	379	559.3
560	560	72.5°	560	170	72.3°	45	989.2	591.2	408	70	380.6	568.9
580	580	72.5°	570	190	73°	45	992.1	594.1	408	70	383.8	590.5

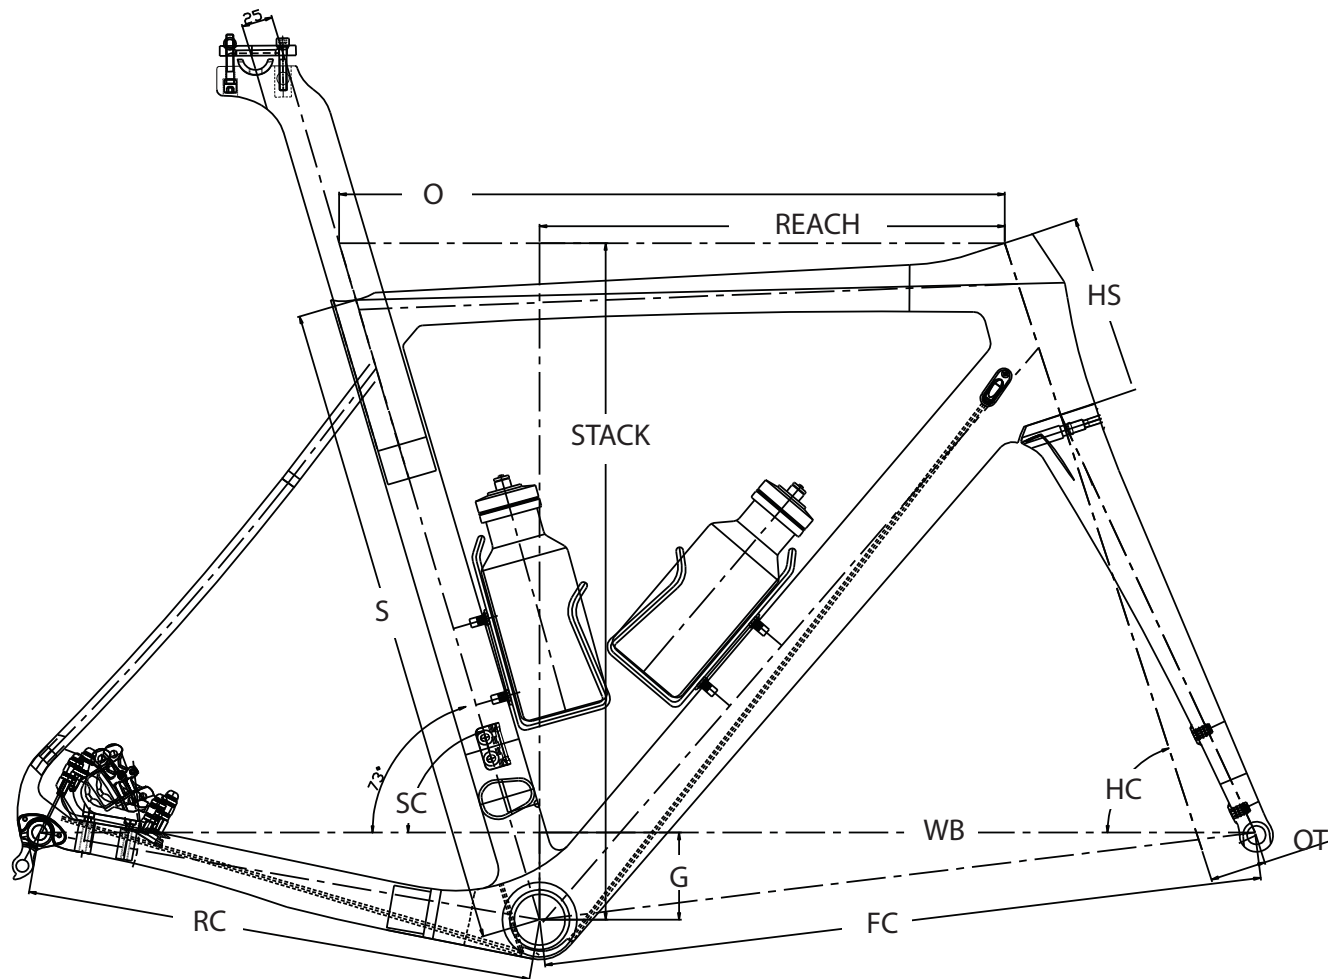


ADROITE-Disc (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	OT	WB	FC	RC	G	Reach	Stack
480	480	74.8°	515	125	71.3°	45	976.4	578.4	408	69	373.6	521.5
500	500	74.3°	525	135	72°	45	975.7	577.7	408	69	375.4	533.5
520	520	73.5°	535	145	72°	45	977.3	579.4	408	70	373.9	544
540	540	73°	550	160	72.3°	45	984.5	586.6	408	70	379	559.3
560	560	72.5°	560	170	72.3°	45	989.2	591.2	408	70	380.6	568.9
580	580	72.5°	570	190	73°	45	992.1	594.1	408	70	383.8	590.5

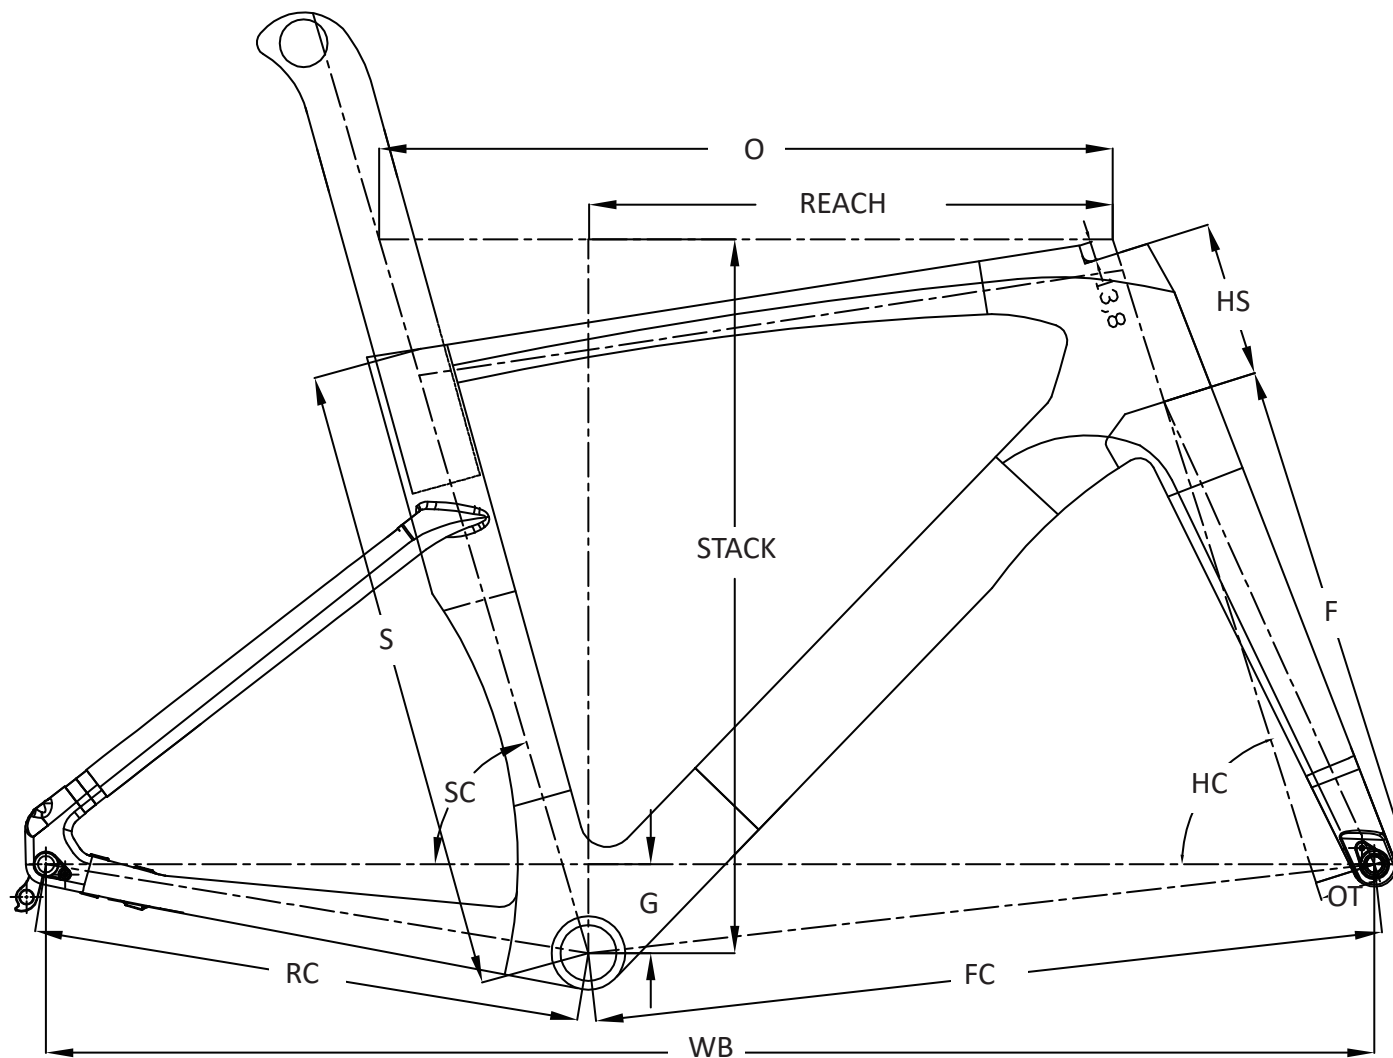


AEOLUS (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
430	430	74°	520	105	71°	370	45	974	577	406	65	376	500
460	460	74°	535	115	72.5°	370	45	977	580	406	65	388	514
500	500	74°	553	145	73°	370	45	991	594	406	65	397	544
540	540	74°	569	165	73°	370	45	1007	610	406	65	407	564
570	570	74°	585	180	73°	370	45	1024	627	406	65	420	578

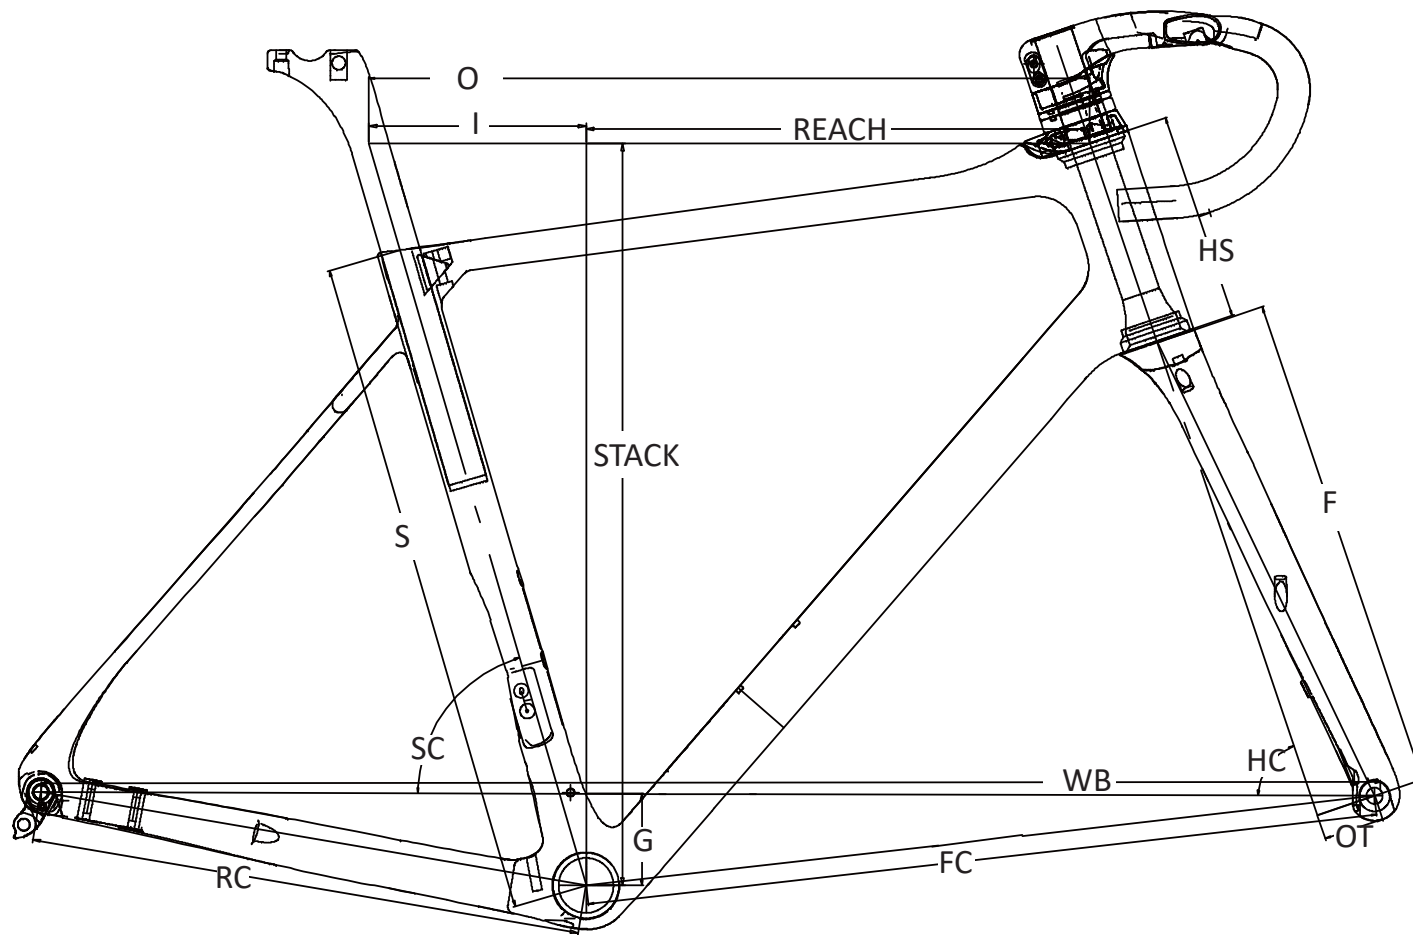


AIRY EV DISC (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	I	REACH	STACK
490	450	75°	505	135	70°	368	50	987.3	587.5	410	70	141.1	363.9	526.5
510	470	74.5°	520	145	70.5°	368	50	993.6	593.7	410	70	149.2	370.8	537.8
530	490	74°	535	155	71°	368	50	999.6	599.5	410	70	157.5	377.5	549.2
550	510	73.5°	550	165	71.5°	368	50	1004.9	604.9	410	70	166	384	560.5
570	530	73°	565	175	72°	368	50	1009.8	609.7	410	70	174.9	390.1	571.9

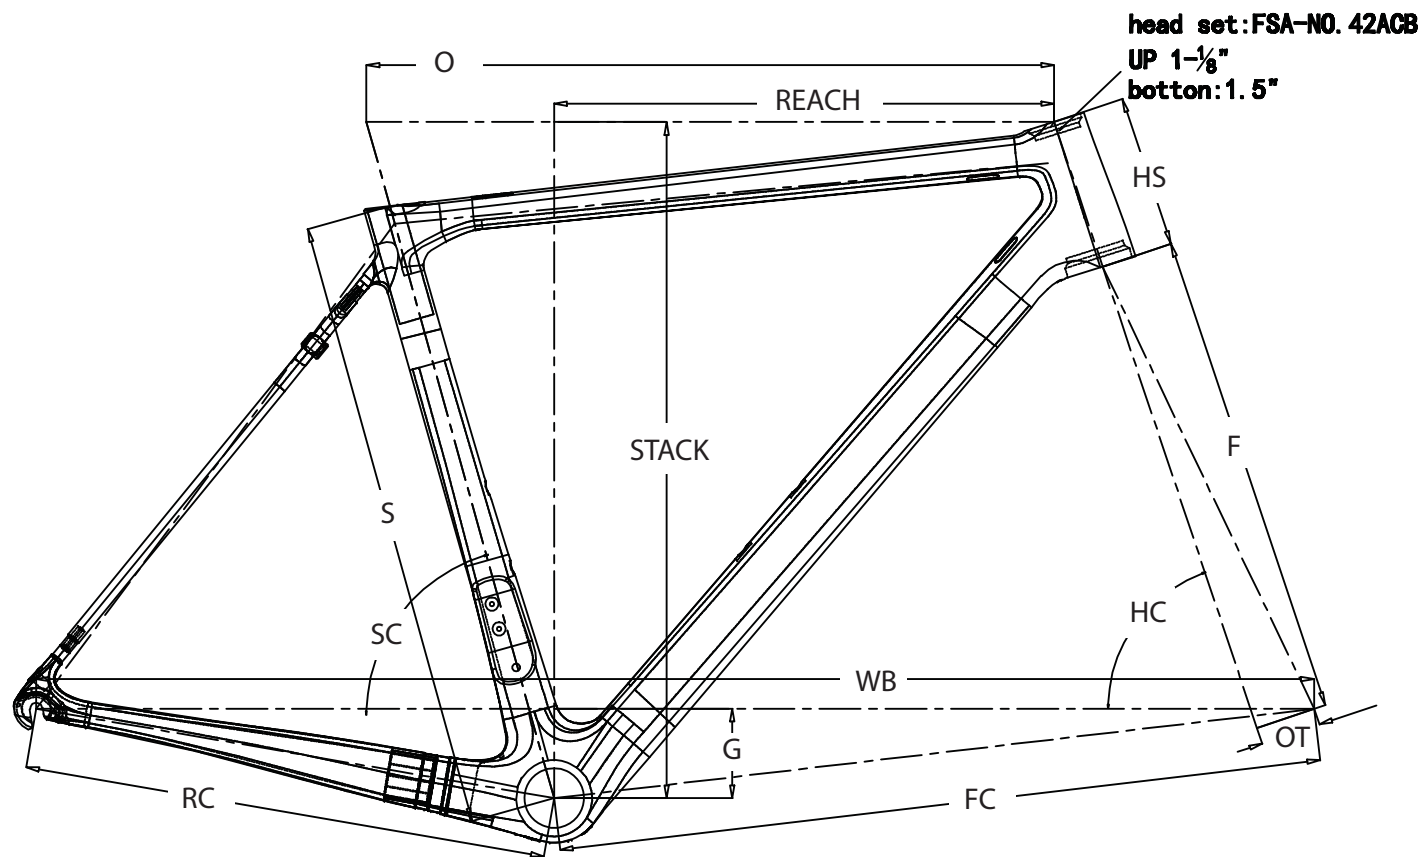


AIRY PRO (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
450	415	75°	505	100	71°	368	45	964.4	570.4	405	72	371	501
480	435	74.5°	515	110	71.5°	368	45	967.3	573.3	405	72	373	512
500	455	74.5°	525	115	72°	368	45	972.5	578	405	72	381	519
520	475	74°	535	120	72.5°	368	45	974.6	579.5	405	69	385	522
540	495	73.5°	545	140	73°	368	45	975.2	580.2	405	69	384	543
560	515	73.5°	559.6	155	73°	368	45	990	595	405	69	395	558
580	535	73°	575	175	73.5°	368	45	995.1	600	405	69	398	579

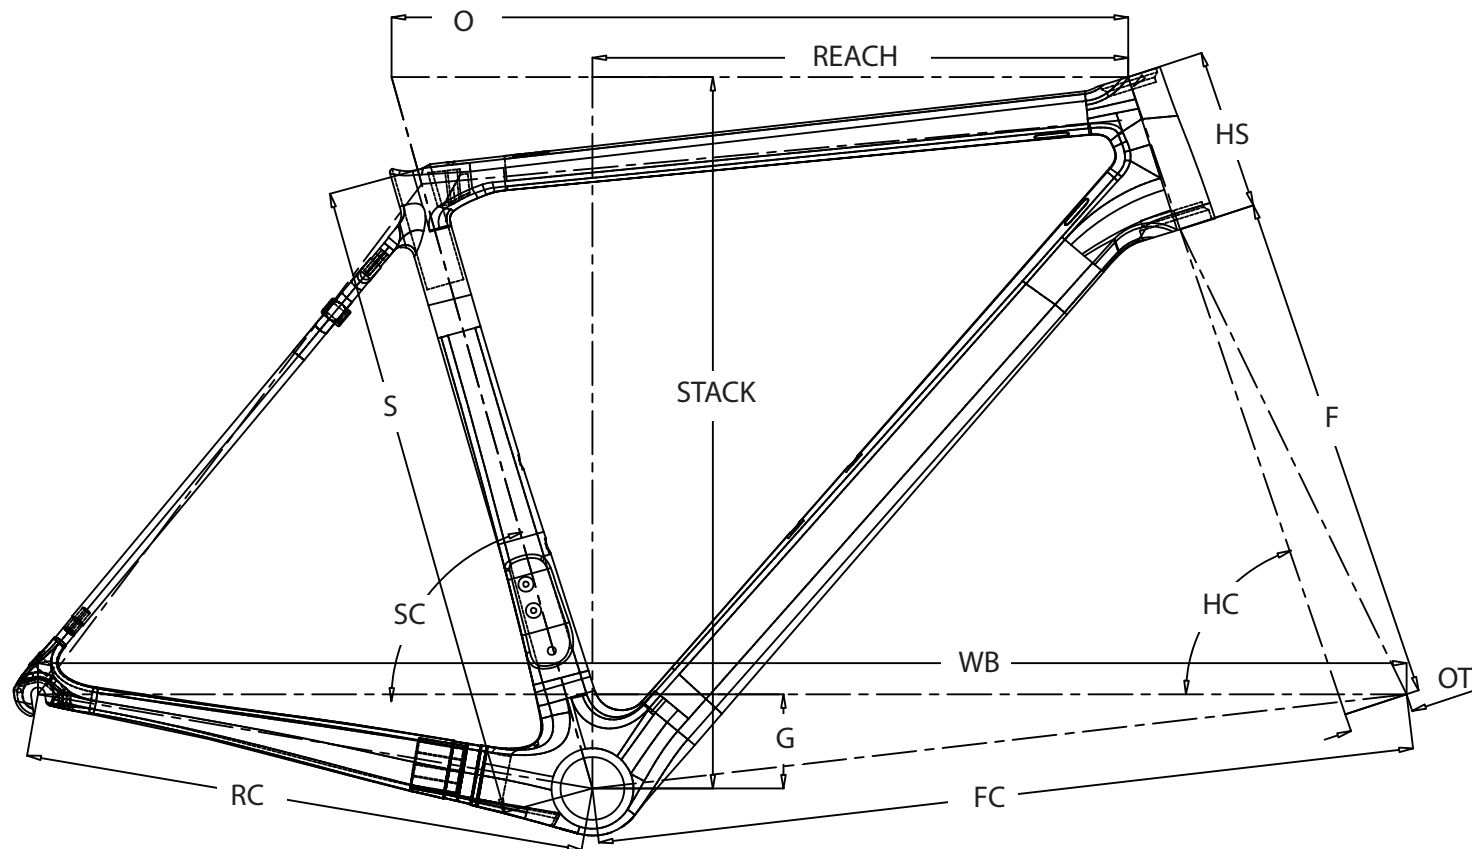


AIRY PRO DISC (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
450	450	75°	505	100	71°	370	45	964.2	570.2	410	72	371	501
480	480	74.5°	515	110	71.5°	370	45	966.3	572.3	410	72	373	513
500	500	74.5°	525	115	72°	370	45	972.2	578.1	410	72	381	519
520	520	74°	535	120	72.5°	370	45	974.6	579.5	410	69	384	522
540	540	73.5°	545	140	73°	370	45	975.2	580.2	410	69	385	543
560	560	73.5°	559.6	155	73°	370	45	990	594.9	410	69	395	558
580	580	73°	575	175	73.5°	370	45	995.1	600	410	69	398	579

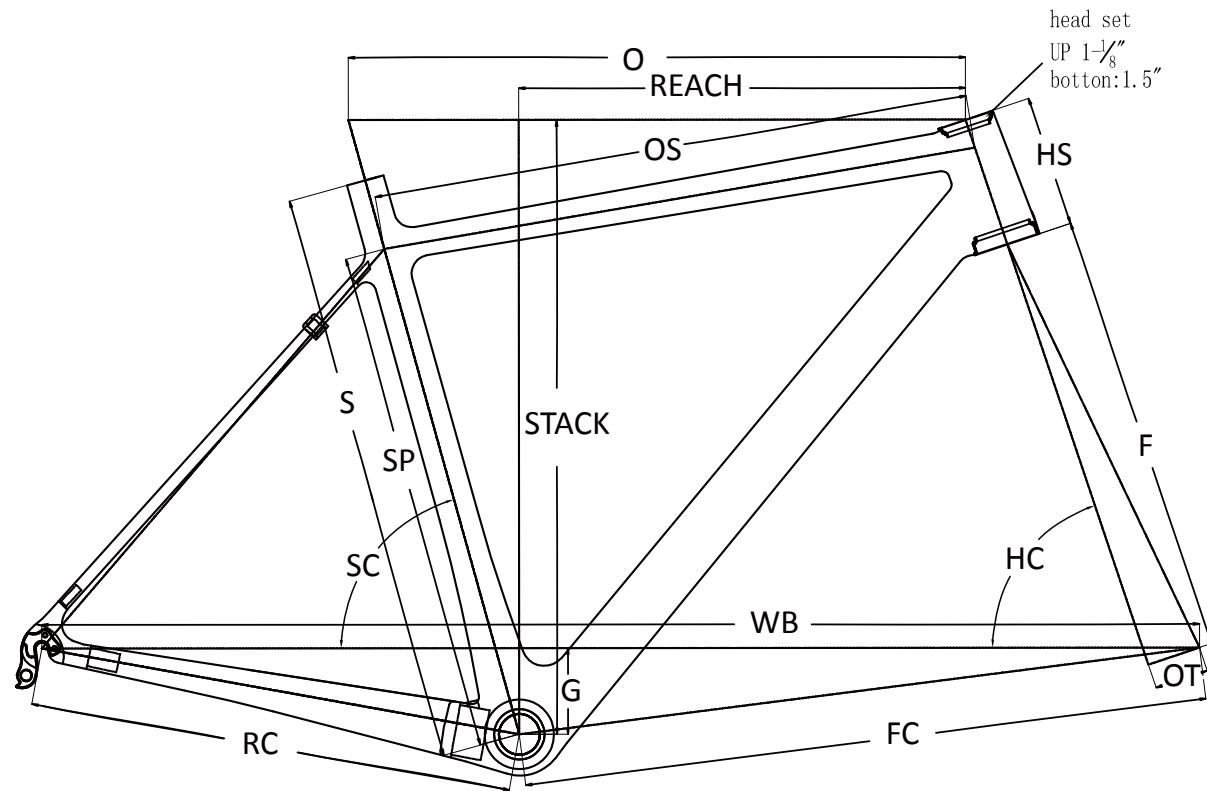


AIRY SL (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
450	450	400	75°	505	491	100	71°	370	45	964.2	570.2	408	72	371	501
480	480	420.6	74.5°	515	500.1	110	71.5°	370	45	996.3	572.3	408	72	373	513
500	500	440.6	74.5°	525	511.5	115	72°	370	45	972.2	578.1	408	72	381	519.5
520	520	460.6	74°	535	522.9	120	72.5°	370	45	974.6	579.5	408	69	384	522.5
540	540	480.6	73.5°	545	531.7	140	73°	370	45	975.2	580.2	408	69	385	543
560	560	500.6	73.5°	559.6	547.2	155	73°	370	45	990	594.9	408	69	394.5	557.5
580	580	520.6	73°	575	560.9	175	73.5°	370	45	995.1	600	410	69	398	579
600	600	540.6	72.5°	590	574.7	195	73.5°	370	45	1004.2	609	410	69	401.5	598

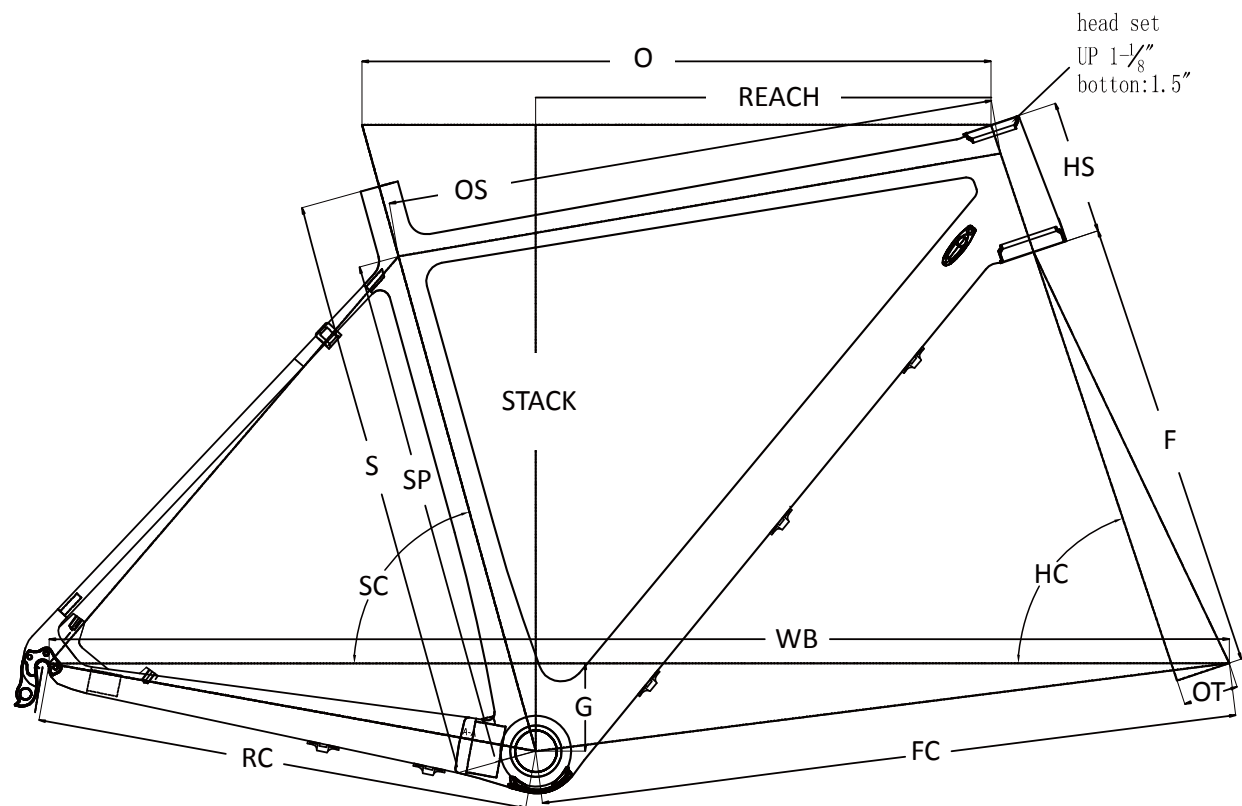


AIRY D (Length: mm/ Angle: °)
 OLD 135mm/ ROTOR 140mm

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
450	450	400	75°	505	491	95.8	71°	368	45	974.4	570.2	410	72	370.9	500.7
480	480	420.6	74.5°	515	500.1	105.8	71°	368	45	976.4	572.3	410	72	372.8	512.9
500	500	440.6	74.5°	525	511.5	110.8	72°	368	45	981.4	578.1	410	72	381	519.4
520	520	460.6	74°	535	522.9	115.8	72.5°	368	45	974.6	579.5	410	69	384.1	522.5
540	540	480.6	73.5°	545	531.7	135.8	73°	368	45	985.4	580.2	410	69	385.2	543.2
560	560	500.6	73.5°	559.6	547.2	150.8	73°	368	45	1000.1	594.9	410	69	394.5	557.6
580	580	520.6	73°	575	560.9	170.8	73.5°	368	45	1005.2	600	410	69	398.1	578.8
600	600	540.6	72.5°	590	574.7	190.8	73.5°	368	45	1014.3	609	410	69	401.5	598

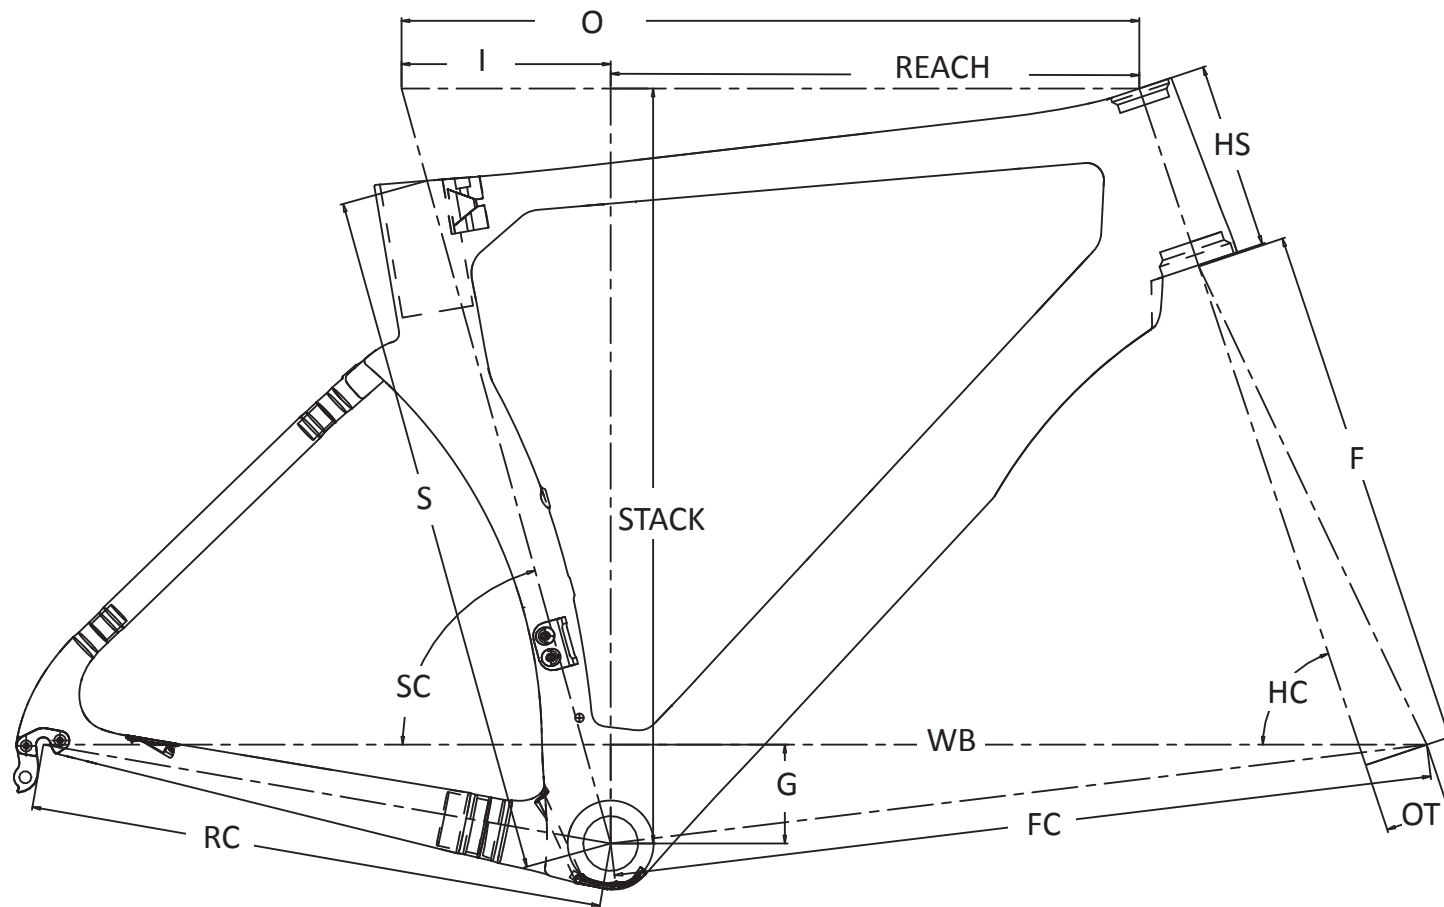


ALICANTE (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	I	REACH	STACK
460	460	75°	495	115	71.5°	367	45	949.7	558	402	69	137.2	357.8	512.8
490	480	74.5°	515	130	71.5°	367	45	965.7	573.9	402	69	146	369	527
520	500	74.5°	525	135	72°	367	45	971.5	579.6	402	69	147.8	377.2	533.5
540	520	74°	535	140	72.5°	367	45	972.1	580.1	402	69	154.7	380.3	540
560	540	73.5°	545	160	73°	367	45	972.5	580.6	402	69	165.9	379.1	560.8
580	560	73.5°	560	180	73°	367	45	987.7	595.7	402	69	171.6	388.4	579.9

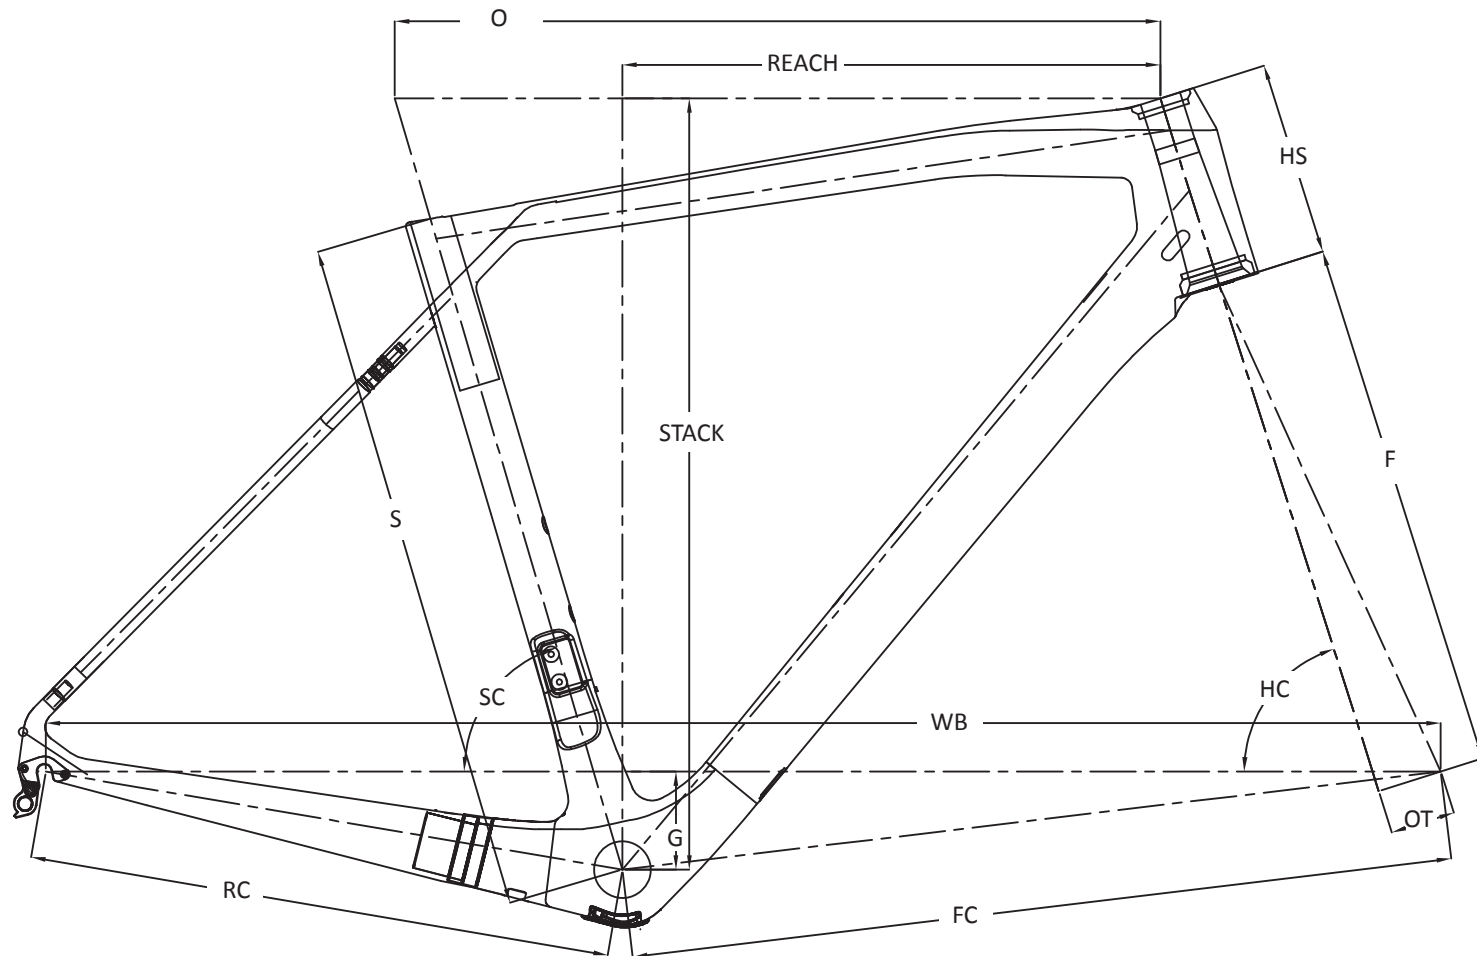


ALLER (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
440	440	74.5°	520	115	71.5°	368	45	978	577.7	410	68	377.8	511.8
470	470	73.6°	540	135	72.5°	368	45	980.9	580.6	410	68	382.4	534.2
510	510	73°	555	155	73°	368	45	985.5	584.9	410	68	385	555
540	540	73°	570	170	73°	368	45	1000.2	599.7	410	68	395.6	569.3
570	570	72.5°	590	190	73.5°	368	45	1009.4	609	410	68	403.5	590.2

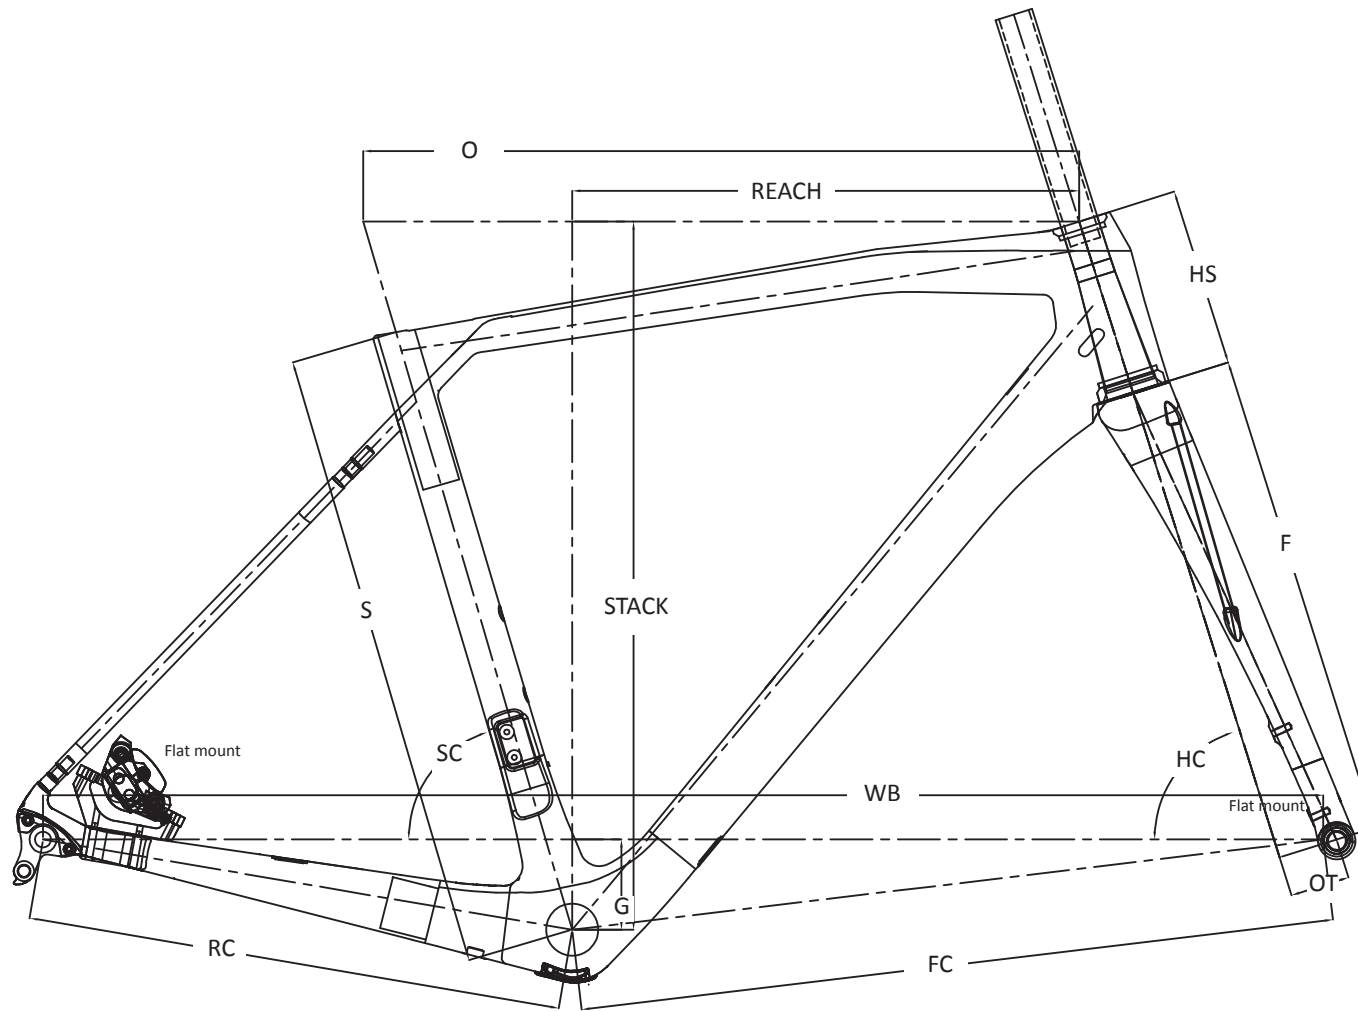


ALLER-D (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
440	440	74.5°	520	115	71.5°	368	45	978	577.7	410	68	377.8	511.8
470	470	73.6°	540	135	72.5°	368	45	980.9	580.6	410	68	382.4	534.2
510	510	73°	555	155	73°	368	45	985.5	584.9	410	68	385	555
540	540	73°	570	170	73°	368	45	1000.2	599.7	410	68	395.6	569.3
570	570	72.5°	585	190	73.5°	368	45	1009.4	609	410	68	403.5	590.2

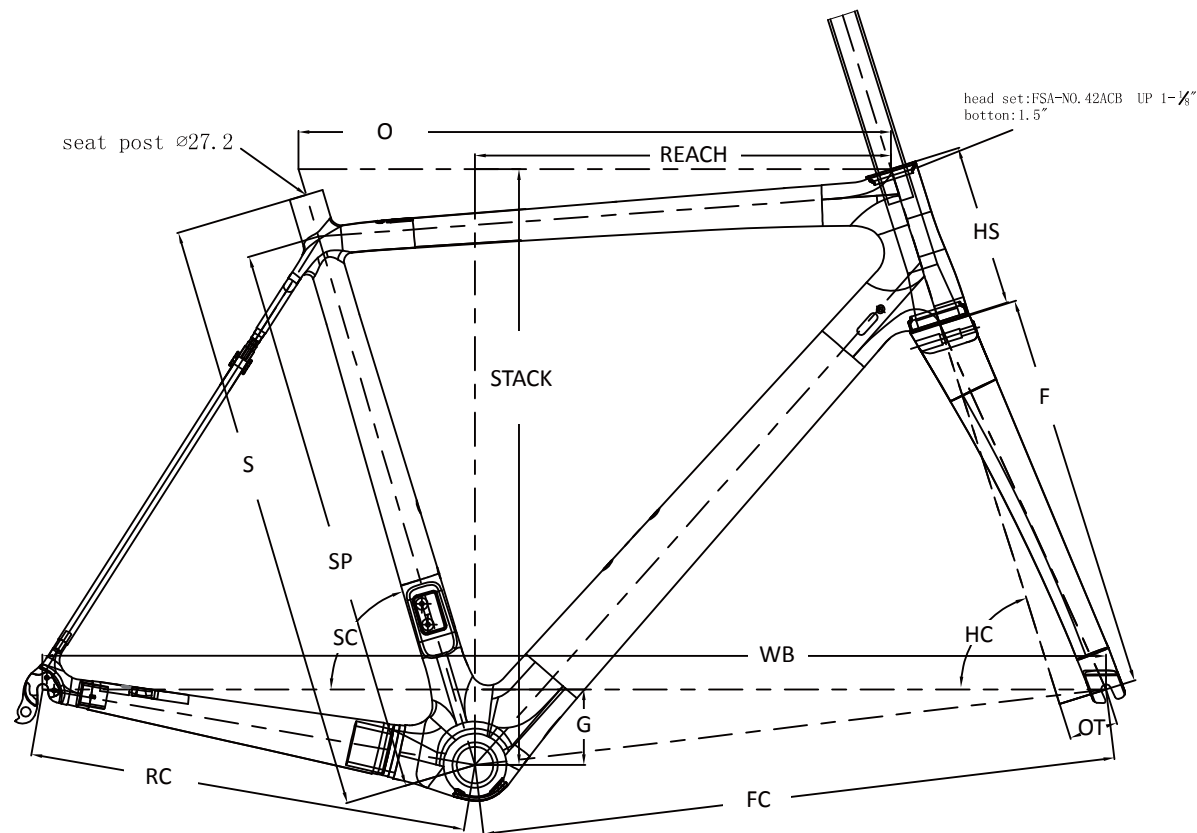


ANLACE (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
450	450	400	75°	500	105	70.5°	368	43	963.9	568.3	406	70	365	502
470	470	420	75°	500	110	70.5°	368	43	966.5	570	406	70	365.5	506.2
490	490	450	75°	505	115	71°	368	43	965.4	570	406	70	367.6	512.7
510	510	470	74.5°	517	125	71.5°	368	43	967.1	571.5	406	70	370	524.6
530	530	490	74°	530	135	72°	368	43	967.5	572	406	70	375.4	537
550	550	510	73.5°	548	150	72.5°	368	43	981	585.5	406	70	384.8	551
580	580	540	73.5°	568	170	73°	368	43	996.5	601	406	70	398.3	572

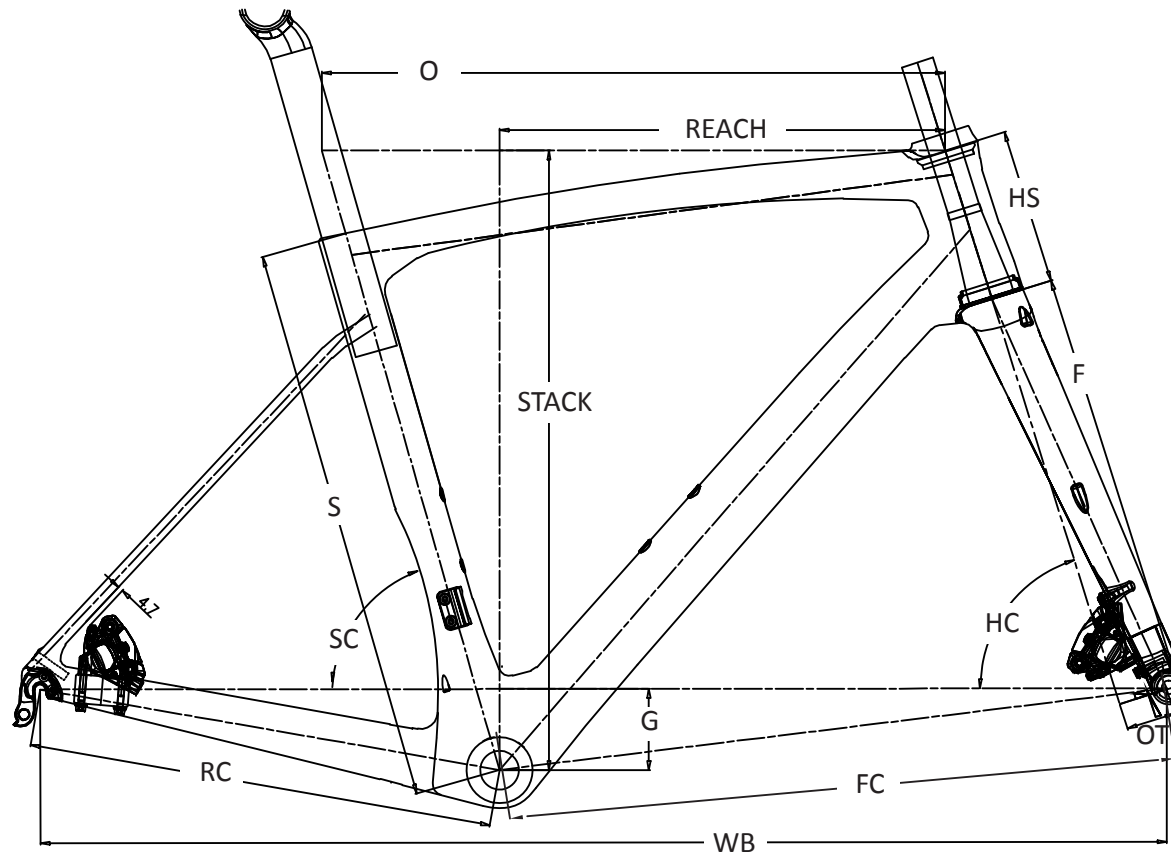


ARGOS EV DISC (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
49	455	75.5°	508	104	71.75°	370	45	969.5	572.1	407	74	376.3	510.1
52	480	74°	531	115	72.5°	370	45	970	574.1	407	74	381	523
54	486	74°	543	135	72.5°	370	45	981	587.5	407	70	388	539
56	518	73.5°	562	153	73.5°	370	45	989.1	592.6	407	70	396.5	558.7
58	537	73.5°	577	180	73.5°	370	45	1004.1	607.2	407	70	403.8	584.6

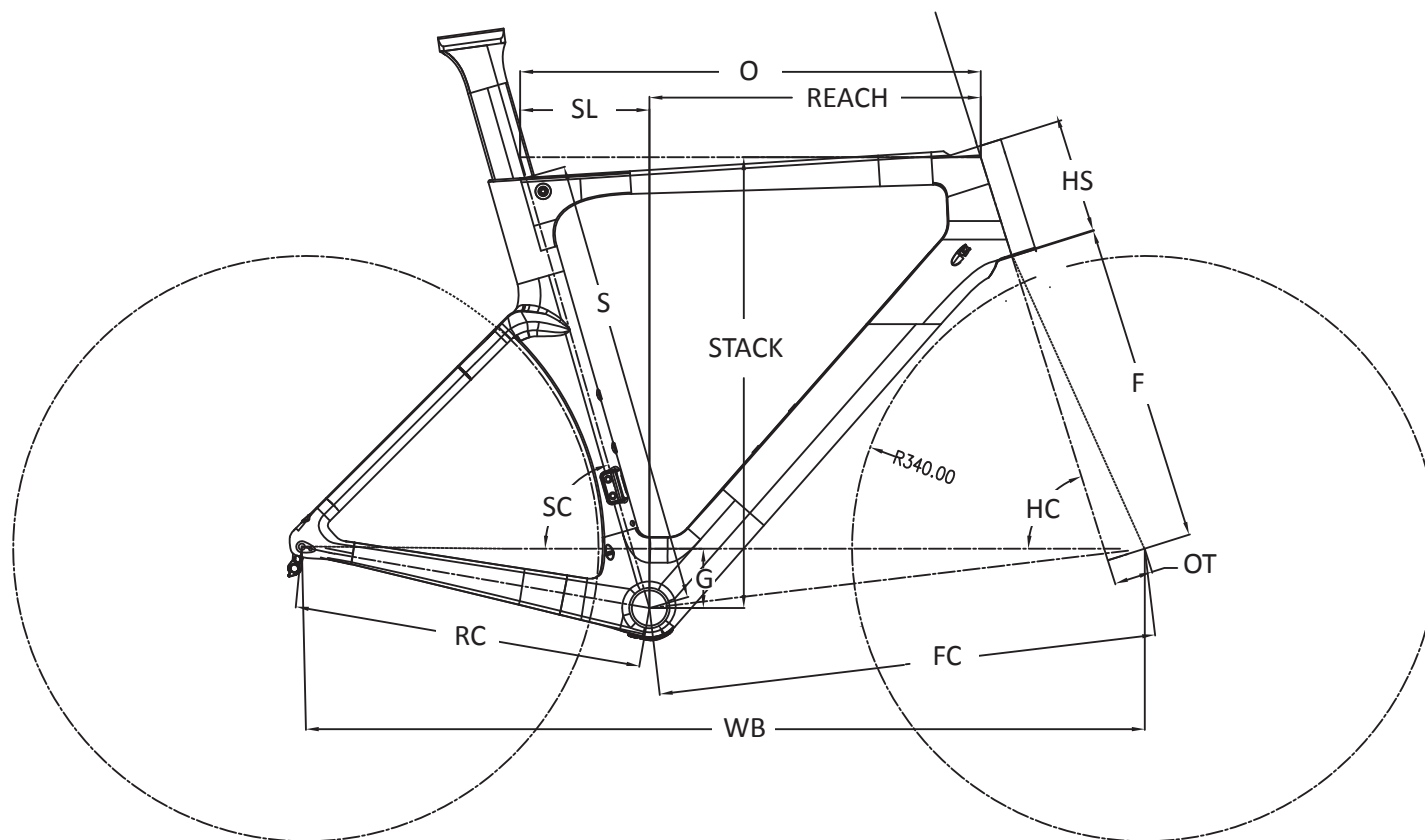


ARGOS-D (Length: mm/ Angle: °)

SIZE	S	SC	SL	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
49	480	74.5°	141	515	120	71.5°	375	45	972.6	572.7	410	69	373.4	510
52	500	74.5°	143.2	525	125	72°	375	45	978.6	578.6	410	69	381.8	516.5
54	520	74°	150	535	130	72.5°	375	45	979.5	579.5	410	69	384.8	523.7
56	540	73.5°	161	545	150	73°	375	45	980.2	580.3	410	69	385	543.2
59	560	73.5°	165	560	170	73°	375	45	995	595	410	69	395	558.3

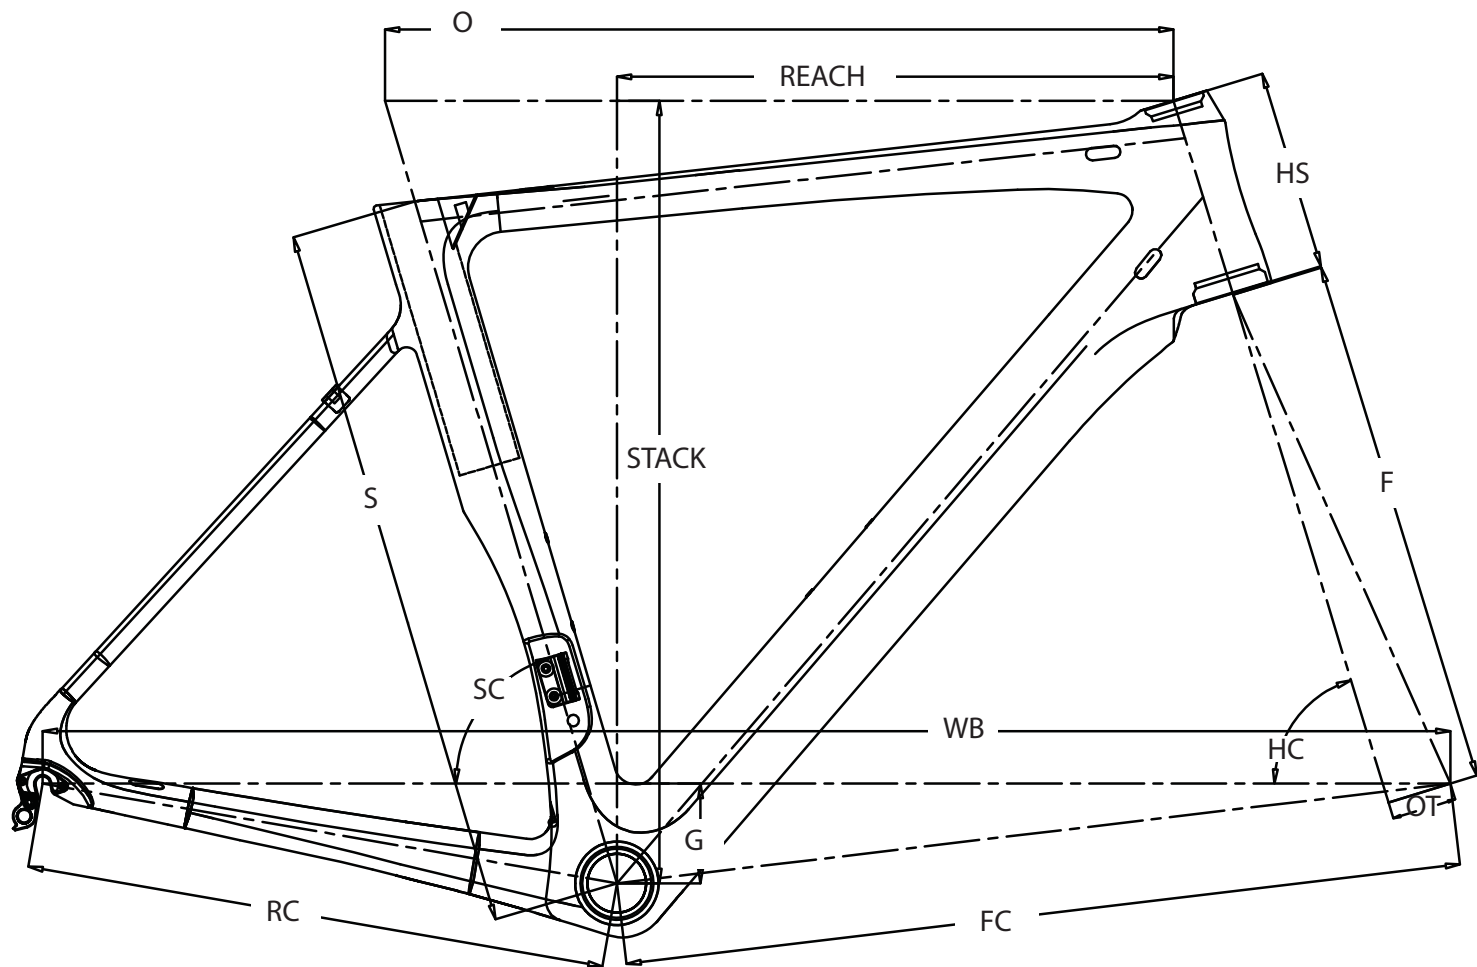


AVANCE- Direct mount (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
430	430	75°	515	100	71.5°	370	45	971.7	576.8	405	69	380.7	501.1
470	470	74°	536	120	72.5°	370	45	975.3	580.4	405	69	385.9	523.4
495	495	73.5°	548	140	73°	370	45	978	583.1	405	69	386.9	543.8
510	510	73.25°	565	160	73.5°	370	45	987.7	592.7	405	69	394.9	565
540	540	73°	587	180	73.5°	370	45	1006.8	611.7	405	69	408.3	584.2

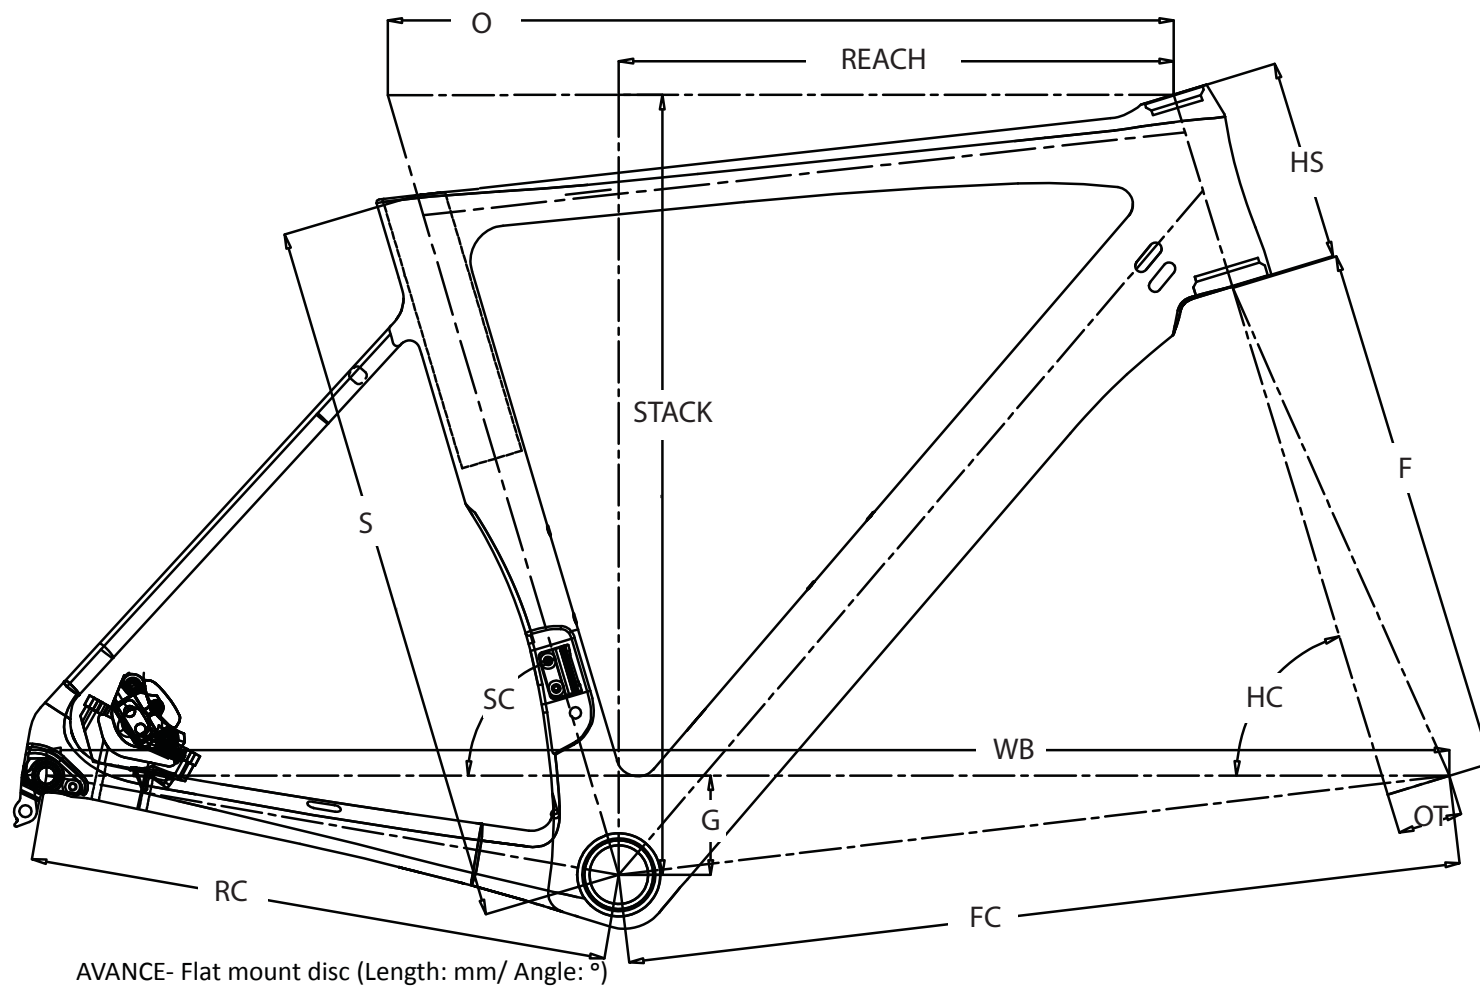


SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
430	430	75°	515	100	71.5°	370	45	971.7	576.8	405	69	380.7	501.1
470	470	74°	536	120	72.5°	370	45	975.3	580.4	405	69	385.9	523.4
495	495	73.5°	548	140	73°	370	45	978	583.1	405	69	386.9	543.8
510	510	73.25°	565	160	73.5°	370	45	987.7	592.7	405	69	394.9	565
540	540	73°	587	180	73.5°	370	45	1006.8	611.7	405	69	408.3	584.2

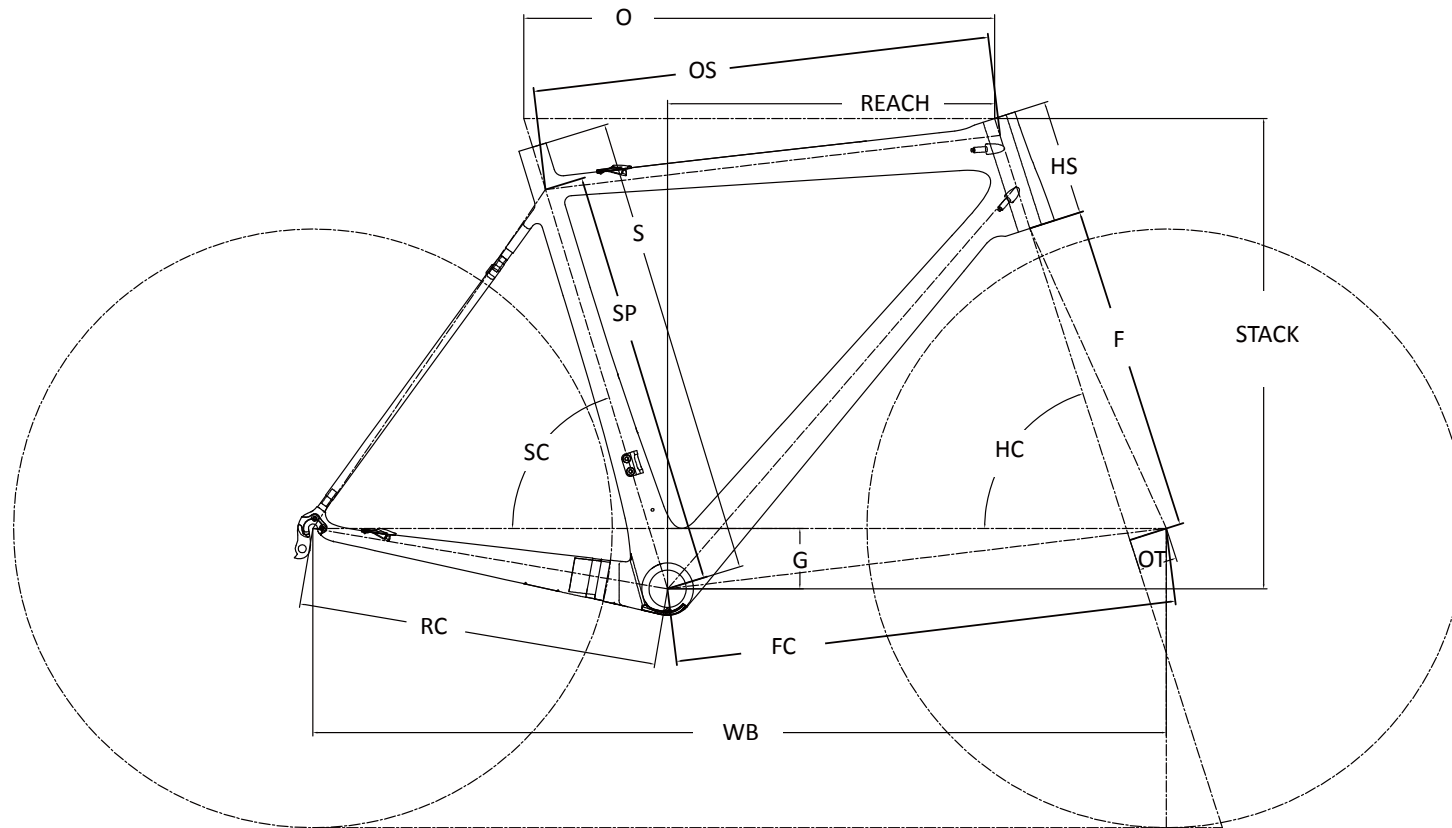

AXION SL (Length: mm/ Angle: °)


SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
470	470	420	75°	500	487.1	100	71.5°	371	43	955.1	560	405	68	366.4	498.6
490	490	440	74°	510	494.8	120	72°	371	43	952.3	557.1	405	68	360.4	521.7
510	510	460	73.5°	530.4	514.3	132.8	72.1°	371	43	967.2	572	405	68	372.2	534.2
540	540	490	73°	548	532.7	145	73.1°	371	43	970.5	575.3	405	68	380.1	549.2
565	565	515	72.5°	569.1	552.4	171.1	73.1°	371	43	986.1	590.7	405	68	388.1	574.2
590	590	540	72°	590.7	572.6	197.3	73.1°	371	43	1004.6	606.2	405	68	396	599.3

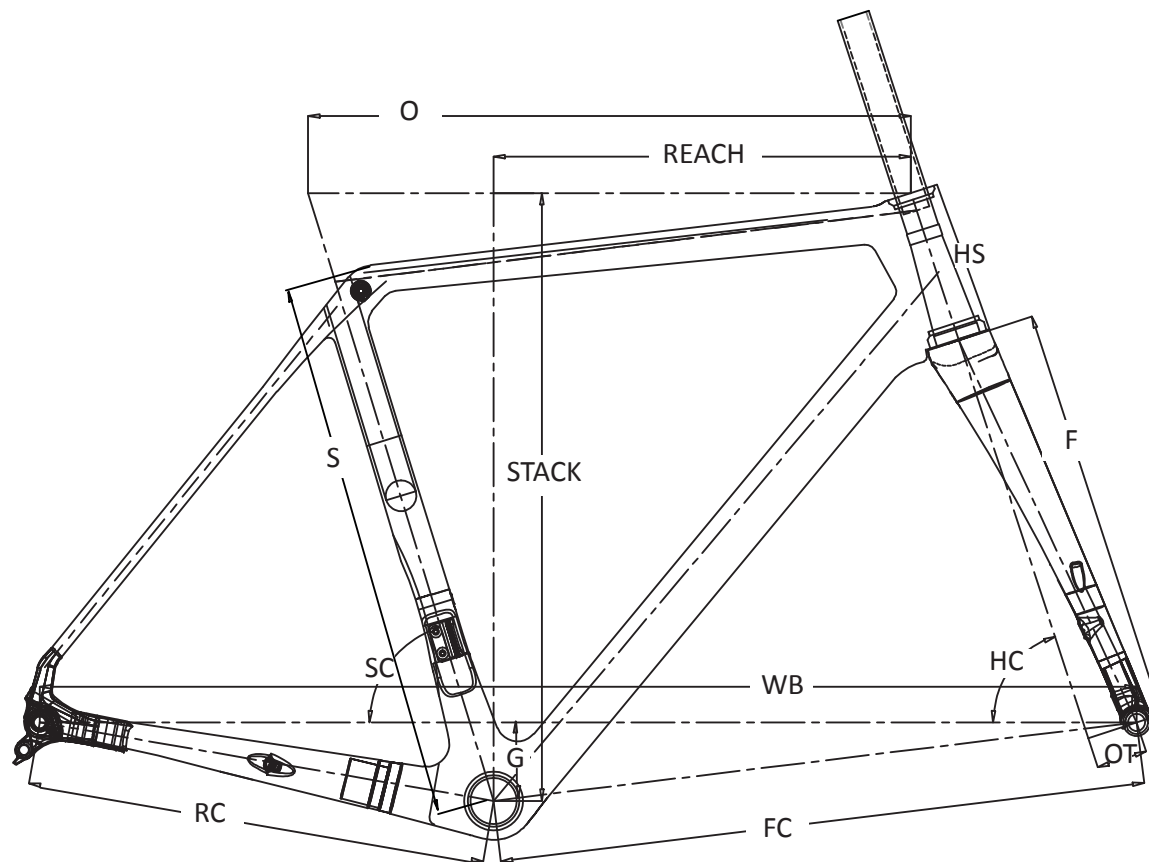

Headset: FSA-NO. 42ACB
UP: 1-1/8"
Bottom: 1.5"


ENDURANCE DISC (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
480	450	73°	517	120	71°	368	45	960.8	565.9	405	69	359.4	516.7
510	469.5	73°	530	135	72°	368	45	964.6	569.8	405	69	367	534.3
540	482.2	73°	549	140	73°	368	45	967.7	572.6	405	69	383.5	542.6
560	496.3	73°	564.9	155	73.5°	368	45	985.6	595.5	405	69	394.5	573
580	518.8	73°	580.9	180	73.5°	368	45	1001.4	606.2	405	69	403.2	582.6

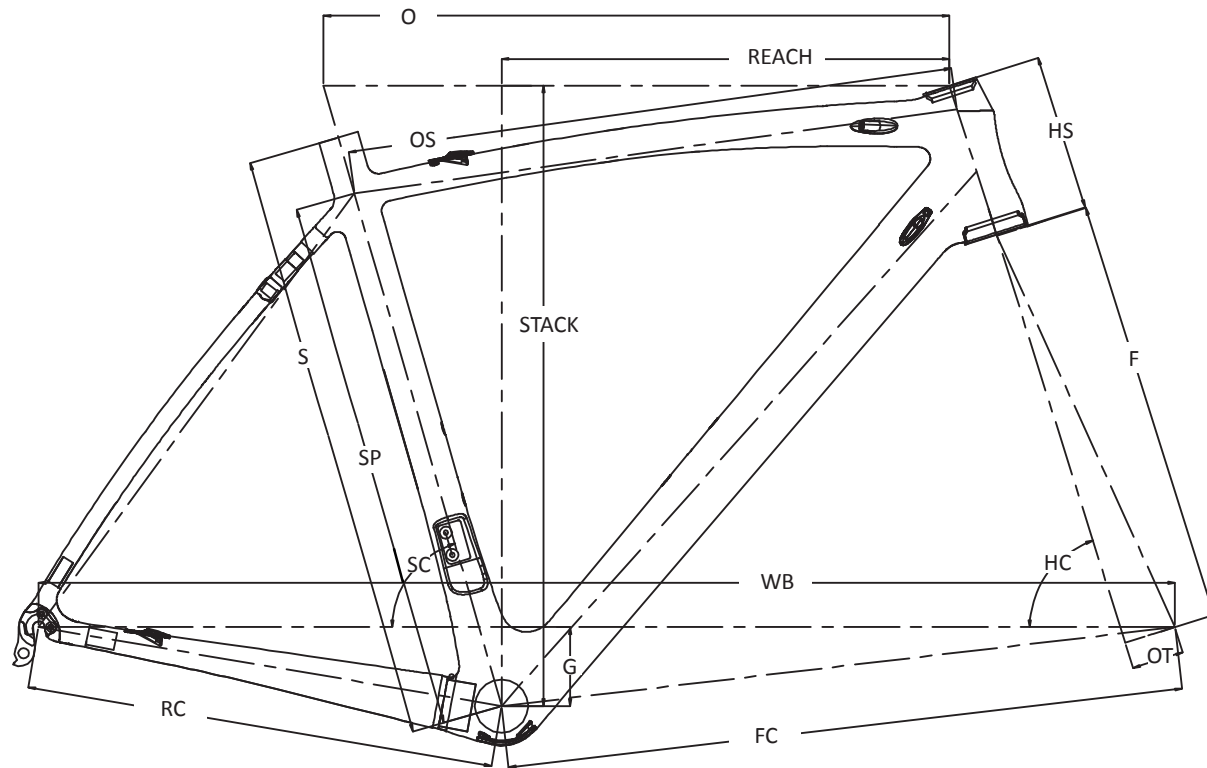


FOX II (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
450	450	400	75°	510	495.5	100	71°	368	45	970.4	575.8	405	70	376.6	498.7
480	480	430	74.5°	525	510	115	72°	368	45	973	578.4	405	70	381.8	516.3
510	510	460	74°	540	524.7	135	72.5°	368	45	980.2	584.9	405	68	386.5	535
540	540	490	73.5°	555	539.7	155	73°	368	45	985.8	590.4	405	68	390.3	555.9
570	570	520	73°	570	555.4	175	73°	368	45	995.5	600.1	405	68	394.2	575

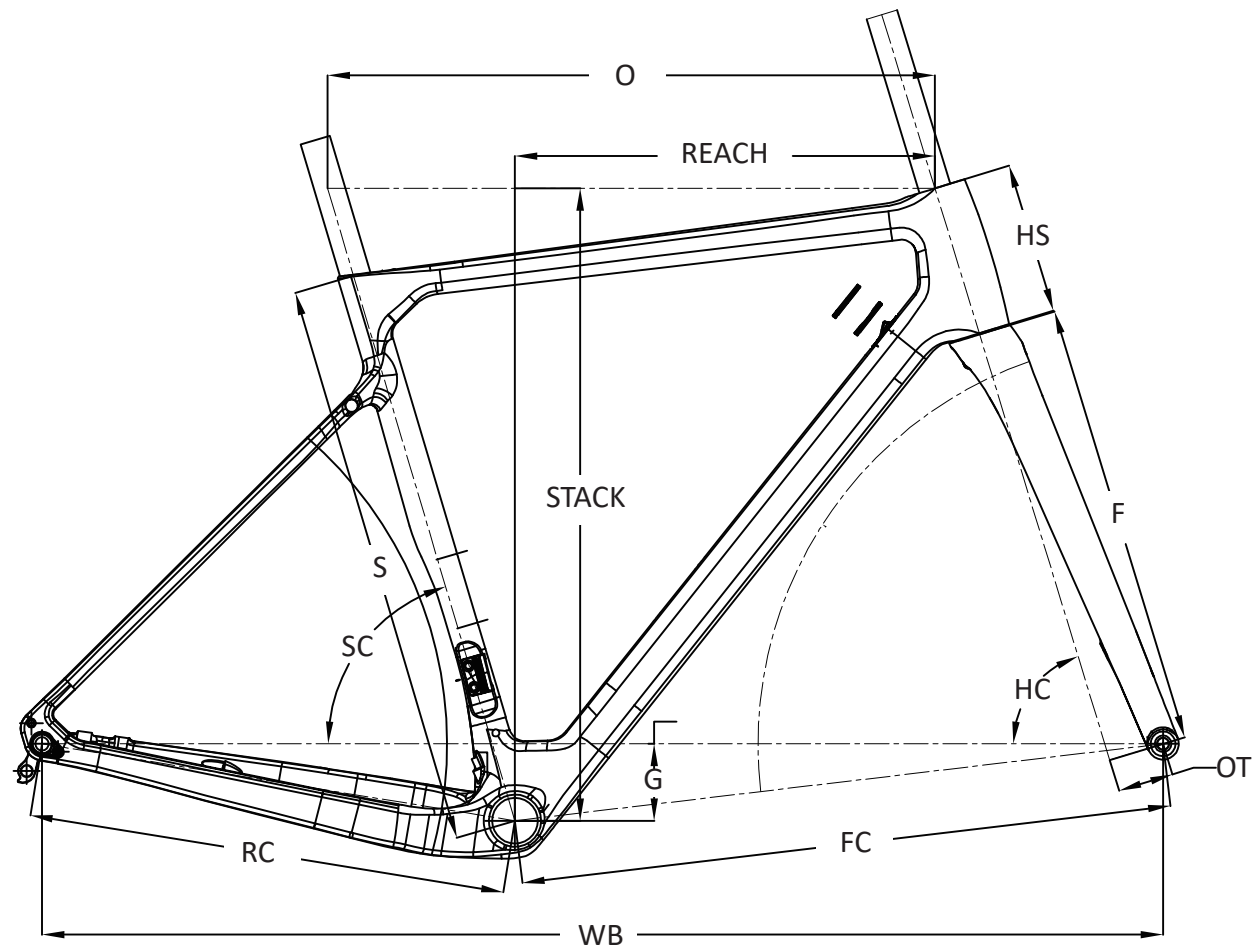


GRAVEL X (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
460	460	74.5°	525	120	70°	400	50	1024	603	430	69	374	541
490	490	74°	540	140	71°	400	50	1026	606	430	69	378	564
510	510	73.5°	555	165	71.5°	400	50	1032	611	430	69	381	589
530	530	73.5°	570	185	71.5°	400	50	1047	627	430	69	390	608
560	560	73°	590	205	72°	400	50	1056	636	430	69	397	629

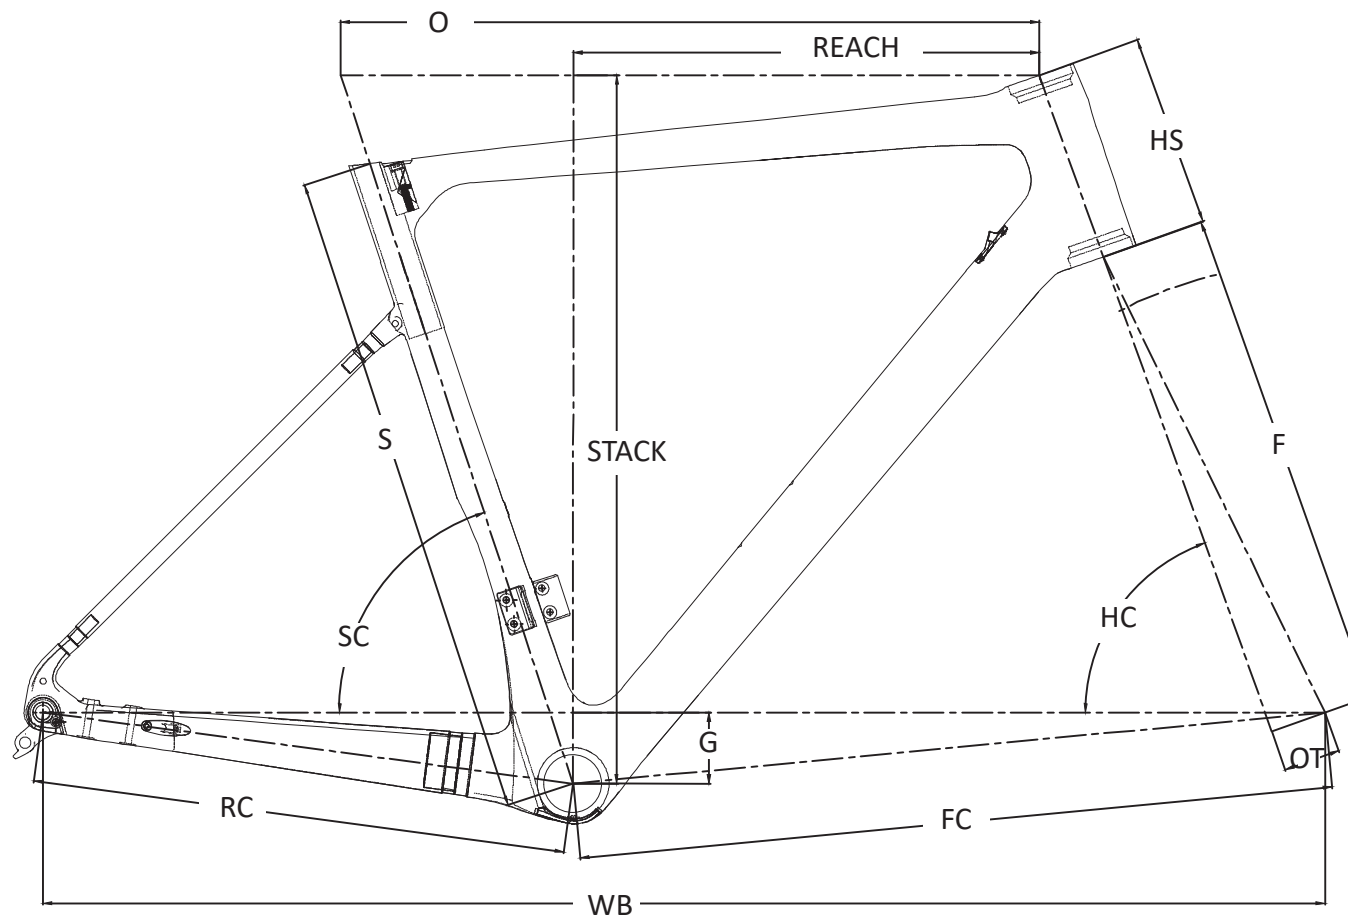


GRAVEL 2 (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
520	499	73°	545	133	70°	398	55	1006	586.5	425	63	361.1	551.2
540	529	72.5°	555	153	70.5°	398	55	1018	600	425	63	370	571.2
560	549	72°	565	168	70.5°	398	55	1028	609.5	425	63	375.4	586.1
580	569	71.5°	580	180	71°	398	55	1035	616.5	425	63	387.8	601.5

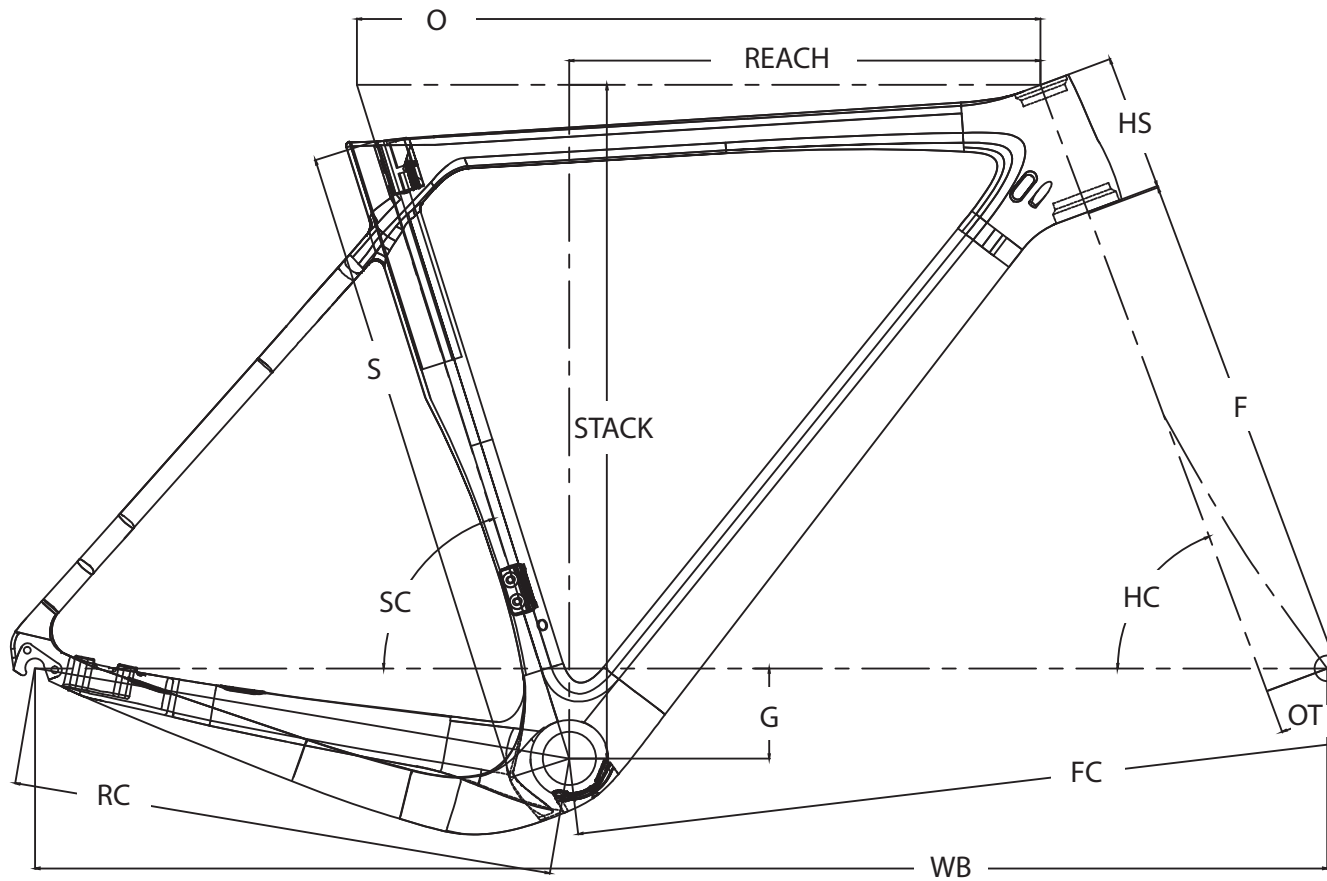


GRAVEL (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
500	500	72.5°	528	105	69.5°	395	50	1001	592	420	70	365	522
535	530	72.5°	549	130	71°	395	50	1008	598	420	70	376	551
560	560	72.5°	570	155	72.5°	395	50	1014	604	420	70	387	580
590	590	72.5°	591	180	72.5°	395	50	1032	622	420	70	398	609

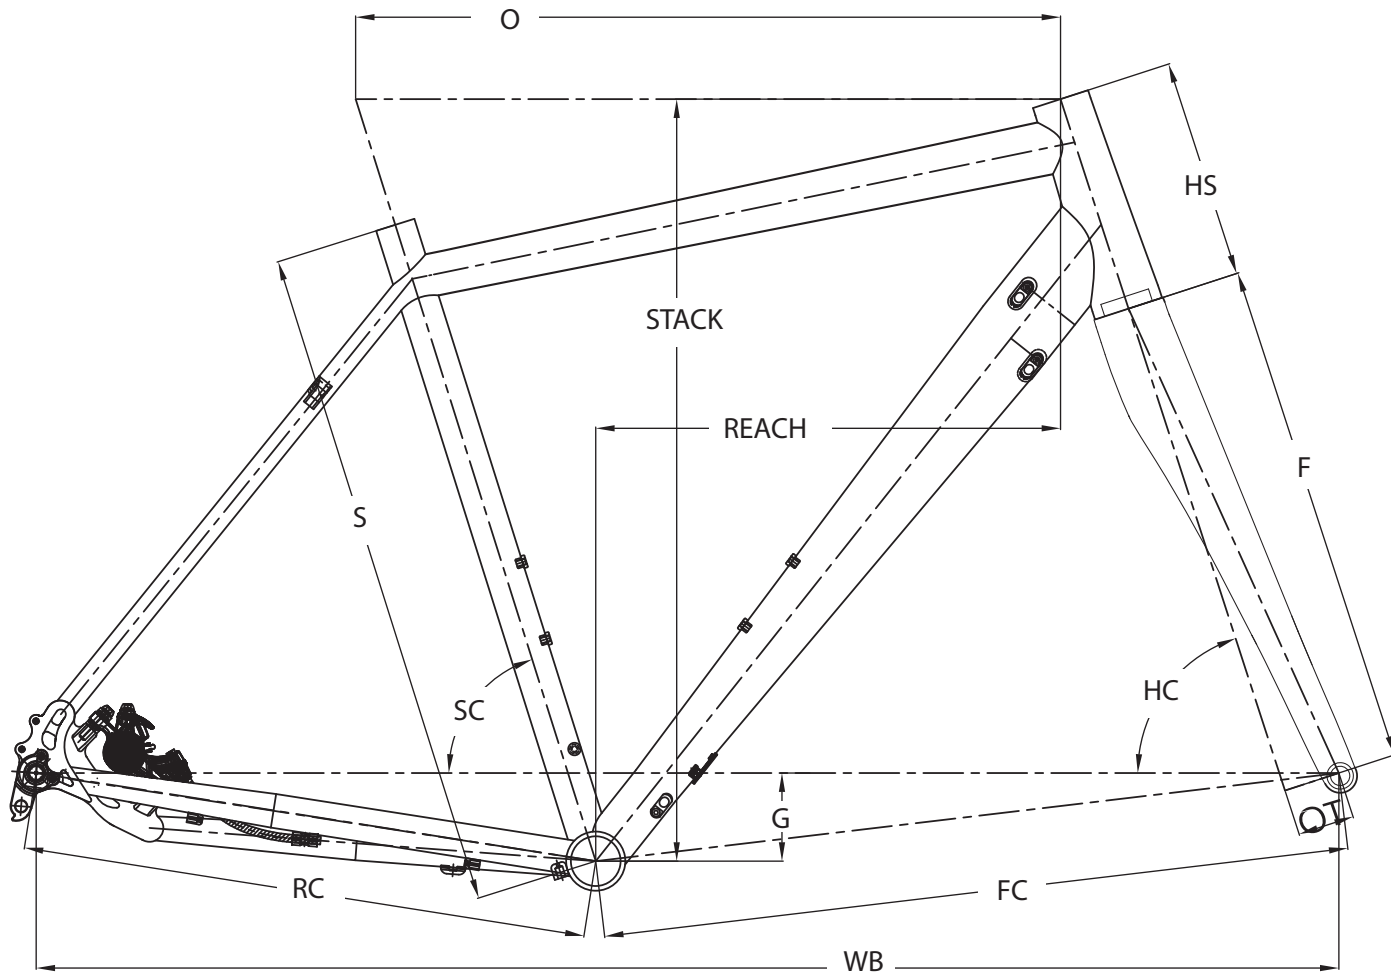


GRAVEL ALU (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
450	455	74.5°	515	100	70°	405	45	1027	580	450	70	368.6	527.7
490	495	73.5°	535	120	70.5°	405	45	1035	586	450	70	372.5	548.4
520	520	73°	550	140	70.5°	405	45	1045	592	450	70	376.6	567.3
540	540	73°	565	160	71.5°	405	45	1050	598	450	70	384.6	590.1
570	575	72.5°	580	185	72°	405	45	1055	604	450	70	385.8	615.8
600	605	72°	600	210	72°	405	45	1070	622	450	70	392.2	639.6

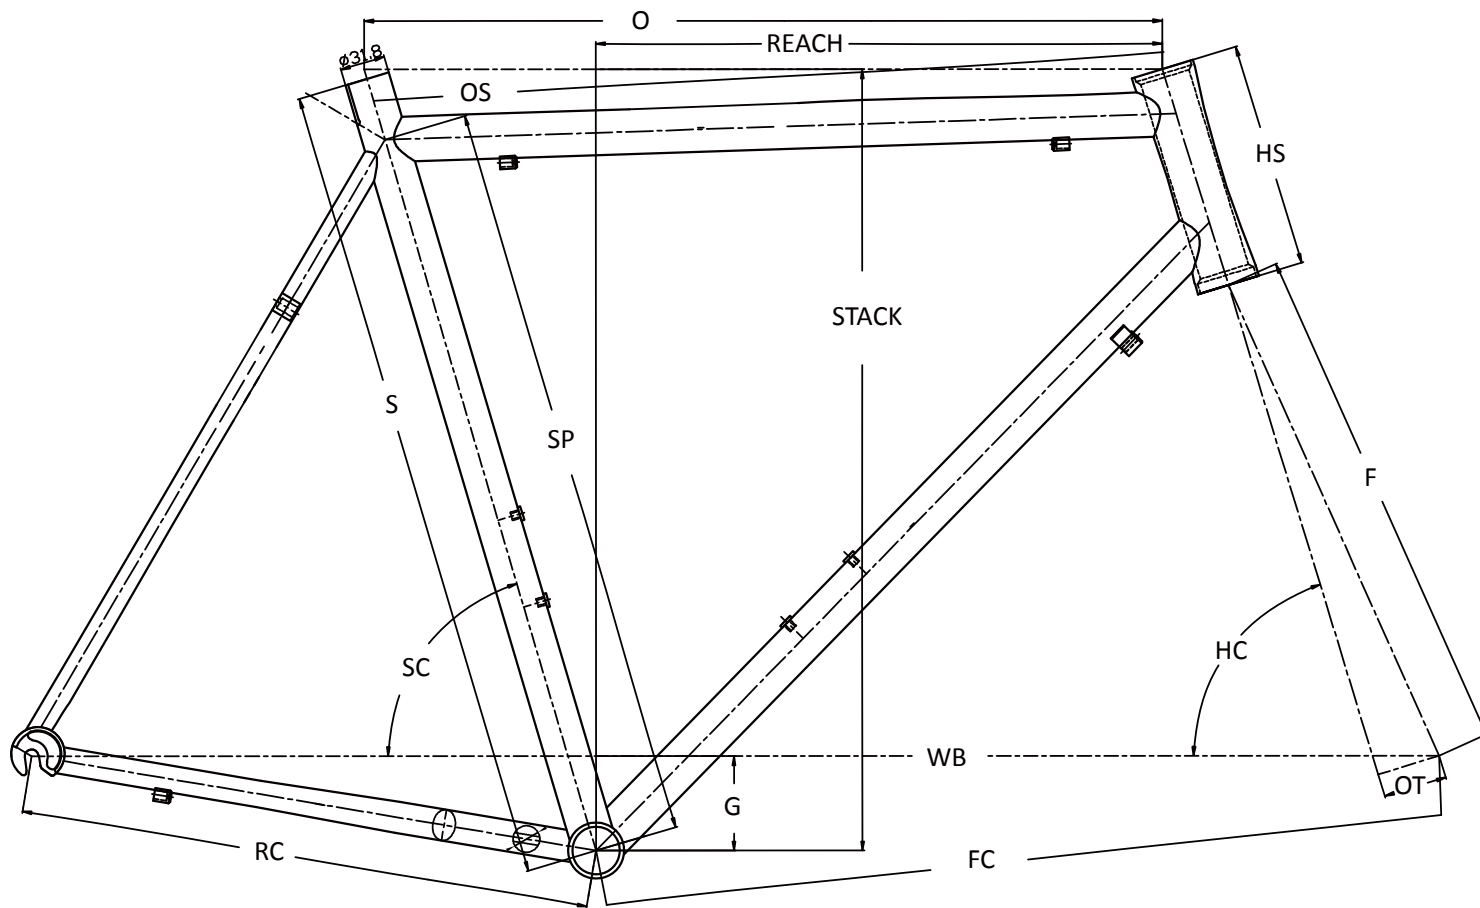


ASCETIC (Length: mm/ Angel: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
510	510	465	74°	520	516.1	102	72.5°	365	45	959.7	564.22	405	67	377.74	496.21
530	530	485	74°	535	530.9	120	73°	365	45	970.8	575.27	405	67	387.35	515
550	550	505	73.5°	550	545.1	140	73°	365	45	981.1	585.5	405	67	391.81	534.13
570	570	525	73.5°	565	560.15	160	73°	365	45	996.3	600.6	405	67	401.14	553.25
590	590	545	73°	575	569.31	180	73°	365	45	1003	605.29	407	67	400.01	572.37

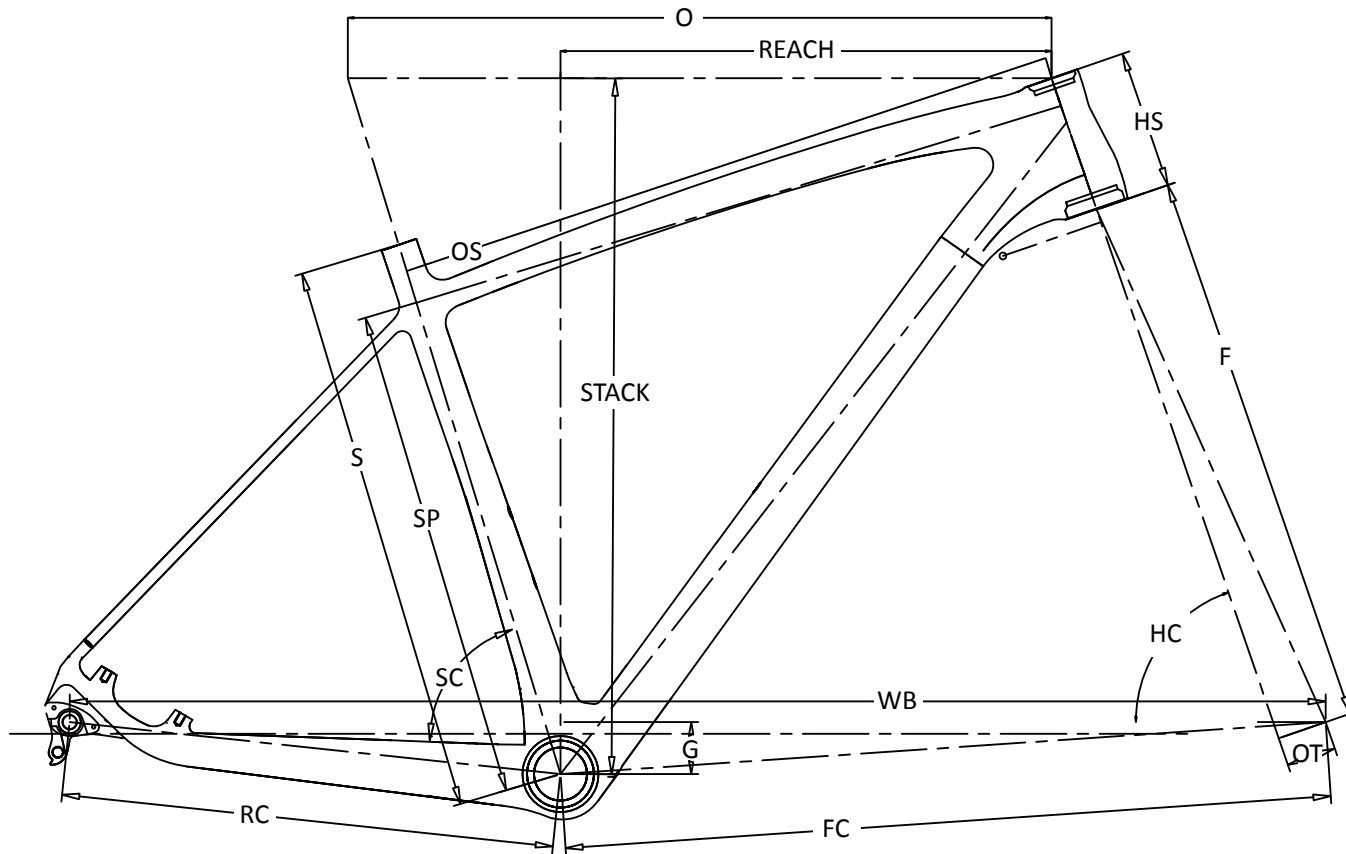


PICCOLO 650B SL (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
15.5"	400	347.3	73.5°	570	555.9	101	70°	485	43	1064.4	640.3	428	45	398	581
17.5"	435	381.6	73°	595	570.8	115	70.5°	485	43	1078	654	428	45	410.1	598.1
19"	480	427.1	73°	610	584.2	120	71°	485	43	1089.1	665	428	45	425.7	603.4
20.5"	520	466.9	73°	625	599.1	130	71°	485	43	1104.5	680.3	428	45	437.8	618

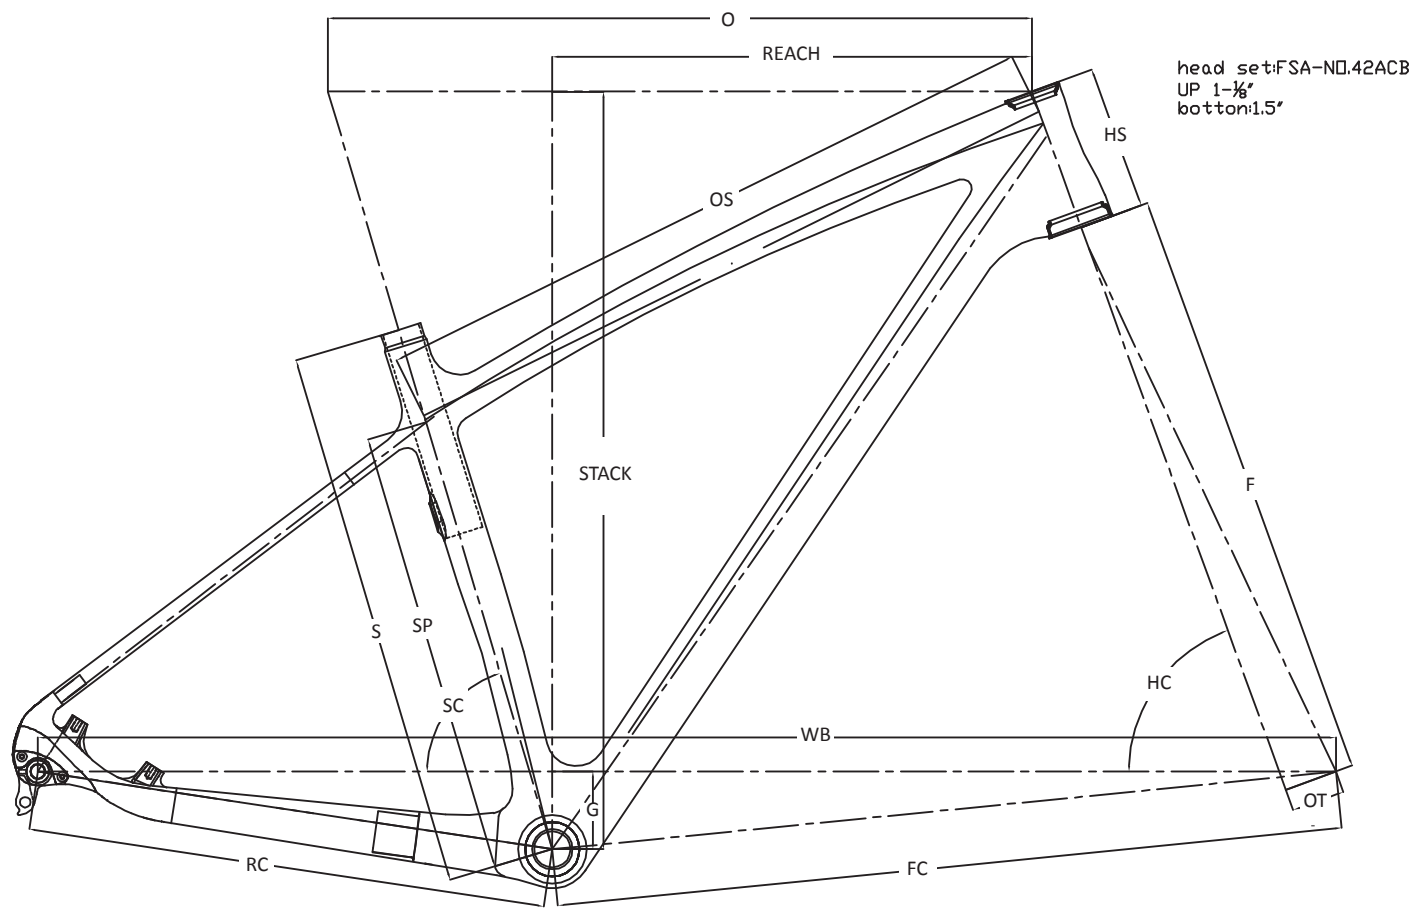


PICCOLO 29ER (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
16"	406.5	330.8	73.7°	570.8	567	105	70.7°	506	45	1066.7	635.1	440	65.5	387.3	627.5
18"	458	376.3	73.5°	594	578.5	120	71°	506	45	1084.6	652.8	440	65.5	403.2	643
20"	508	419.5	73.3°	615	590.3	130	72.7°	506	45	1103.9	672	440	65.5	419.3	652.4

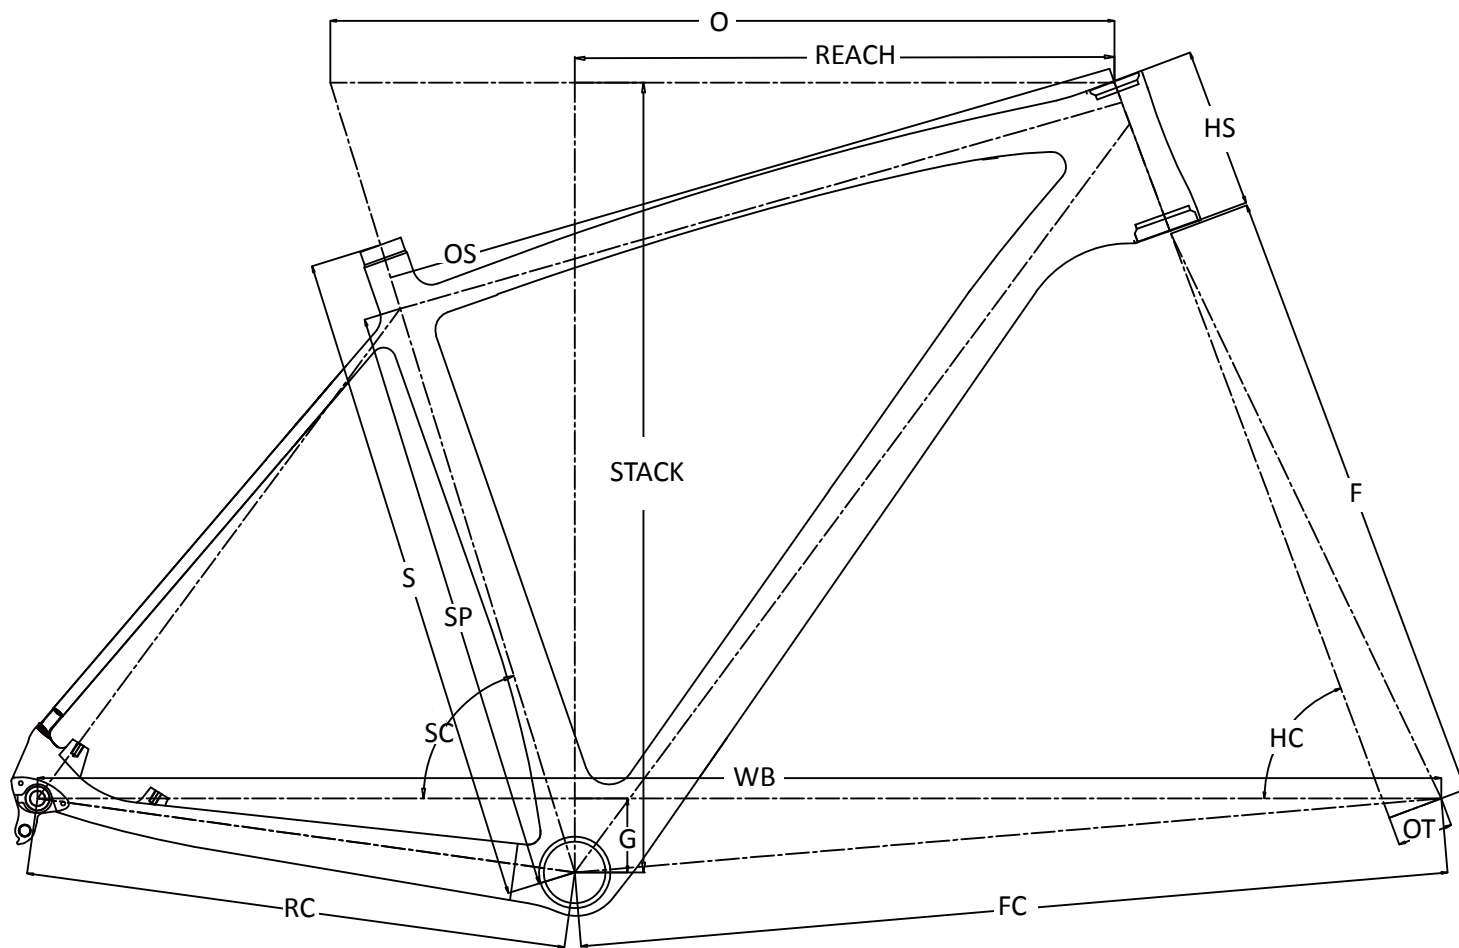


PICCOLO 29ER SL (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
15.5"	395	341	72.5°	580	555	100	69.5°	506	45	1077.4	644.3	440	60	387.1	611.9
17.5"	440	385	72.5°	600	572	105	69.5°	506	45	1097.7	664.5	440	60	405	618
19"	483	431.3	72.5°	620	584.7	120	69.5°	506	45	1117.6	684.3	440	60	419.8	632.1
21"	533	478.2	72.5°	640	606.5	130	69.5°	506	45	1139.3	705.7	440	60	438	640.8

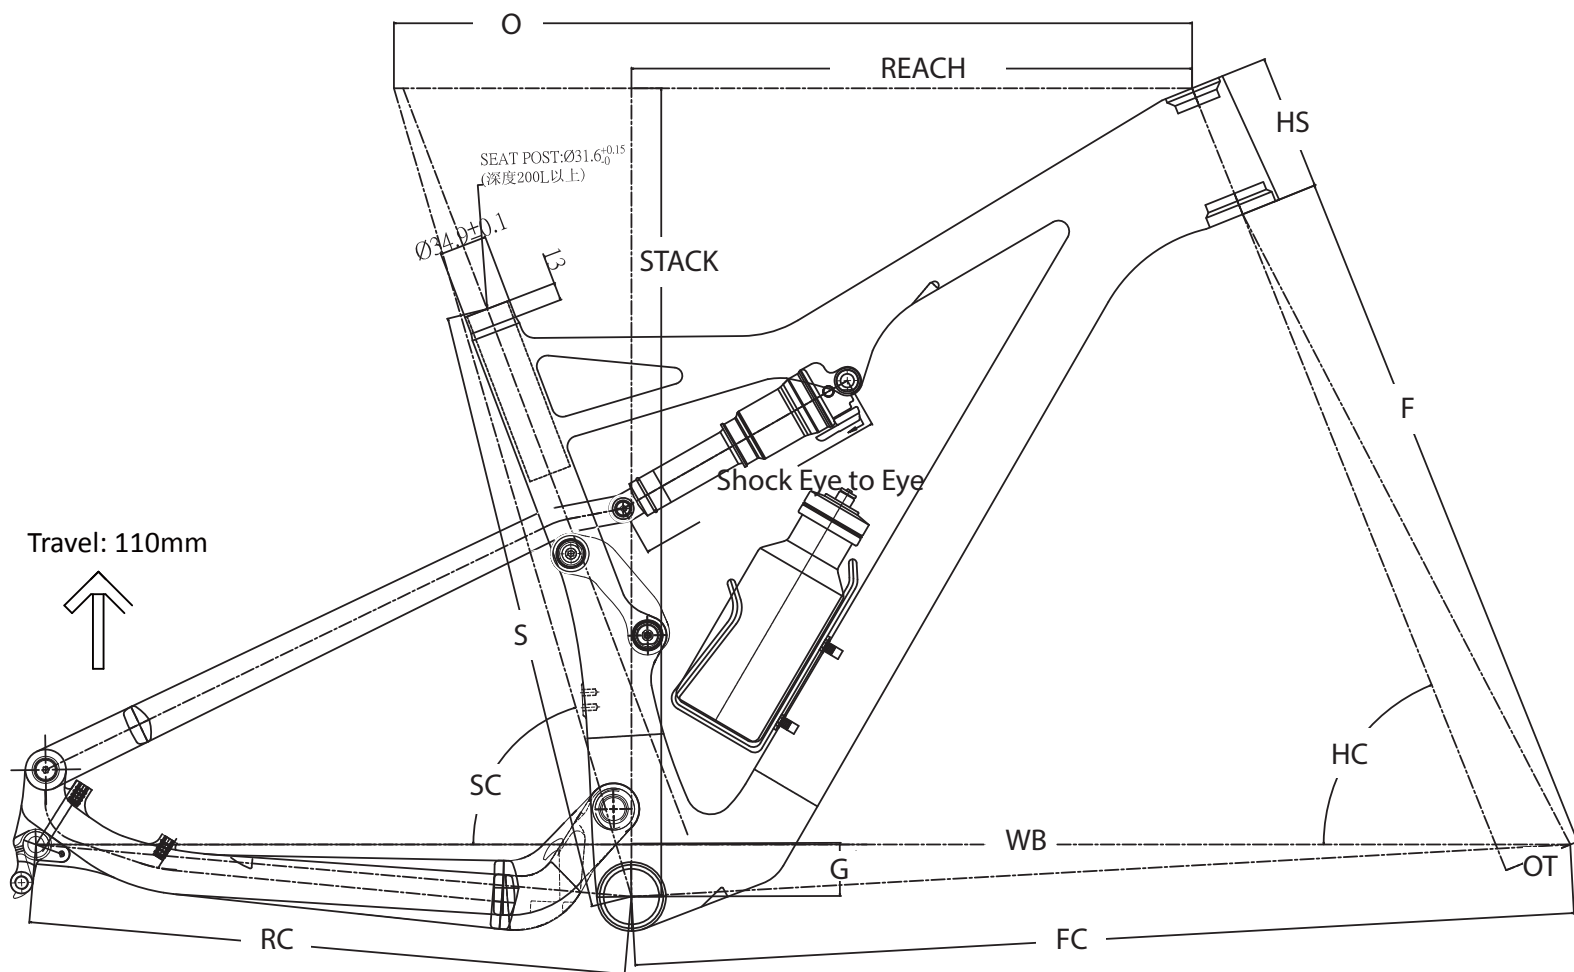


PYRENEES 650B (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack	Travel	Shock Eye to Eye
15.5"	395	74.5°	559	95	69°	502	51	1098	662.1	435	45	397.6	582	110	190
17.5"	445	74.5°	585	100	69°	502	51	1117.7	686.6	435	45	412.7	588.7	110	190
19"	483	74.5°	600	115	69°	502	51	1141	705.1	435	45	433.4	600.7	110	190
20.5"	520	74.5°	630	125	69°	502	51	1172	736.1	435	45	460.8	610	110	190

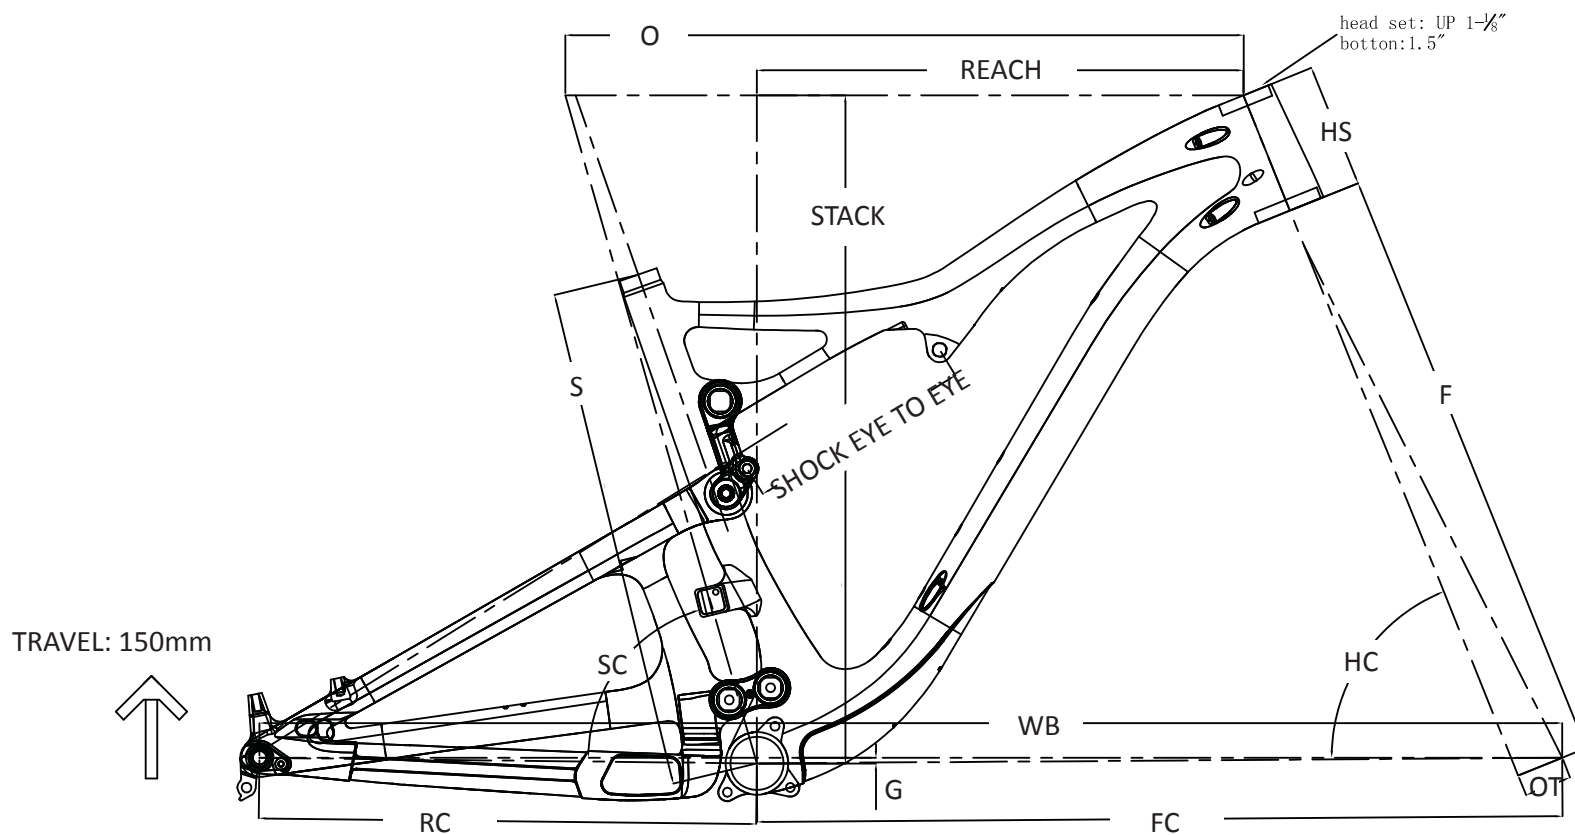


PYRENEES 650B AM PRO 150 (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK	Travel	Shock Eye to Eye
15.5"	400	74°	580	100	68°	540	45	1134.7	694.8	440	5	413.2	591	150	200
17.5"	445	74°	600	110	68°	540	45	1155.5	715.5	440	5	430.2	591	150	200
19"	483	74°	620	120	68.5°	540	45	1171	731	440	5	447.1	602.9	150	200
20.5"	520	74°	640	130	68.5°	540	45	1191	751	440	5	463.5	612.2	150	200

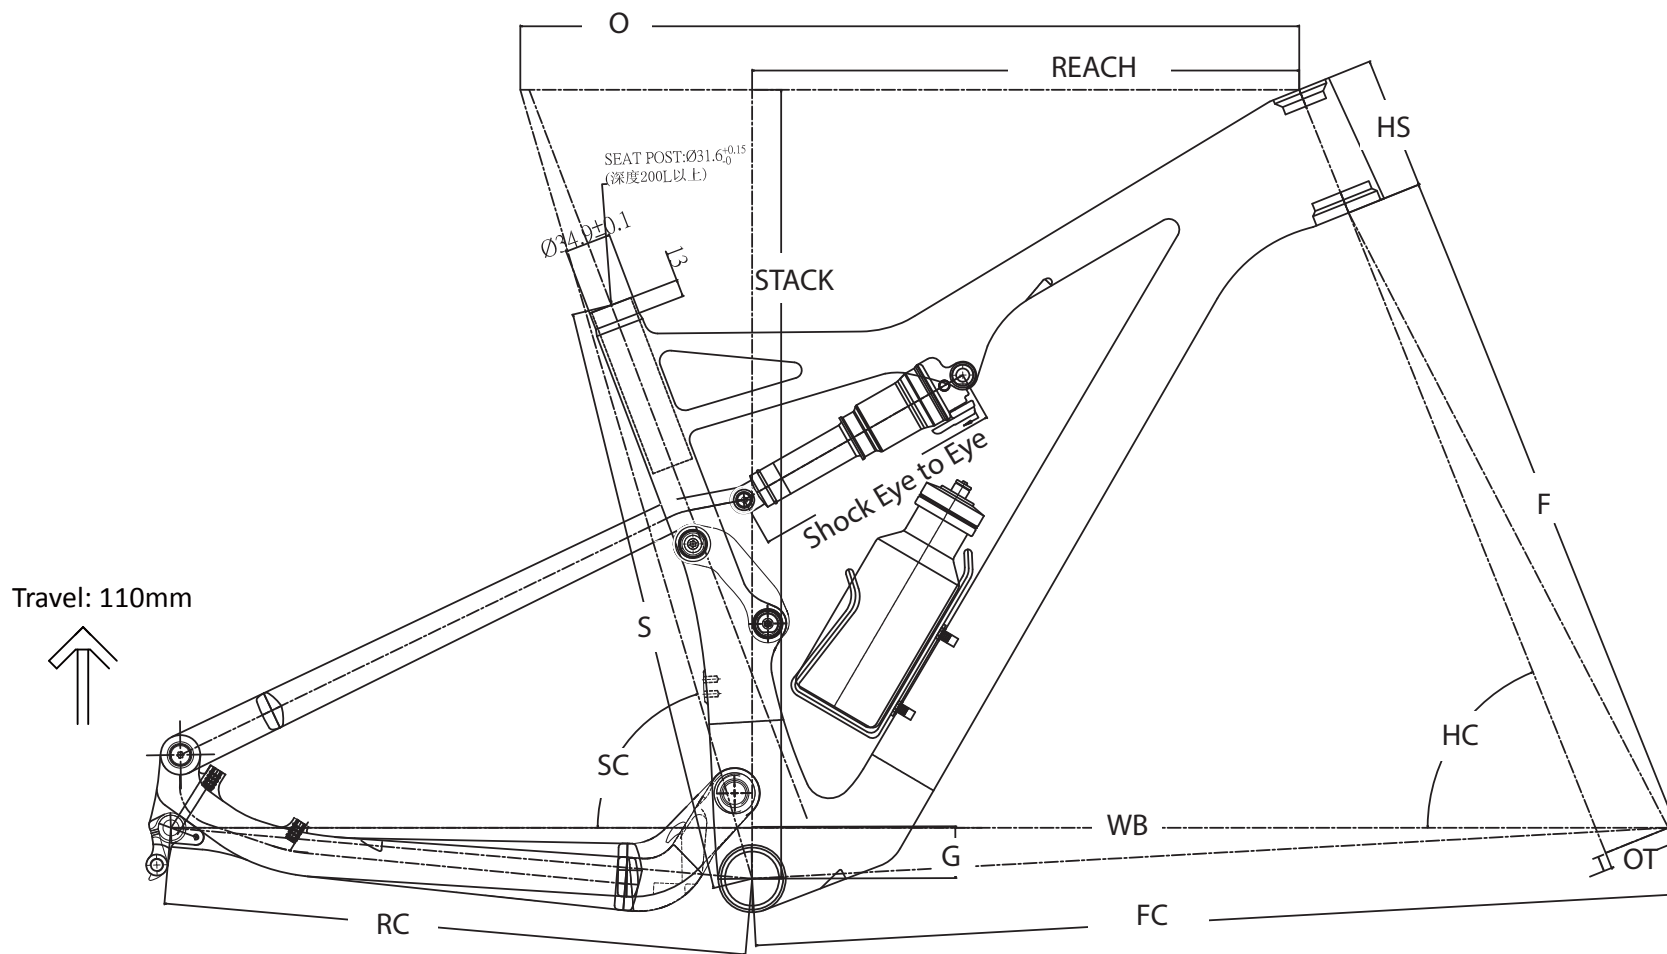


PYRENEES 29ER (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack	Travel	Shock Eye to Eye
15.5"	395	73.6°	560.5	95	68°	520	51	1105.5	668.1	440	38	386.9	589.2	110	190
17.5"	445	73.6°	587.5	100	68°	520	51	1129.5	692.1	440	38	412.7	595.1	110	190
19"	483	73.6°	602	115	68°	520	51	1149	711.4	440	38	422.4	608.5	110	190
20.5"	520	73.6°	632	125	68°	520	51	1180	742.6	440	38	449.6	618.3	110	190

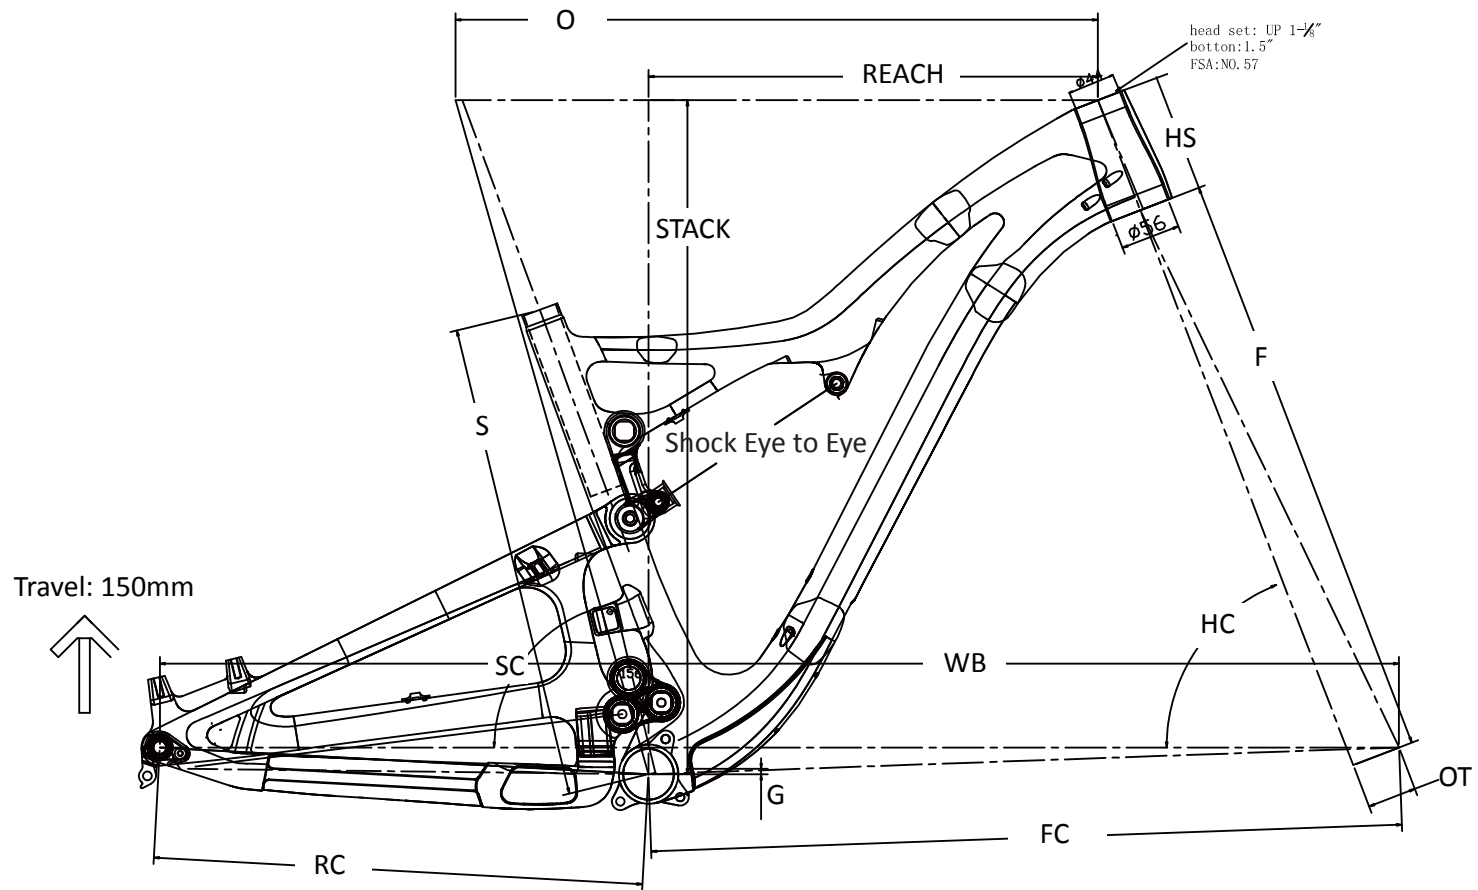


PYRENEES 29ER AM PRO 150 (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack	Travel	Shock Eye to Eye
15.5"	400	74°	580	100	69°	550	46	1136.2	680	457	25	402.2	620	150	200
17.5"	440	74°	600	110	69°	550	46	1157	701	457	25	419.5	629.3	150	200
19"	480	74°	620	120	69°	550	46	1178	722	457	25	436.8	638.7	150	200
21"	530	74°	640	135	69°	550	46	1198.9	743	457	25	454.2	648	150	200

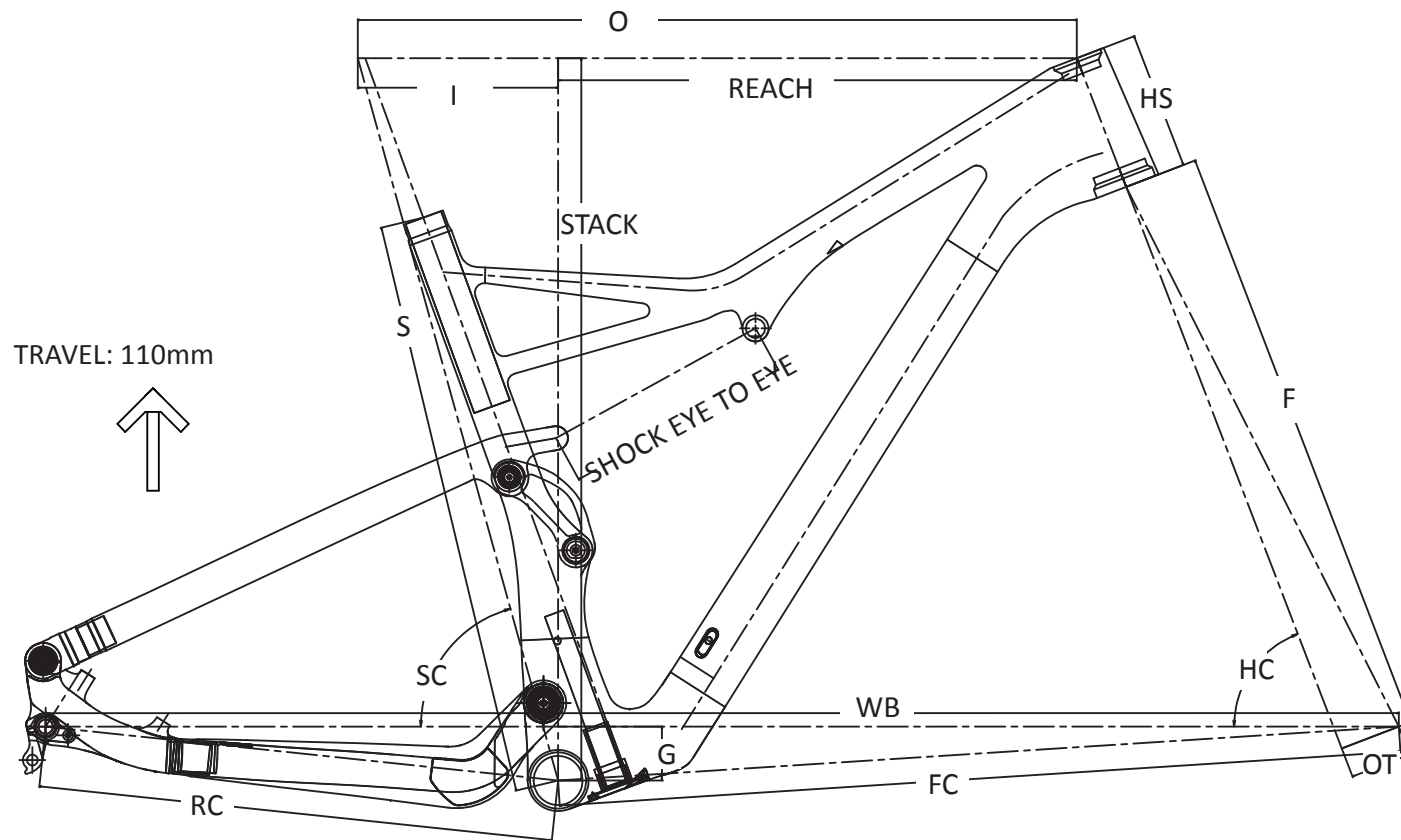


PYRENEES PLUS (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	I	REACH	STACK	Travel	Shock Eye to Eye
15.5	395	74.5°	558.2	95	69°	502	51	1100.6	659.4	445	45	162.6	395.6	584.8	110	190
17.5	445.5	74.5°	585	100	69°	502	51	1127.8	686.6	445	45	163.3	421.7	588.7	110	190
19	483	74.5°	600	115	69°	502	51	1144.3	703	445	45	167.1	432.9	602.7	110	190
20.5	520	74.5°	630	125	69°	502	51	1175.3	733.9	445	45	169.7	460.5	612.1	110	190

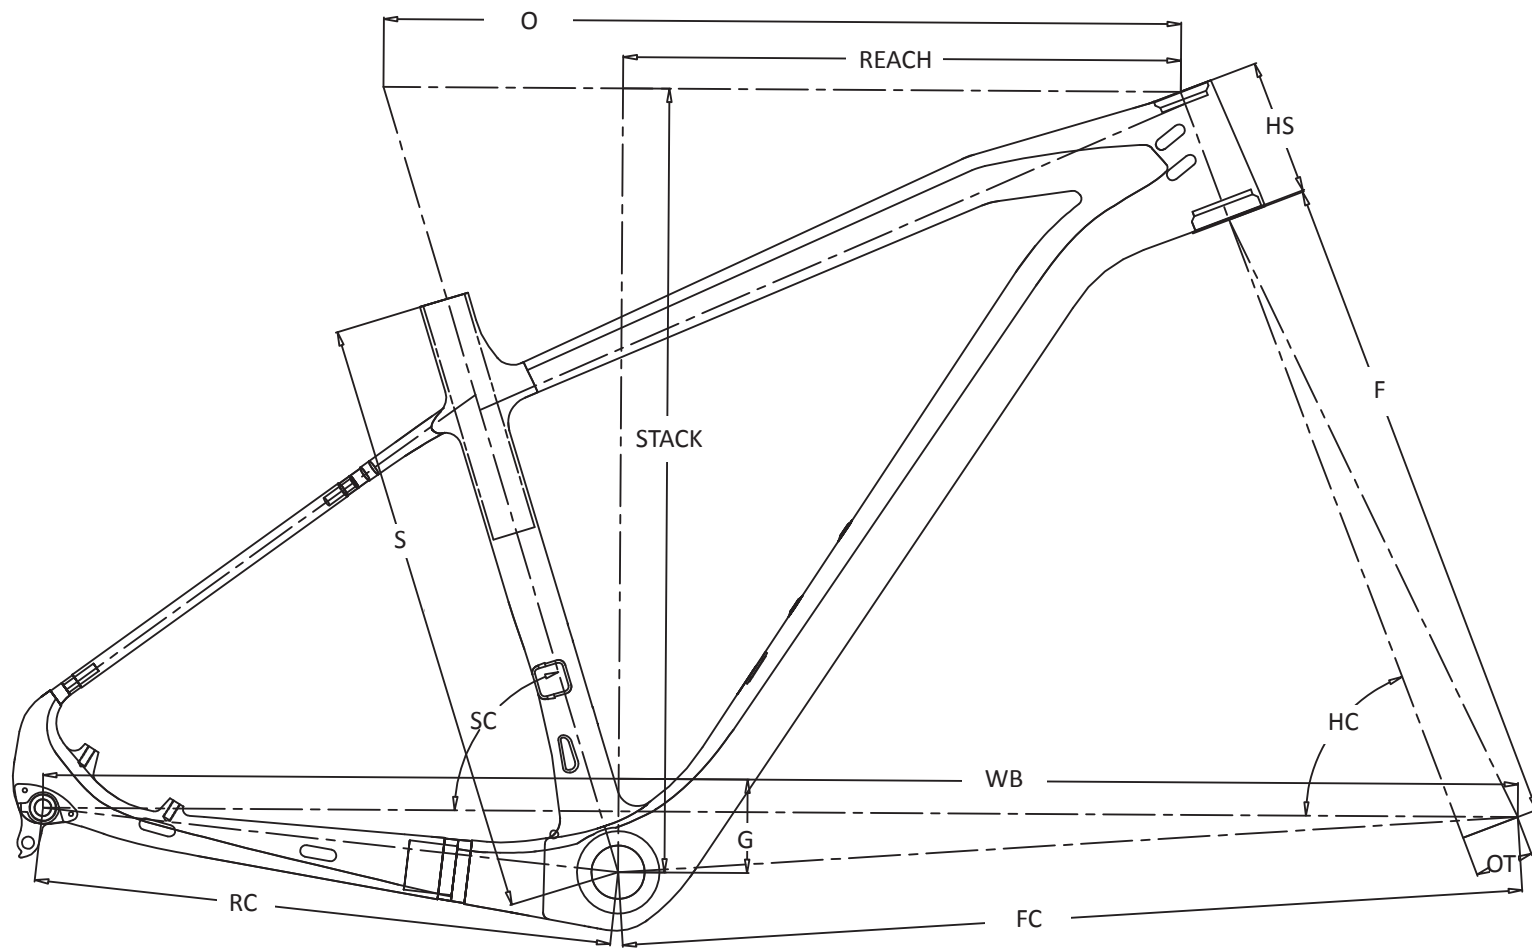


PHAETON 650B (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
15.5"	400	73°	562	95	69°	485	43	1073.4	650.3	427	45	398	561
17.5"	440	73°	587.6	100	69°	485	43	1087.4	664.4	427	45	410.9	578.1
19"	480	73°	602	105	69°	485	43	1098.1	675	427	45	425.7	583.4
20.5"	520	73°	617	110	69°	485	43	1113.5	690.3	427	45	437.8	598

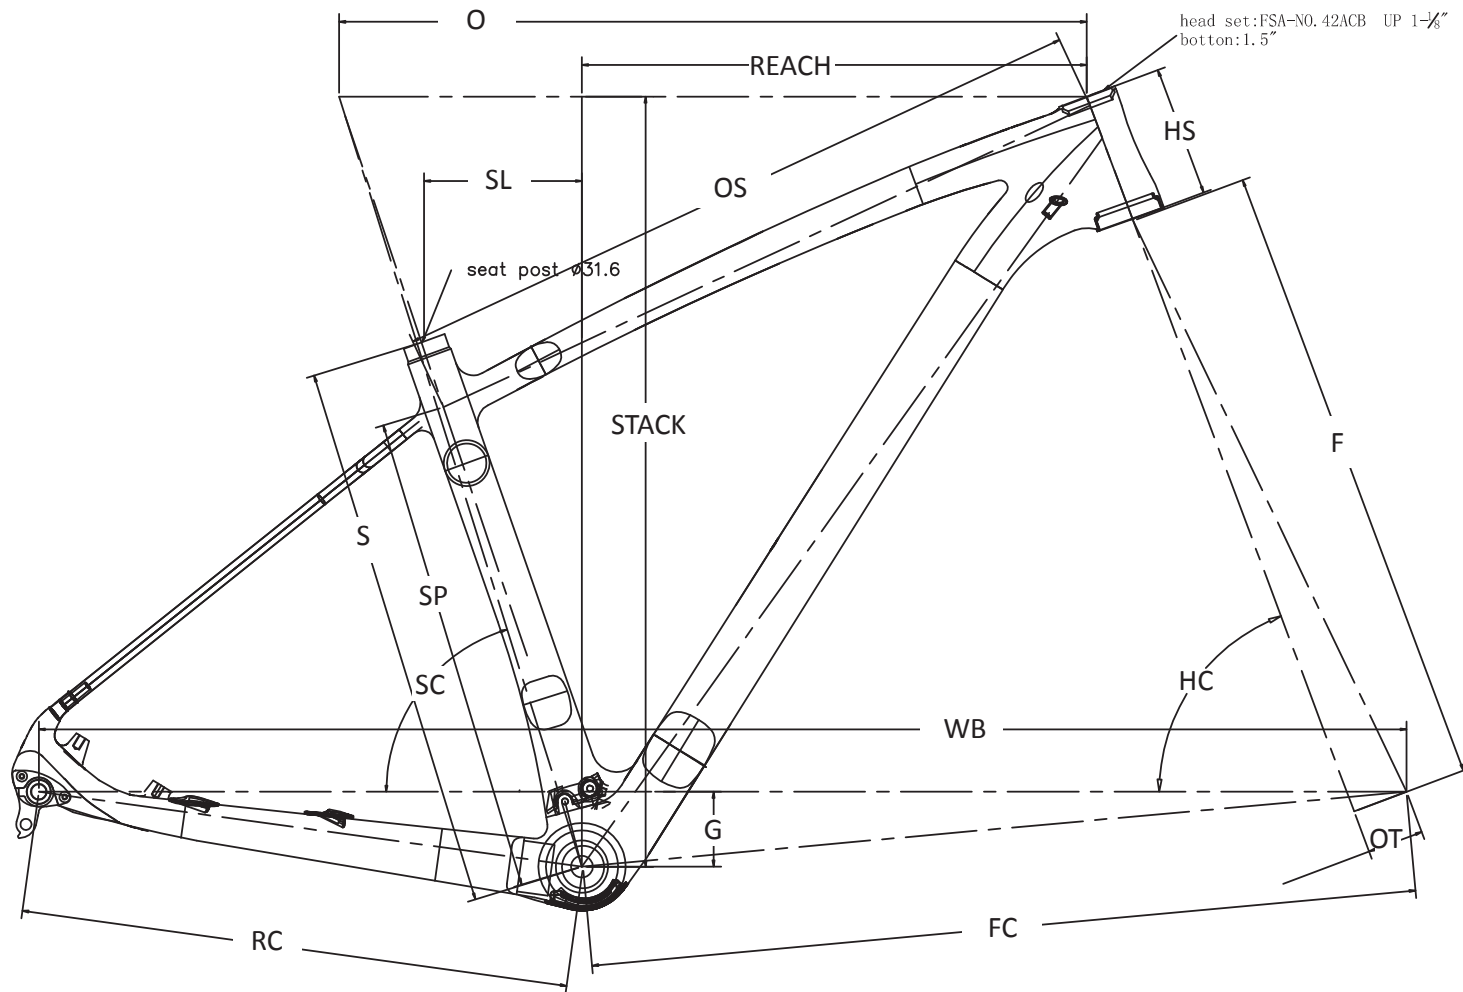

PHAETON 650B PLUS (Length: mm/ Angle: °)


SIZE	S	SP	SC	SL	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
15.5"	395	341	72.5°	110.8	580	555	100	69.5°	506	45	1077.4	644.3	440	60	387	612
17.5"	440	385	72.5°	126.6	600	572	105	69.5°	506	45	1097.7	664.5	440	60	405	618
19"	483	431.3	72.5°	140.4	620	584.7	120	69.5°	506	45	1117.6	684.3	440	60	420	632
21"	533	478.2	72.5°	157.6	640	606.5	130	69.5°	506	45	1139.3	705.7	440	60	438	641

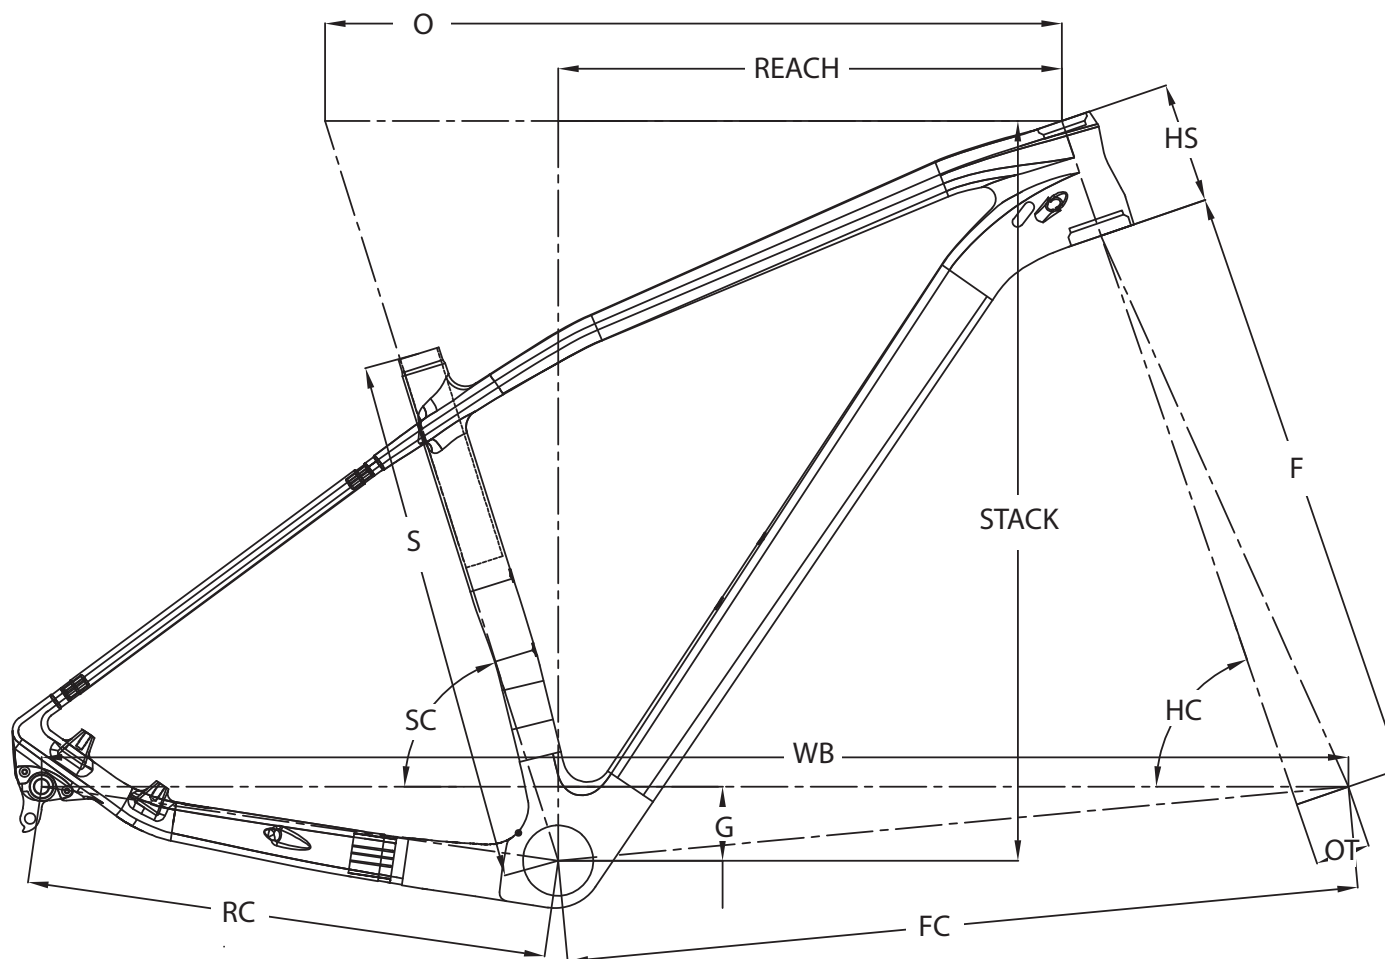

Head set: FSA No. 42ACB
 UP: 1-1/8"
 Bottom: 1- 1/2"

PHAETON 29ER SL (Length: mm/ Angle: °)


SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
15.5	394	72.5°	561.2	90	71°	496	46	1050	627.4	430	61	390	600
17	433.4	72.5°	590.2	100	71°	496	46	1078	655.1	430	61	414.7	609.4
19	468.7	72.5°	617	105	71°	496	46	1105	682	430	61	436.9	623.7

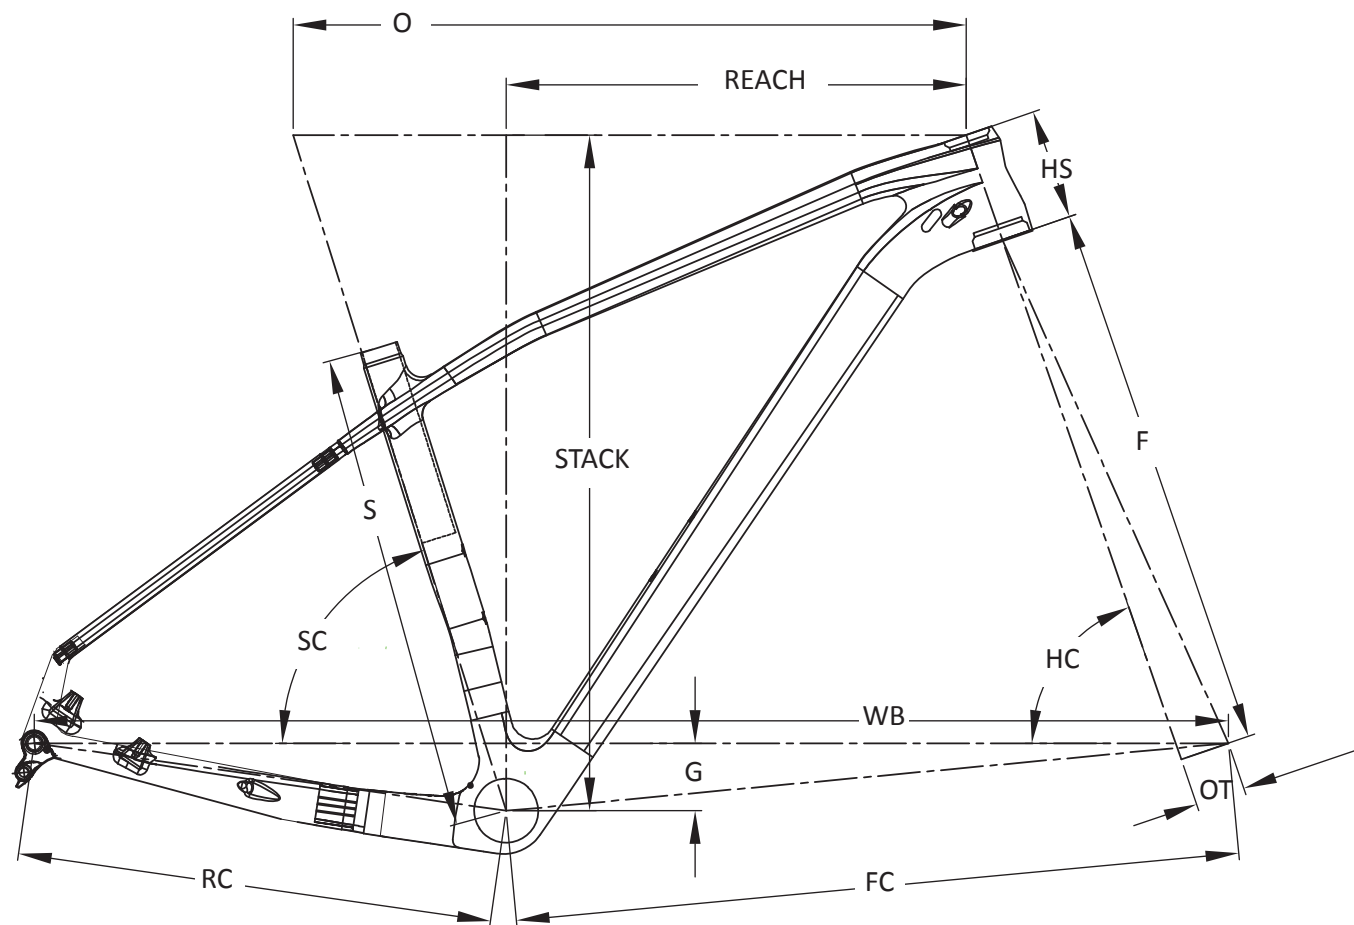

Headset: FSA-No. 42ACB
UP: 1-1/8"
Bottom: 1.5"


PHAETON 29ER BOOST SL (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
15.5	394	72.5°	561.2	90	71°	496	46	1050	627.4	430	61	390	600
17	433.4	72.5°	590.2	100	71°	496	46	1078	655.1	430	61	414.7	609.4
19	468.7	72.5°	617	105	71°	496	46	1105	682	430	61	436.9	623.7

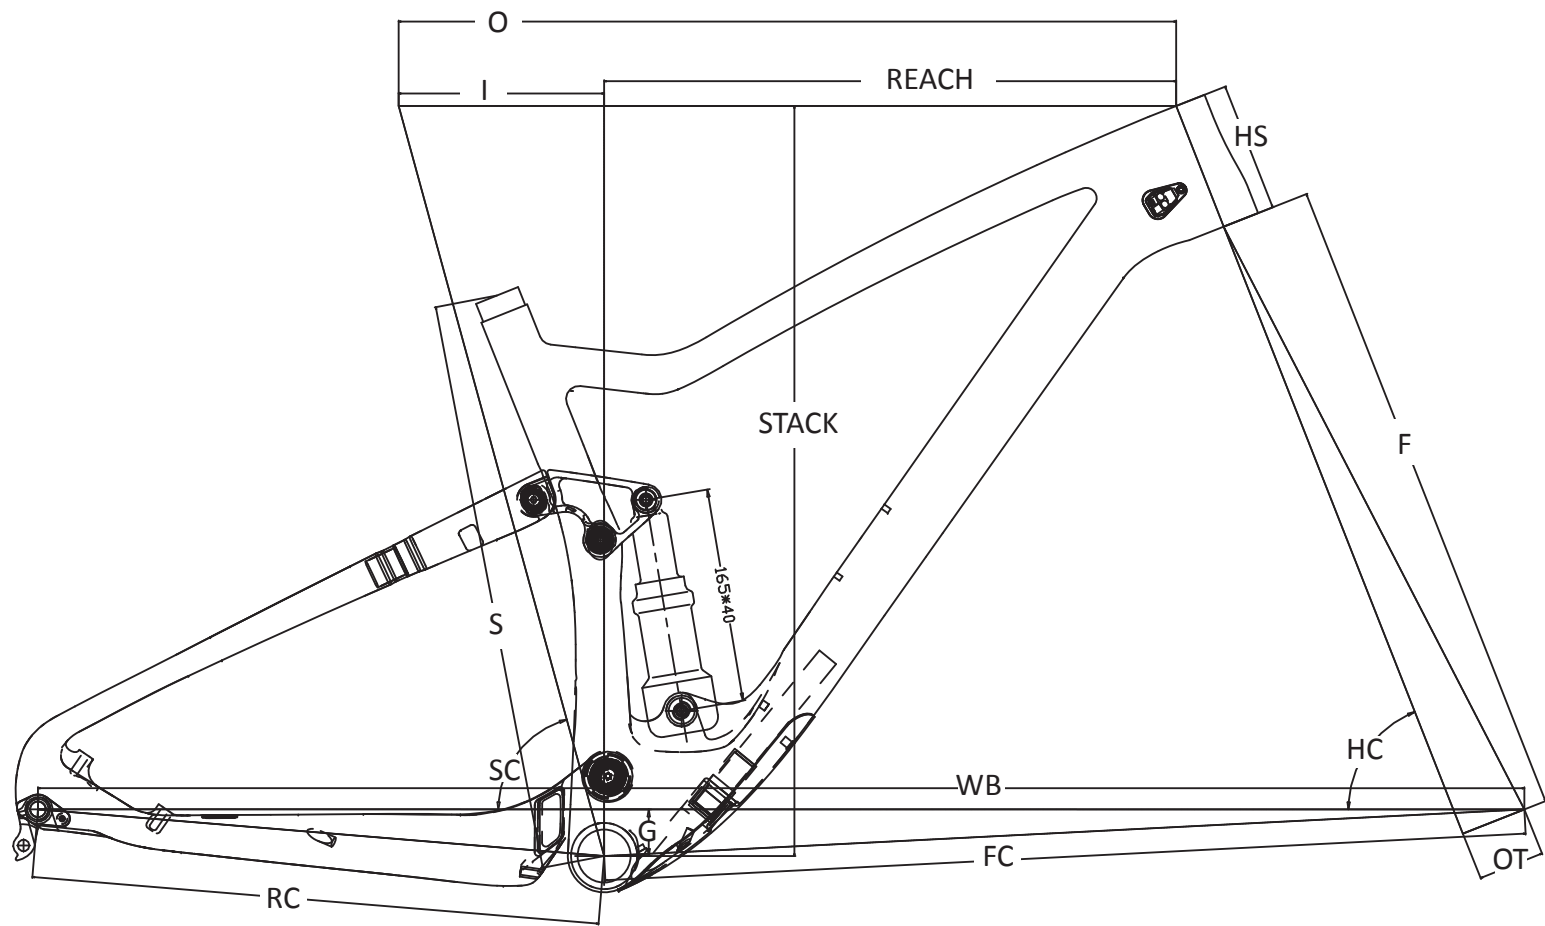

PYTHON ONE 29ER BOOST (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	I	REACH	STACK	Travel (A)	Shock Eye to Eye (A)	Travel (B)	Shock Eye to Eye (B)
S	410	74.7°	570	95	68.5°	502	51	1116	680.4	438	36	157.1	412.9	573.6	38.1	165.1	40	165
M	440	74.7°	600	100	68.5°	502	51	1146	710.4	438	36	158.4	441	578.3	38.1	165.1	40	165
L	490	74.7°	630	105	68.5°	502	51	1177.1	741.5	438	36	159.7	469.3	582.9	38.1	165.1	40	165
XL	540	74.7°	650	115	68.5°	502	51	1198.2	762.6	438	36	162.2	487.8	592.2	38.1	165.1	40	165

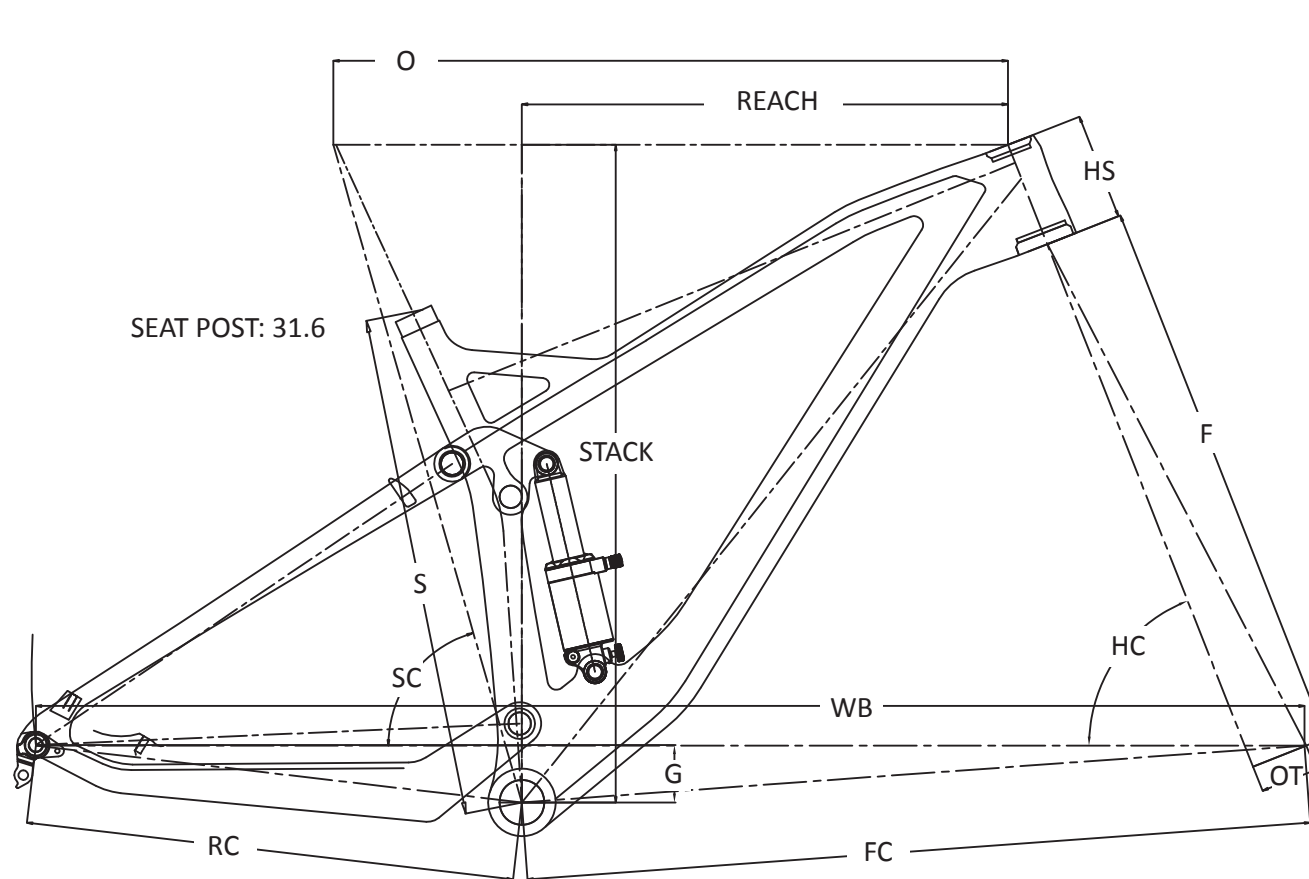


Head set: FSA- No. 42ACB

UP: 1-1/8"

Bottom: 1-1/2"


PYTHON X 29ER BOOST (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK	Travel	Shock Eye to Eye
15.5"	395	74°	570	95	69°	500	51	1092.2	662	435	50.5	396	587	38.1	165.1
17.5"	445	74°	600	95	69°	500	51	1124	693	435	50.5	429.5	587	38.1	165.1
19"	483	74°	630	105	69°	500	51	1145.6	715.3	435	50.5	456.8	596	38.1	165.1
21"	533	74°	650	115	69°	500	51	1167.5	737.2	435	50.5	474	605	38.1	165.1

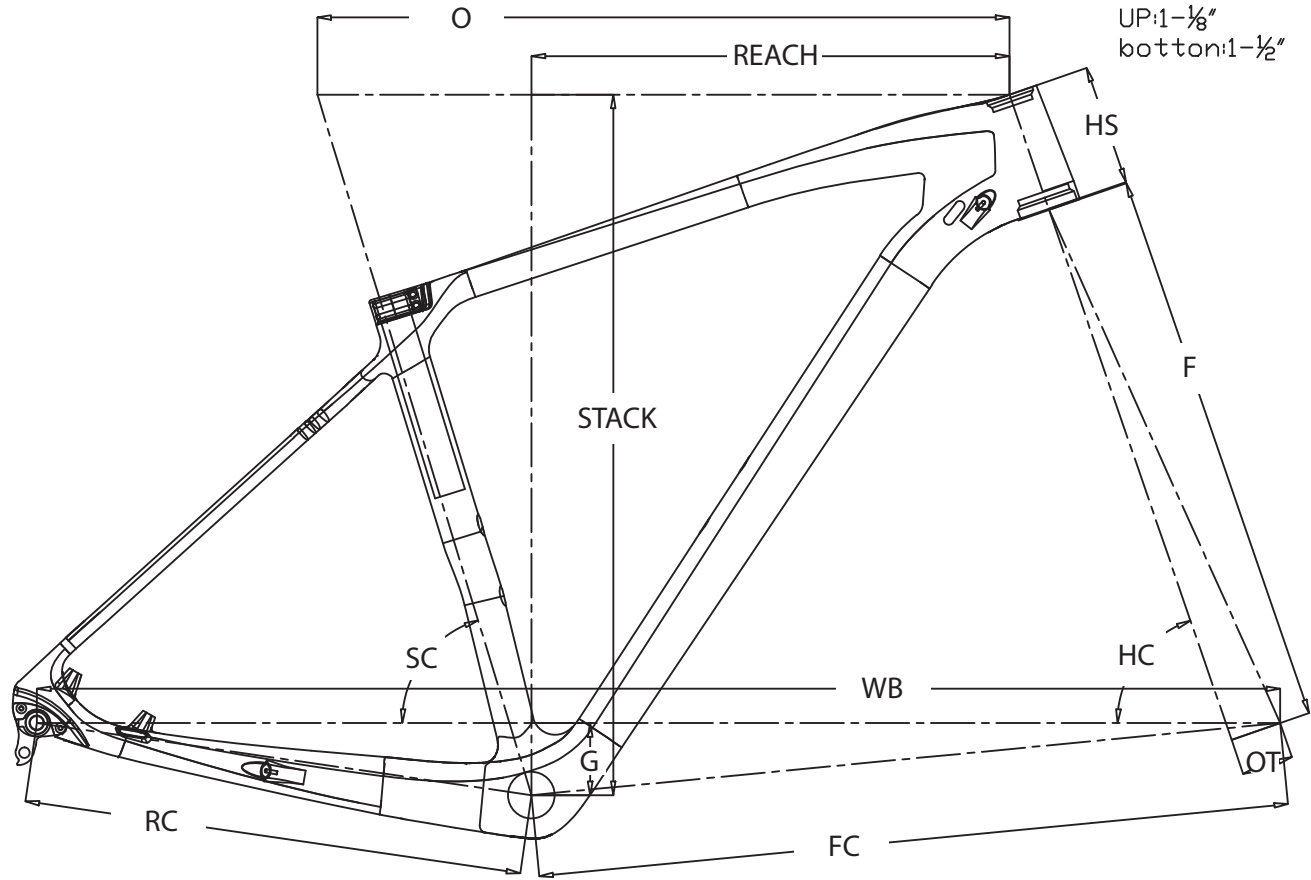


PAX (Length: mm/ Angle: °)

SIZE	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
16"	73°	575	95	71°	490	45	1056.9	627.6	437	63	391.4	601.4
18"	73°	605	105.5	71°	490	45	1086.9	657.5	437	63	418	612.5
20"	73°	625	110	71°	490	45	1107.3	677.6	437	63	436.6	615.8

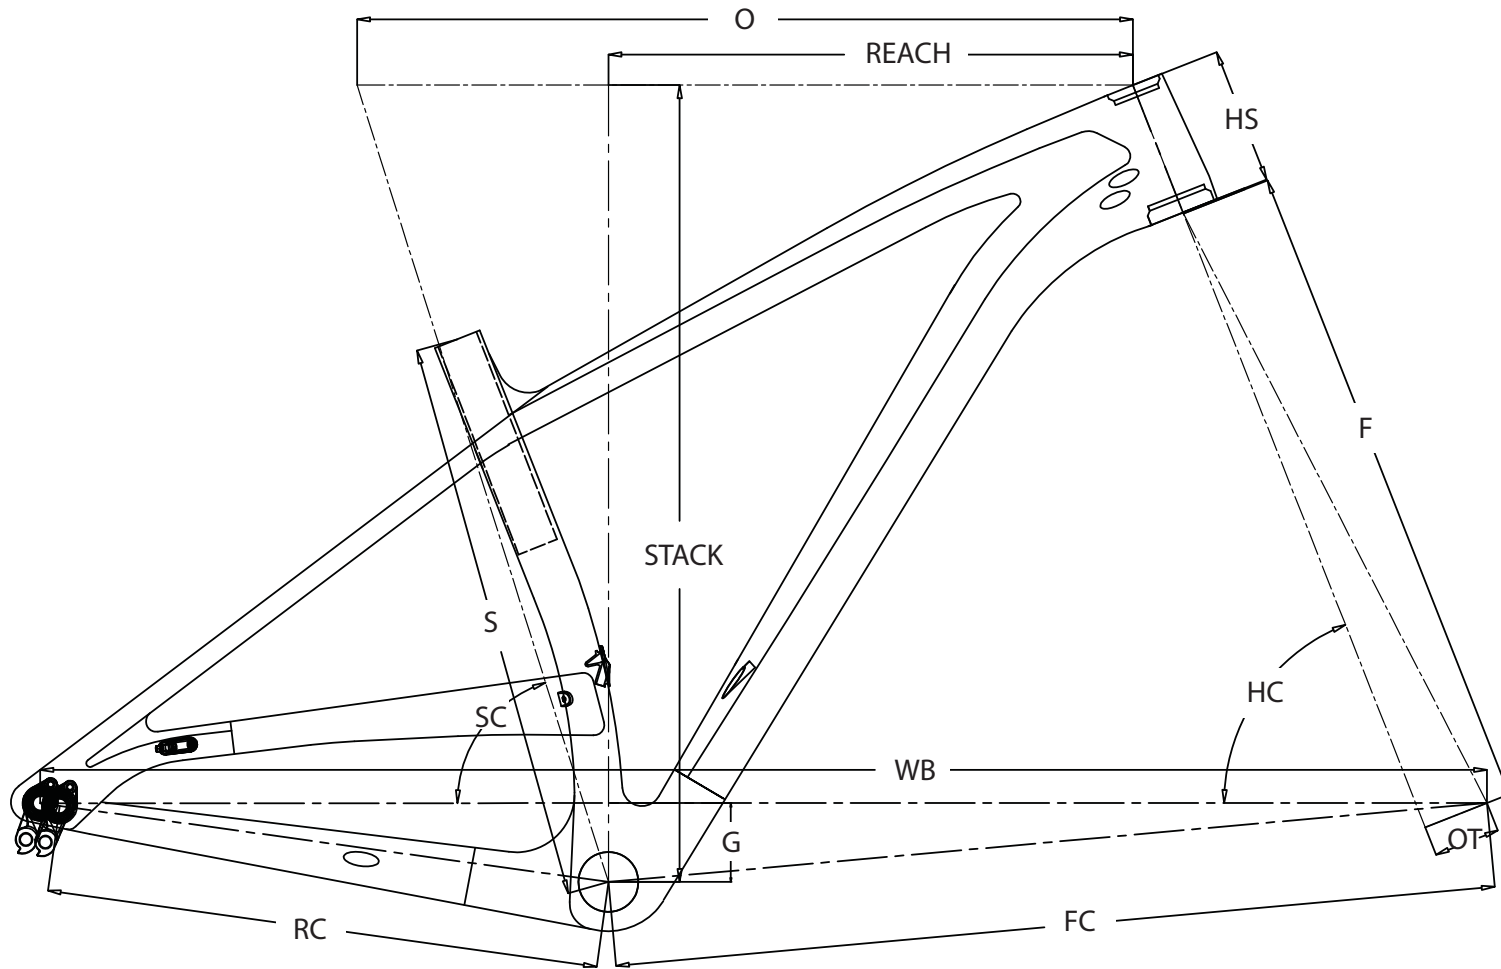


PHANTOM (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
17"	432	72.5°	595	105	68.5°	506	51	1109.8	676.7	425	60	402.3	611.3
19"	483	115°	617	110	68.5°	506	51	1131.8	698.6	425	60	422.4	616
21"	533	125°	639	115	68.5°	506	51	1154.6	721.3	425	60	443.3	620.7

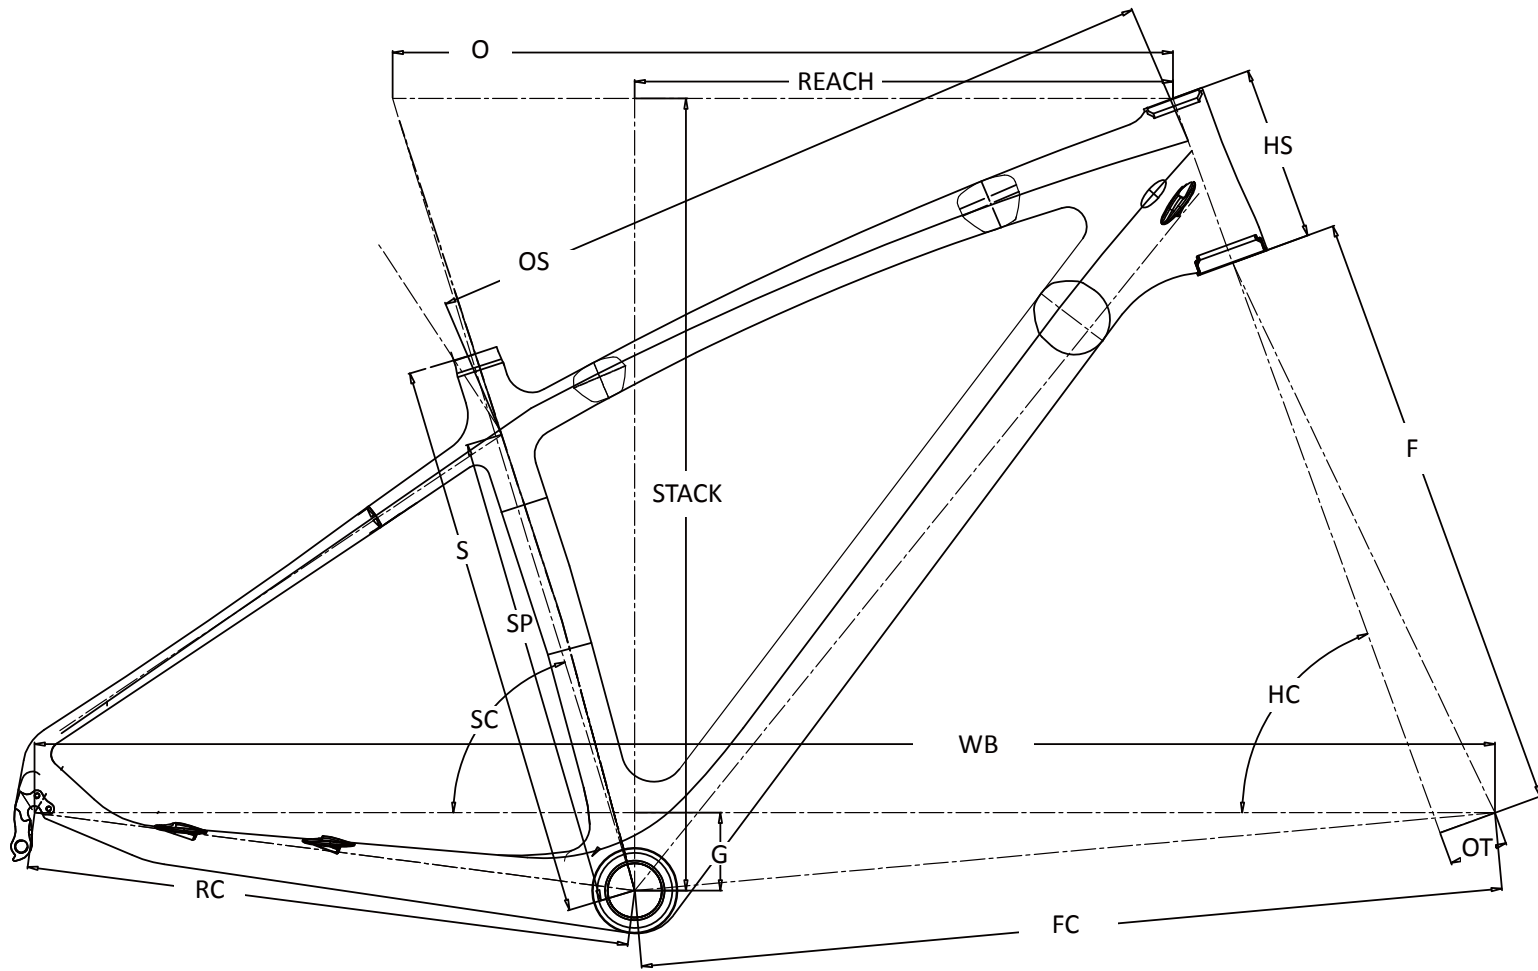


ARTIC (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
15"	381	316	67.5°	583	562.1	115	69.5°	468	45	1112	651.6	467	60	401.9	590.3
17"	432	366.4	67.5°	602	576.4	135	70°	468	45	1126.8	666.4	467	60	415.2	611.2
19"	483	416.5	67.5°	622	597	155	70°	468	45	1148	687.5	467	60	429.5	630
21"	533	466	67.5°	640	611.6	175	70°	468	45	1167	706.4	467	60	441.6	648.8

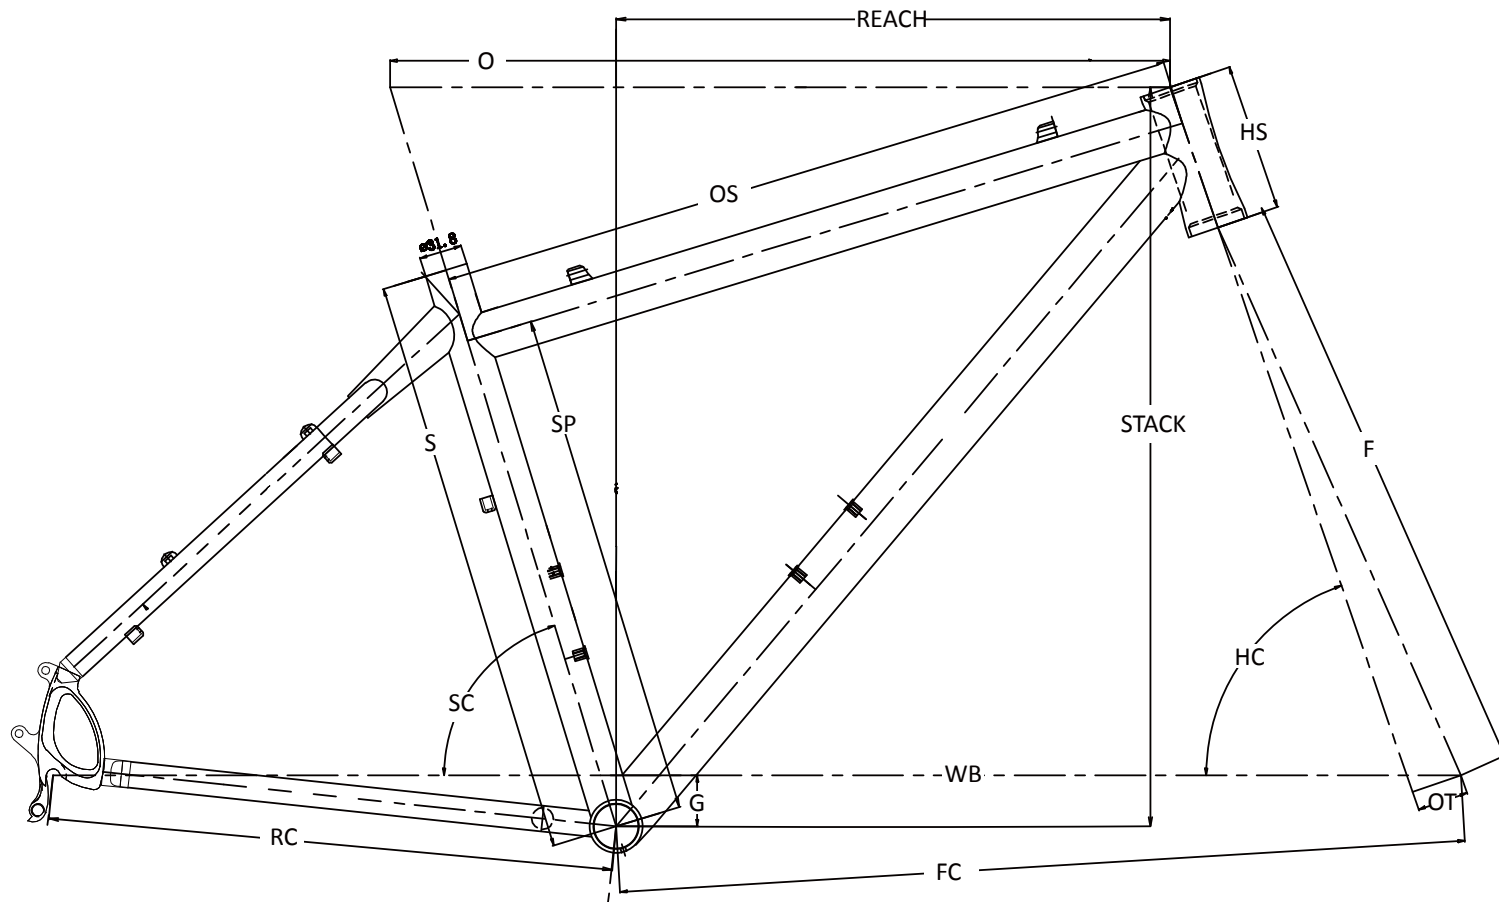


TALLYHO (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
15"	381	326	73°	538.6	520	110	71°	445	38	1005.1	588.1	420	38	370.8	548.9
17"	432	377	73°	579	554.7	110	71°	445	38	1045.5	628.4	420	38	411.2	548.9
19"	483	428	73°	598	576	110	71°	445	38	1064.5	647.4	420	38	430.2	548.9
21"	533	478	73°	608.3	591.3	125	71°	445	38	1075.3	658.2	420	38	436.1	563.1

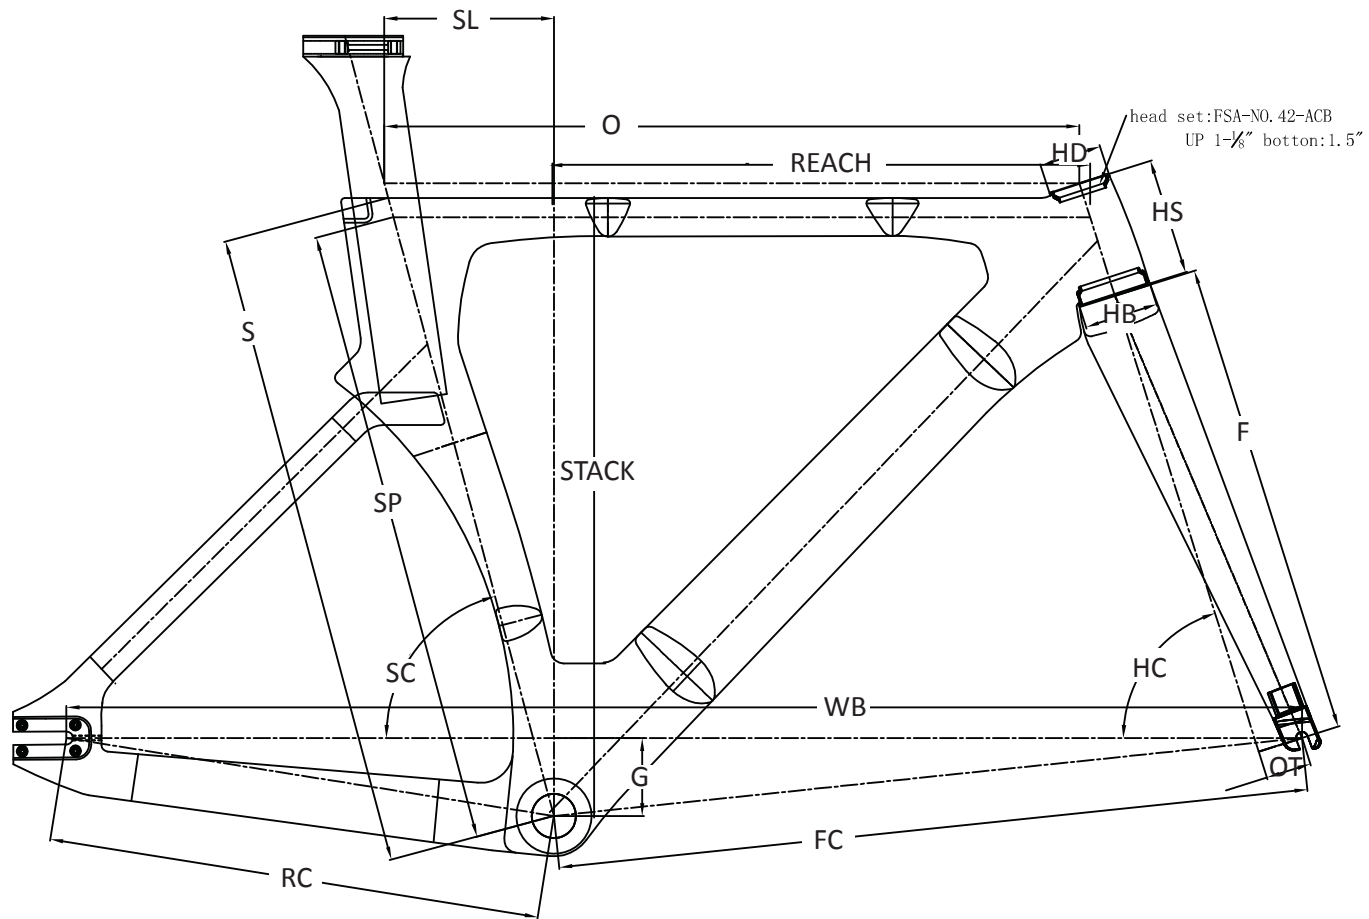


STINGER (Length: mm/ Angle: °)

SIZE	S	SP	SC	SL	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK	HD	HB
450	450	468.5	75°	121.5	505	80	72.5°	368	35	921.3	551.1	375	46	380.8	463.6	48	57
490	478	473	75°	122	516	85	72.5°	368	35	932	560	375	50	387	461.5	48	57
510	482.3	477.5	75°	123.5	535	90	72.5°	368	35	951	579	375	50	405	477	48	57
540	497.8	492	75°	127	557	105	72.5°	368	35	974	601.5	375	50	422.5	491.5	48	57
560	529.3	512	75°	132.5	573	125	72.5°	368	35	991	618	375	50	433.5	499	48	57

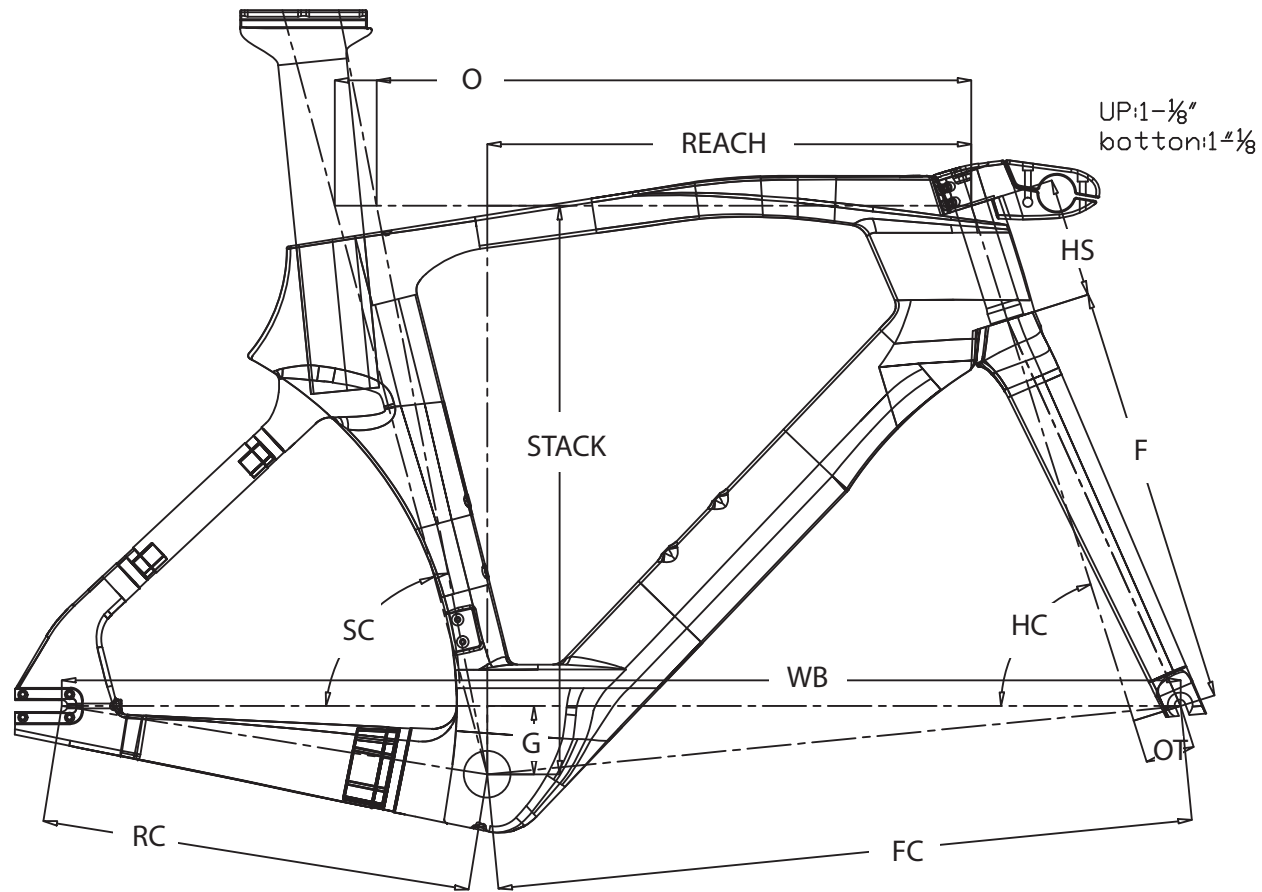


STINGER EV (Length: mm/ Angle: °)

SIZE	O(SC:75°)	O(SC:79°)	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
510	544.6	508.6	95	72.5°	368	43	966	596.9	377	60	413.6	488.6
540	557.5	520.9	105	72.5°	368	43	979.8	610.3	377	60	424	498.2
560	581.6	543.2	130	72.5°	368	43	1004.7	635.3	377	60	441.7	522
580	598.6	559.1	145	72.5°	368	43	1022.4	652.9	377	60	454.9	536.3

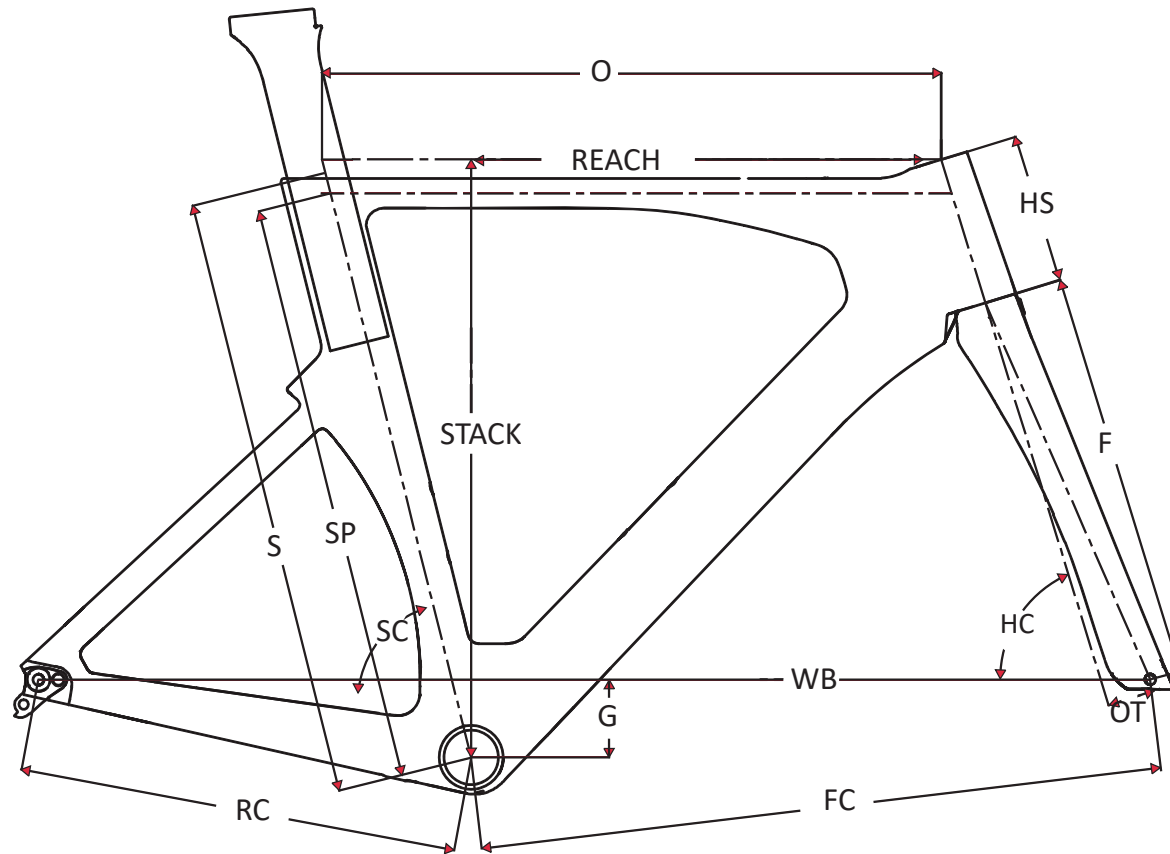


SPRINT DISC (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
450	450	435	75°	490	91	71°	370	45	945	562	395	75	372	453
490	530	500	75°	511	101	72.5°	370	45	945	563	395	75	378	512
520	540	510	75°	531	111	72.5°	370	45	967	584	395	75	396	521
540	557	527	75°	550	129	72.5°	370	45	986	603	395	75	410	538
560	576	546	75°	569	148	72.5°	370	45	1006	622	395	75	424	556

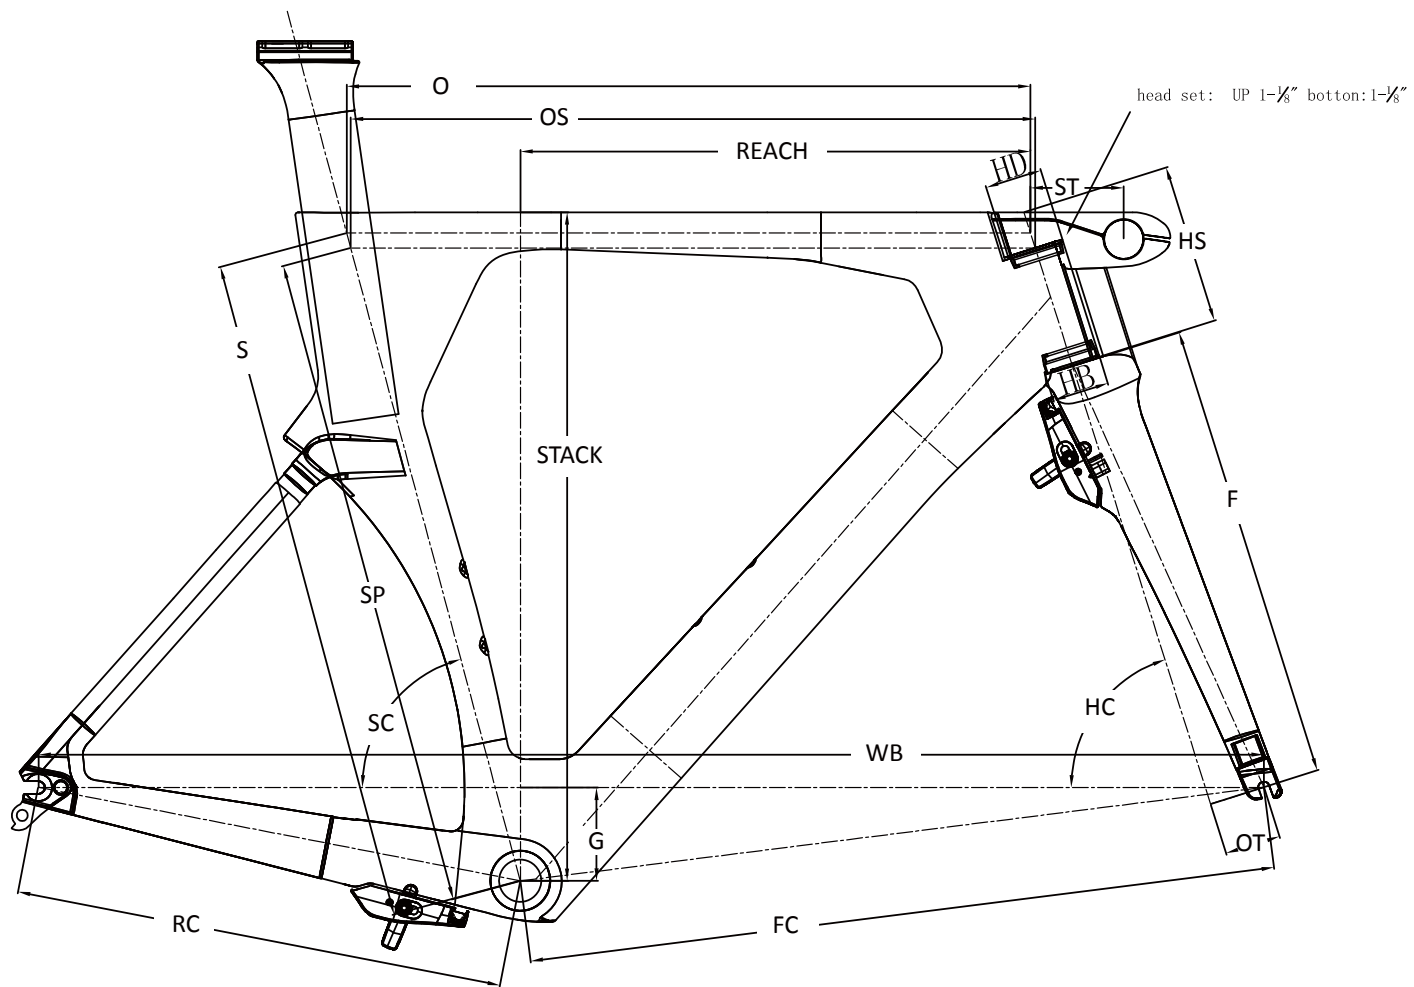


SPRINT-2 (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack	HD	HB	ST
450	450	435	75°	490	488	91.5	71°	370	45	945.5	562.5	395	75	372.5	453.5	46	46	75
490	515	500	75°	511	511.5	101.5	72.5°	370	45	945.5	562.8	395	75	378	512	46	46	75
520	525	510	75°	531.5	532	111.5	72.5°	370	45	967	584	395	75	396	521.5	46	46	75
540	542	527	75°	550.5	551	129.5	72.5°	370	45	986.5	603.5	395	75	410	538	46	46	75
560	561	546	75°	569	569.5	148	72.5°	370	45	1006	622.5	395	75	424	556	46	46	75

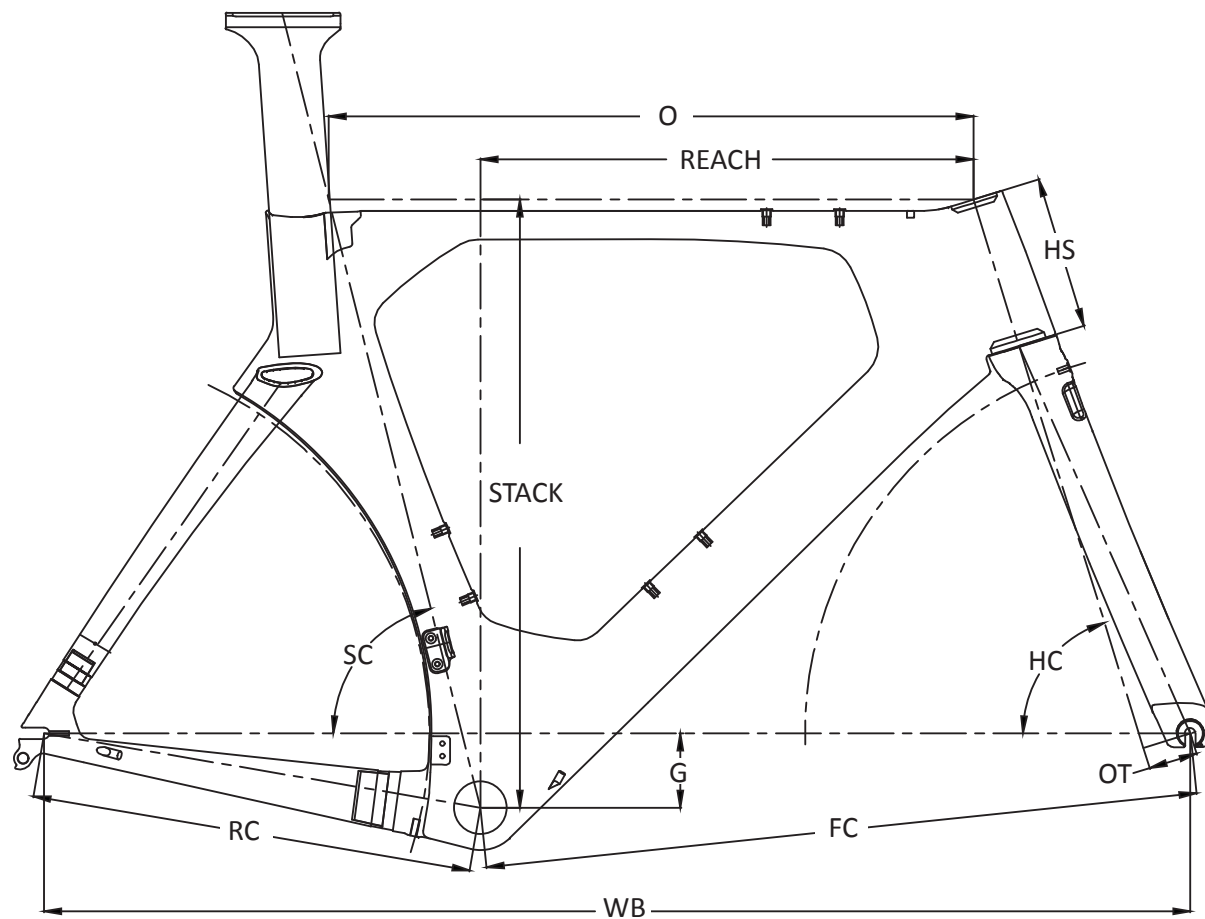


SPRINT EV (Length: mm/ Angle: °)

SIZE	O(SC:76°)	O(SC:78°)	HS	HC	OT	WB	FC	RC	G	REACH	STACK
480	492	474	80	72.5°	43	929	552	387	65	372	479
500	519	501	80	72.8°	43	954	576	387	65	399	480
520	542	523	107	72.8°	43	978	600	387	65	415	506
540	565	544	134	72.8°	43	1002	624	387	65	431	532
560	587	566	161.4	72.8°	43	1027	648	387	65	447	558

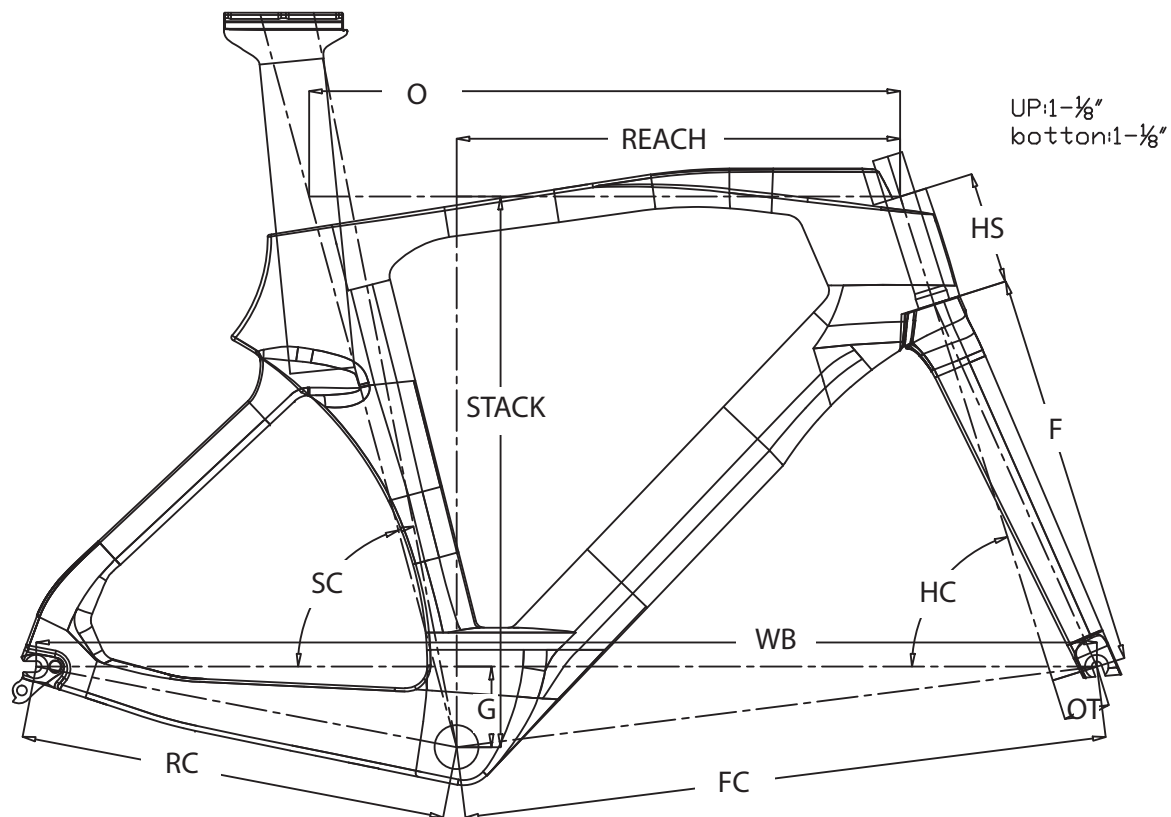


ROSETTA (Length: mm/ Angle: °)

SIZE	O(SC75°)	O(SC79°)	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
510	533	495.9	95	72.5°	368	43	970.2	583.1	399	75	398	503.6
540	551	513.2	105	72.5°	368	43	988.6	601.4	399	75	413.5	513.2
560	570	530.5	130	72.5°	368	43	1008.8	621.4	399	75	426.1	537
580	587	546.4	145	72.5°	368	43	1026.4	639	399	75	439.3	551.3

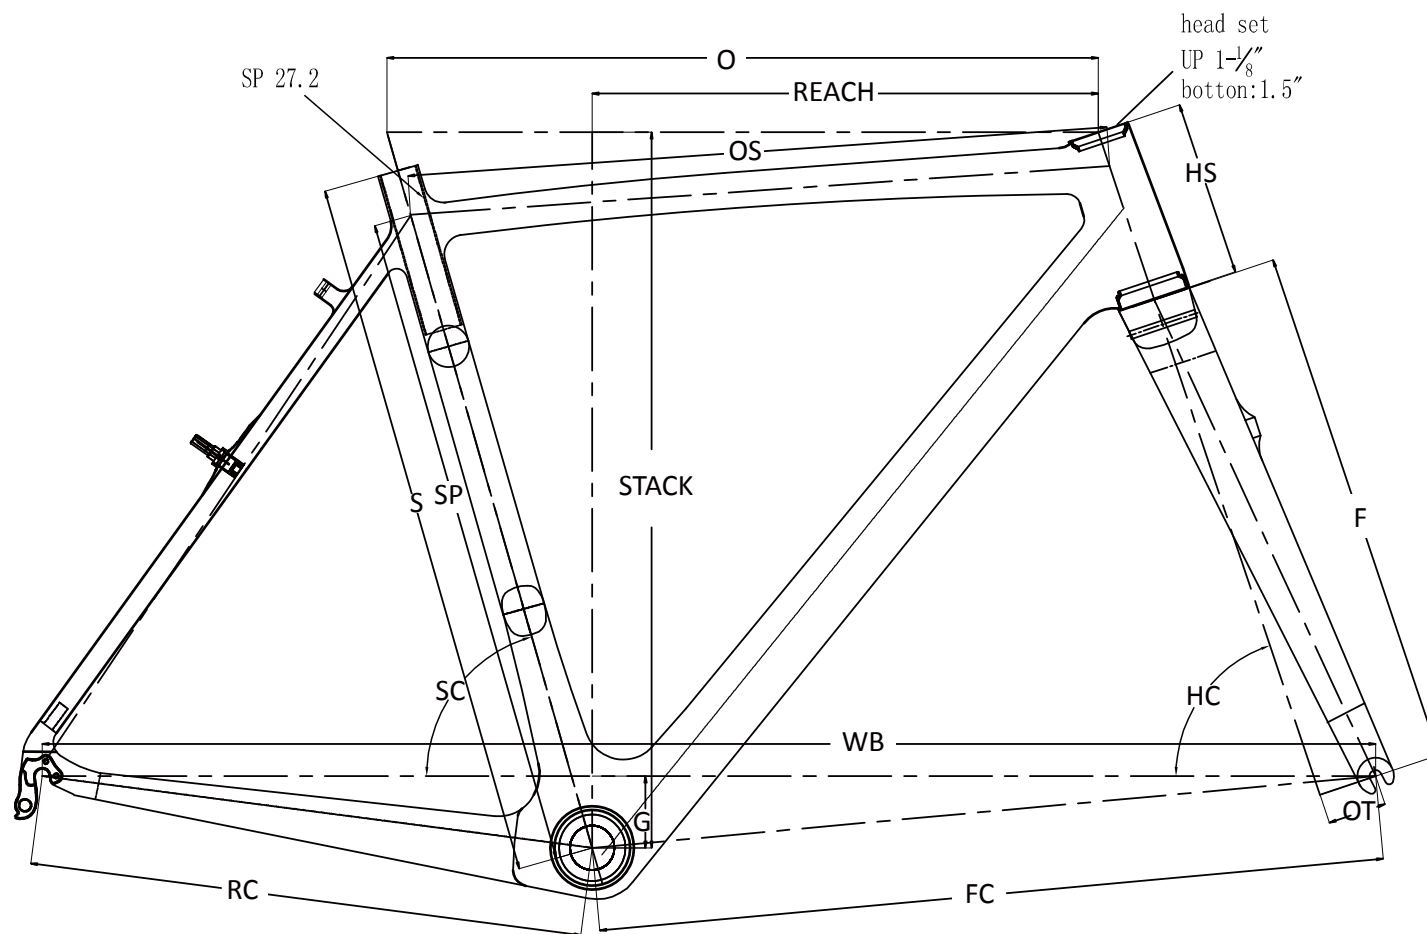


CCX PRO (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
480	480	445	75.5°	510	501.4	100	70.5°	400	45	1009.4	590	425	53	378	510
500	500	465	75°	525	516.3	115	70.5°	400	45	1020.8	601.5	425	53	384.5	524
520	520	485	74.5°	535	526.2	125	71°	400	45	1021.1	602.2	425	55	386	537.5
540	540	505	74°	545	536.8	135	71.5°	400	45	1021.7	602.8	425	55	387.5	548.5
560	560	525	73.5°	560	552.2	145	72°	400	45	1026.6	607.6	425	57	393.5	562.5
580	580	545	73°	575	566.8	160	72.5°	400	45	1030.9	612.4	425	57	398	578.5

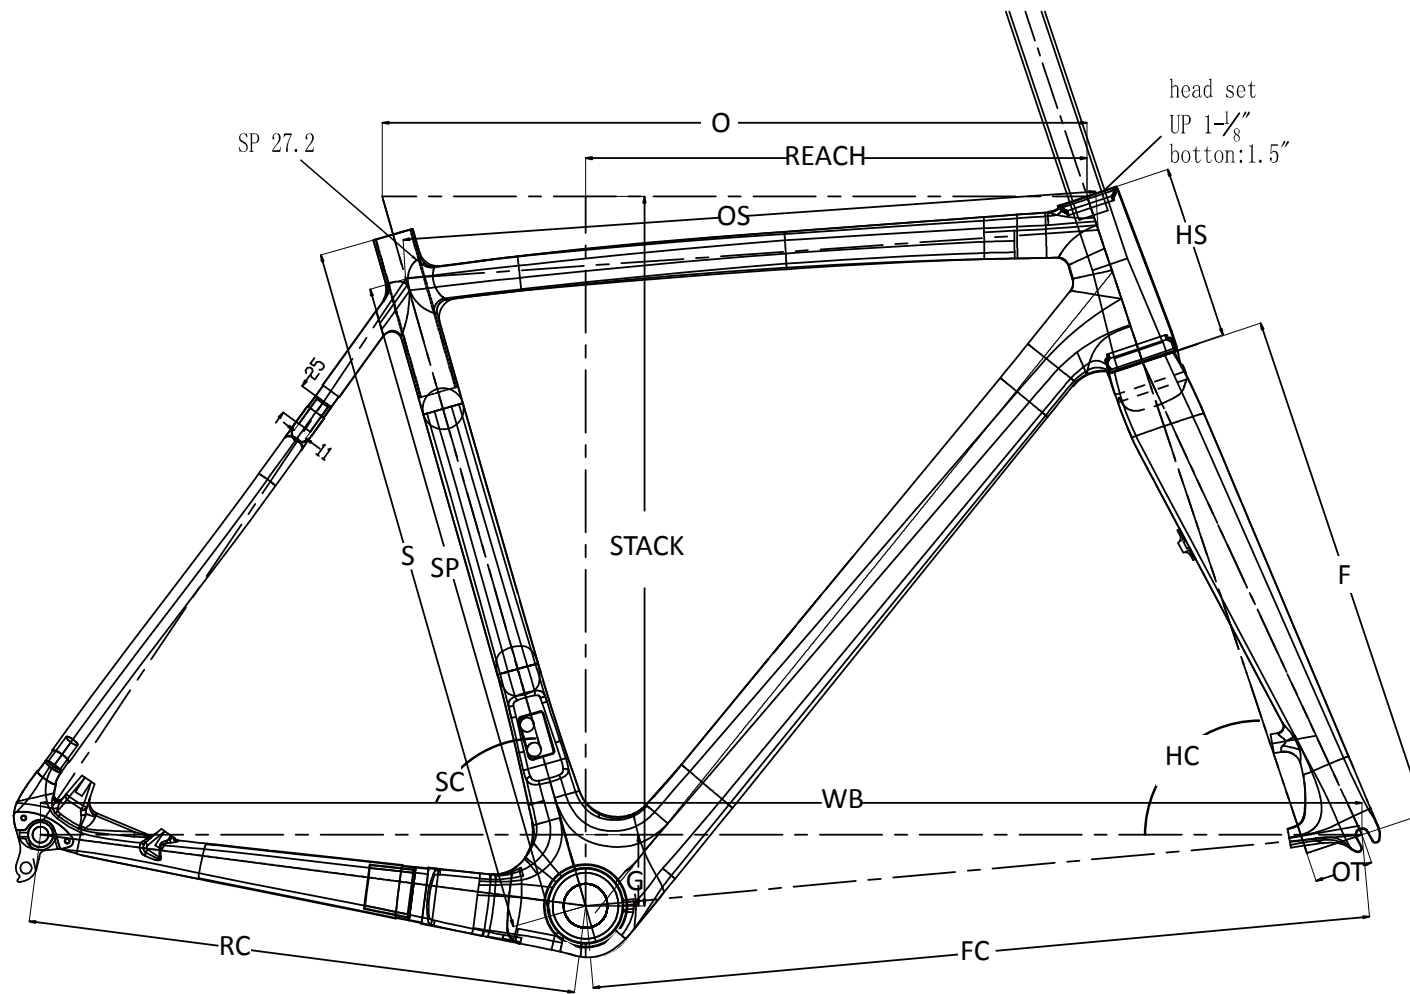

CCX PRO D (Length: mm/ Angle: °)


SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
480	480	445	75.5°	510	501.4	100	70.5°	400	45	1009.4	590	425	53	378	510
500	500	465	75°	525	516.3	115	70.5°	400	45	1020.8	601.5	425	53	384.5	524
520	520	485	74.5°	535	526.2	125	71°	400	45	1021.1	602.2	425	55	386	537.5
540	540	505	74°	545	536.8	135	71.5°	400	45	1021.7	602.8	425	55	387.5	548.5
560	560	525	73.5°	560	552.2	145	72°	400	45	1026.6	607.6	425	57	393.5	562.5
580	580	545	73°	575	566.8	160	72.5°	400	45	1030.9	612.4	425	57	398	578.5

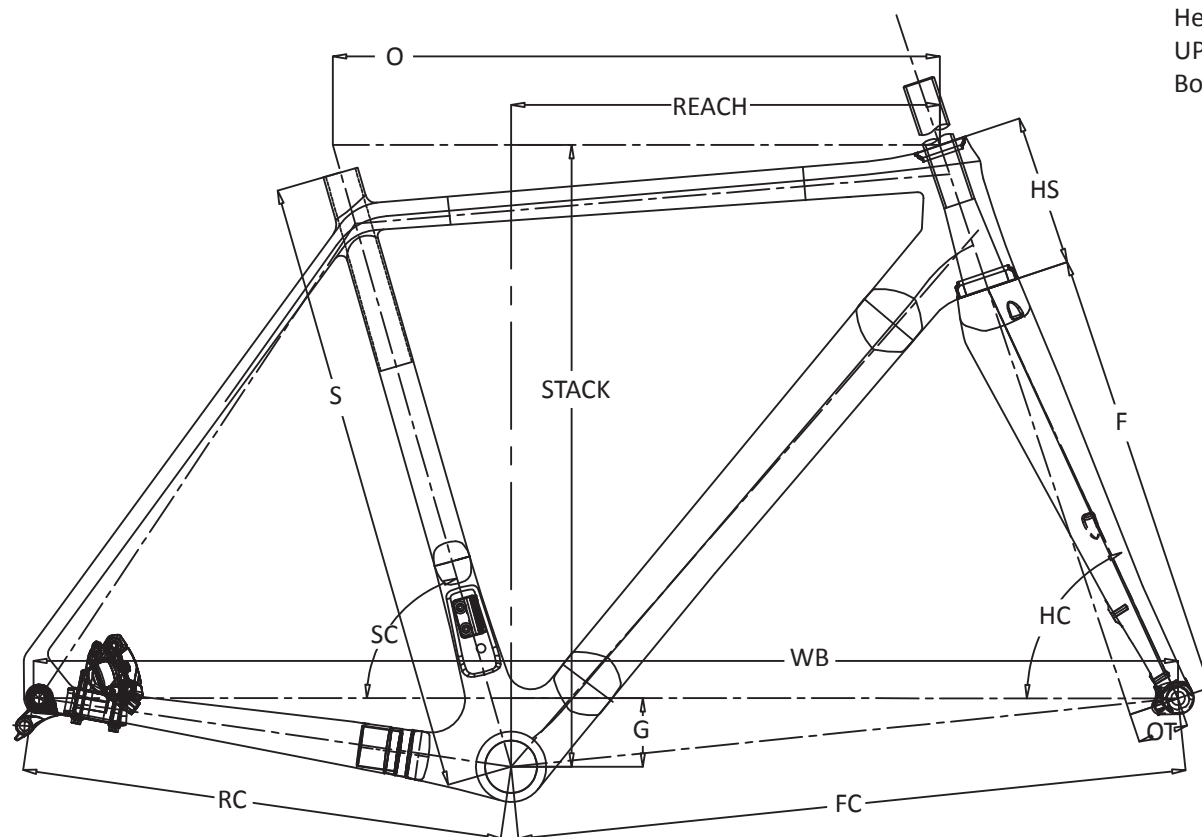

Head set: FSA-No. 42ACB
UP: 1-1/8"
Bottom: 1.5"


CCX EV (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
500	510	75.5°	509	100	70.5°	400	45	1005.2	587.8	425	61	375	518.2
520	530	74.5°	527	110	71°	400	45	1009.5	592	425	61	380	529.5
540	551	74°	541	135	71.5°	400	45	1020	597.7	425	61	382	554
560	570	73°	559	145	72°	400	45	1018.1	600.6	425	61	386	566.4
580	590	73°	568.5	160	72°	400	45	1027.6	610	425	61	391	580.6
600	610	73°	582.2	185	72°	400	45	1042.5	629.4	425	61	398	604.4

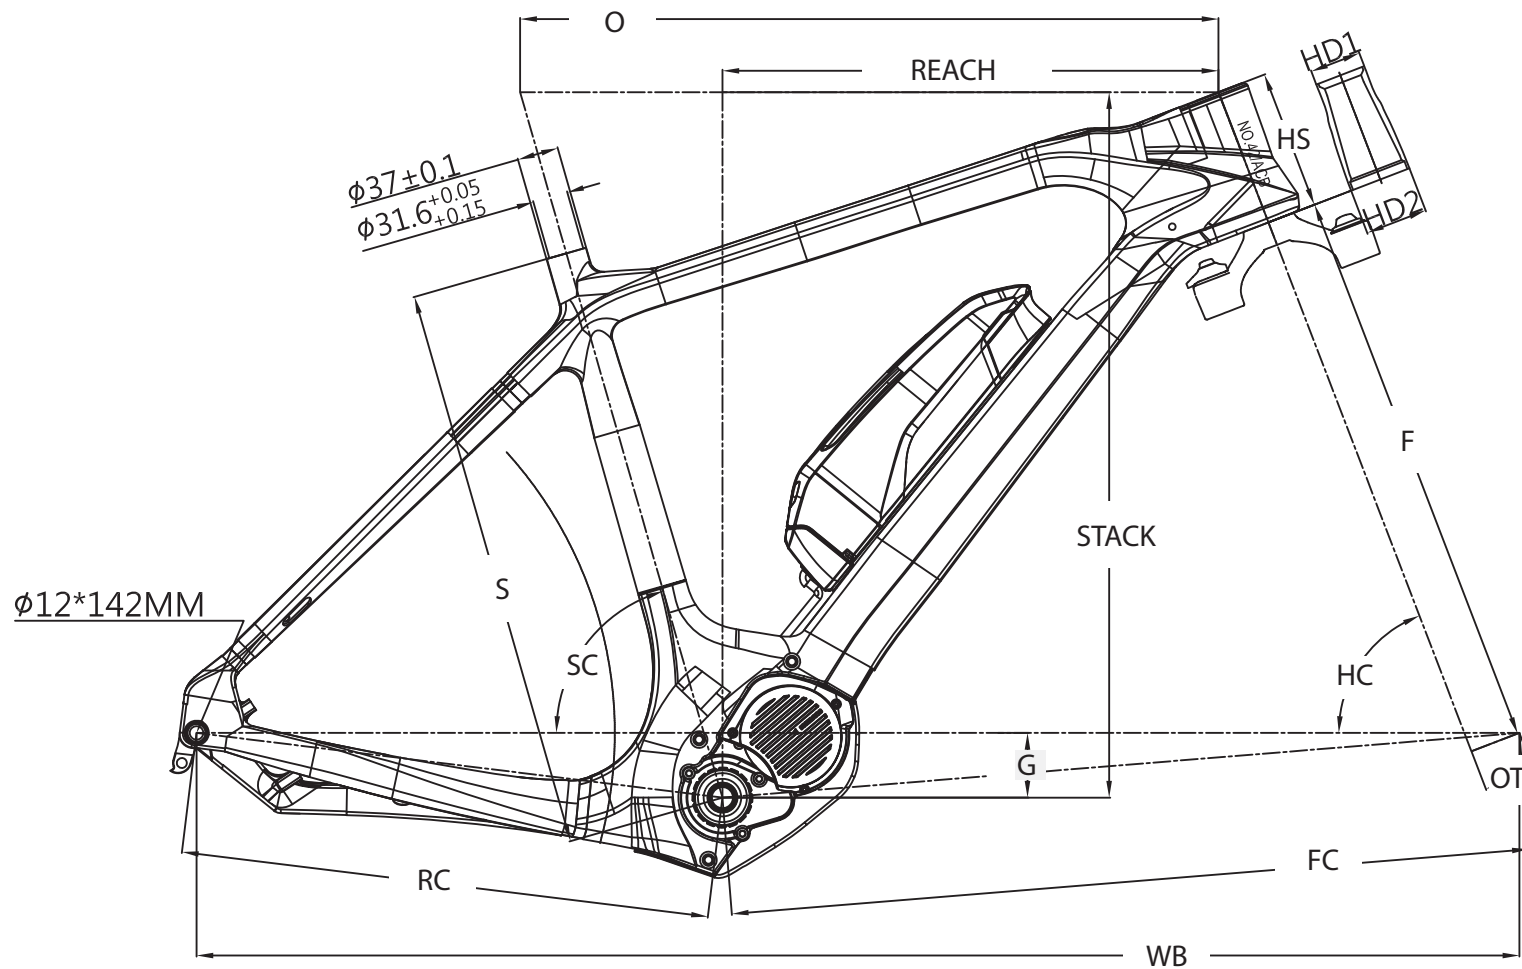


PINNACLE 29ER (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK	HD1	HD2
16"	408	74°	575	105	69°	508	46	1133	664	475	58	399	613.7	Ø48	Ø60
18"	458	74°	599	115	69°	508	46	1158	689	475	58	420	623	Ø48	Ø60
20"	508	74°	626	125	69°	508	46	1185	717	475	58	444.7	632	Ø48	Ø60

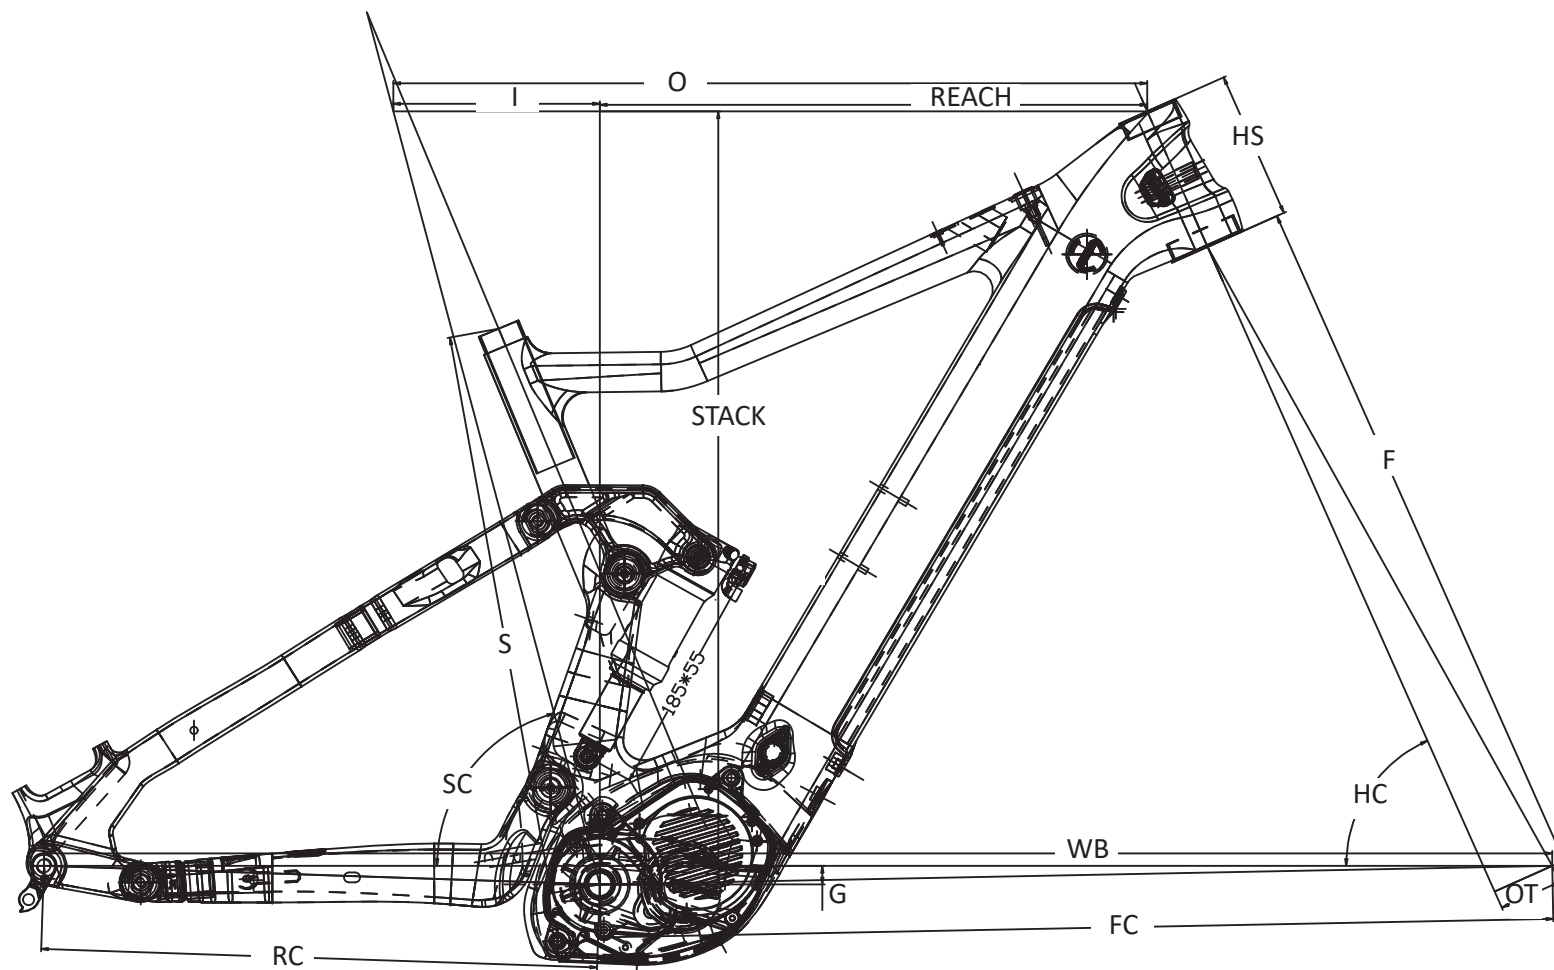


E PYRENEES PLUS 160 (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	I	REACH	STACK	Travel	Shock Eye to Eye
16"	406	75°	590	110	66°	571	51	1102	748	450	15	161.5	433.2	614.4	160	185
18"	457	75°	601	120	66°	571	51	1220	770.7	450	15	167.1	442.9	625.5	160	185
20"	508	75°	630	130	66°	571	51	1240	790.4	450	15	170.6	462.5	632.7	160	185

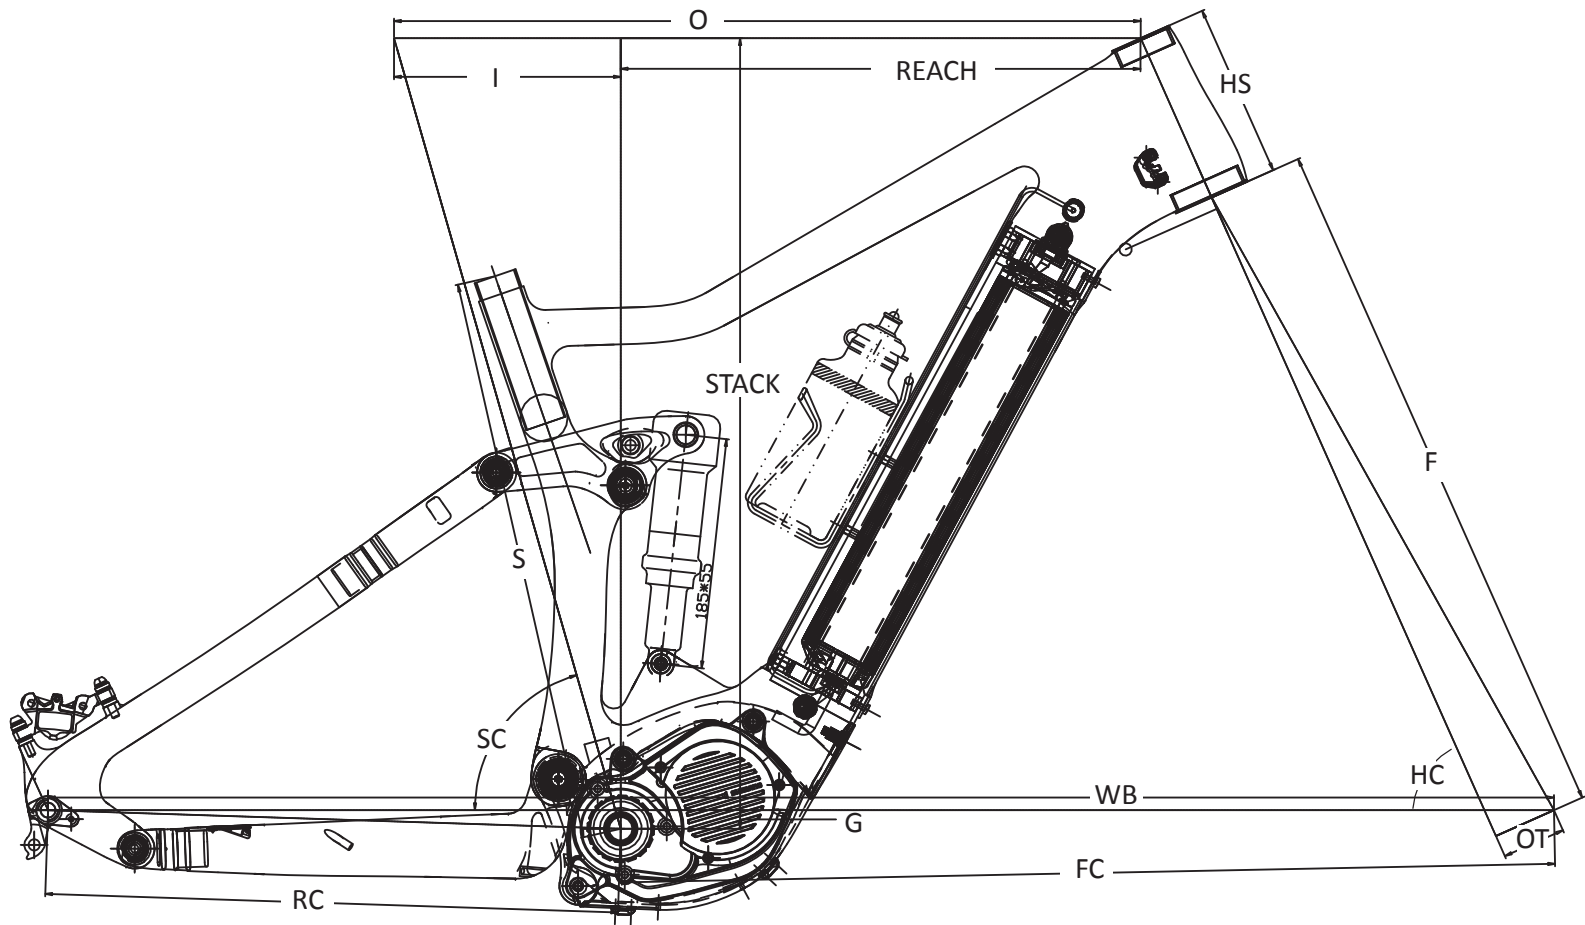

E PYRENEES PLUS (Length: mm/ Angle: °)


SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	I	REACH	STACK	Travel	Shock Eye to Eye
16"	406	74°	590	130	66°	561	51	1201.6	737	460	15	176.5	418.2	626.4	150	185
18"	457	74°	610	140	66°	561	51	1219.6	759.3	460	15	182	427.9	637.7	150	185
20"	508	74°	630	150	66°	561	51	1239	779.4	460	15	185.6	447.5	644.7	150	185

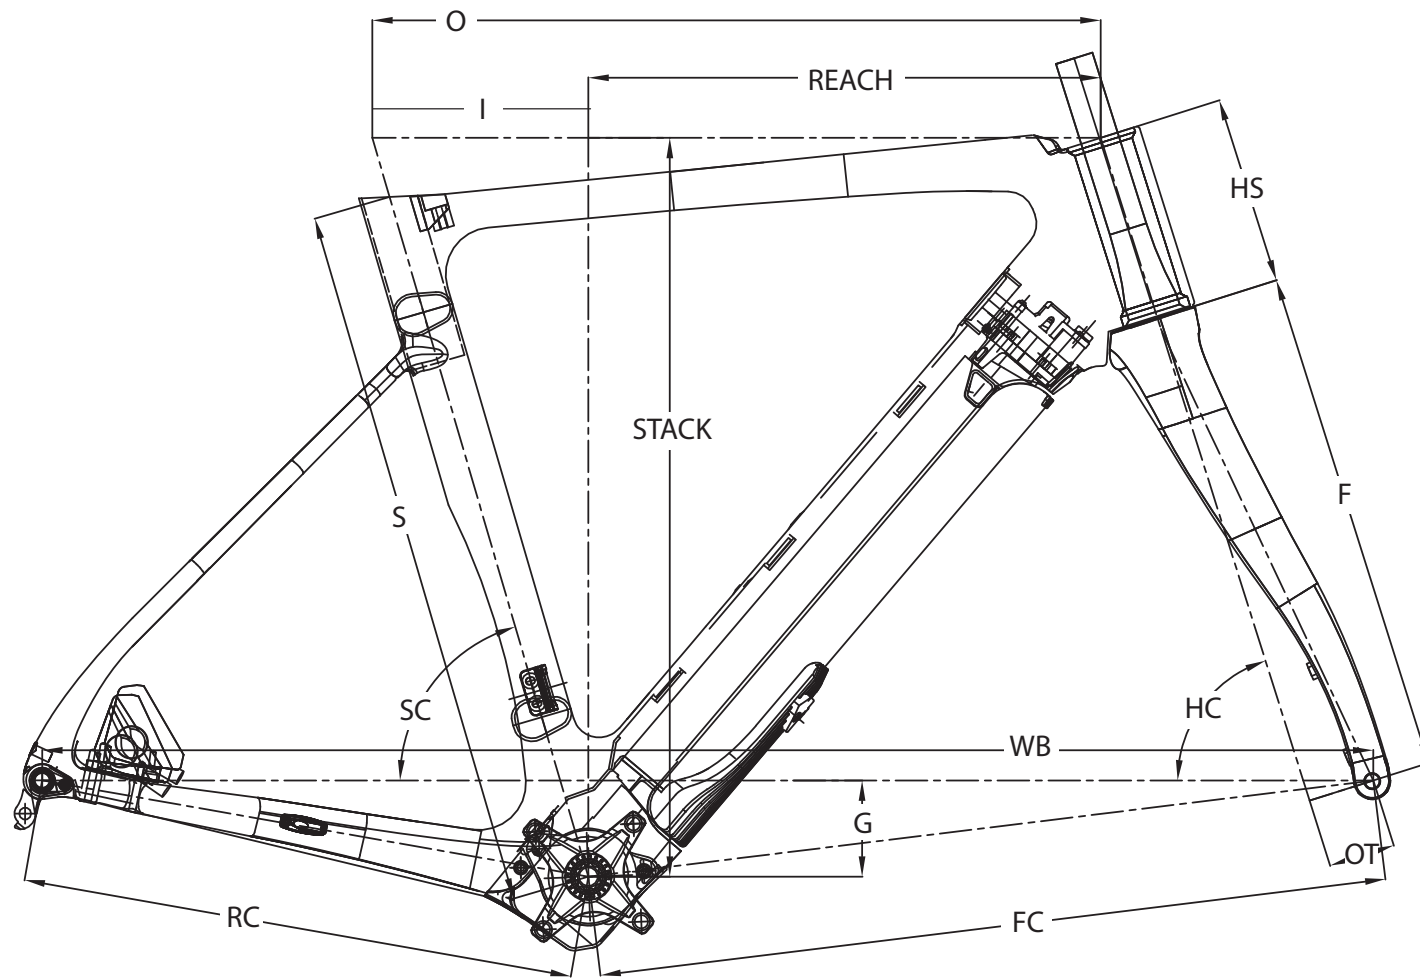

Steerer size: 1 1/2"
 Steerer length: 300mm
 Offset: 50mm
 O.L.D: TA 100mm


AEOLUS (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	I	REACH	STACK
470	470	74.5°	520	130	71.5°	380	50	982.8	582	415	72	138	370	531
500	500	74°	525	130	72°	380	50	982.8	582	415	72	138	370	530
530	530	73.7°	545	140	72.5°	380	50	996.1	596	415	72	161.7	382	553
550	550	73°	560	160	73°	380	50	1001.8	605	415	72	156.9	389	572
580	580	72.5°	590	180	73.5°	380	50	1009.8	620	415	72	174.4	397	615

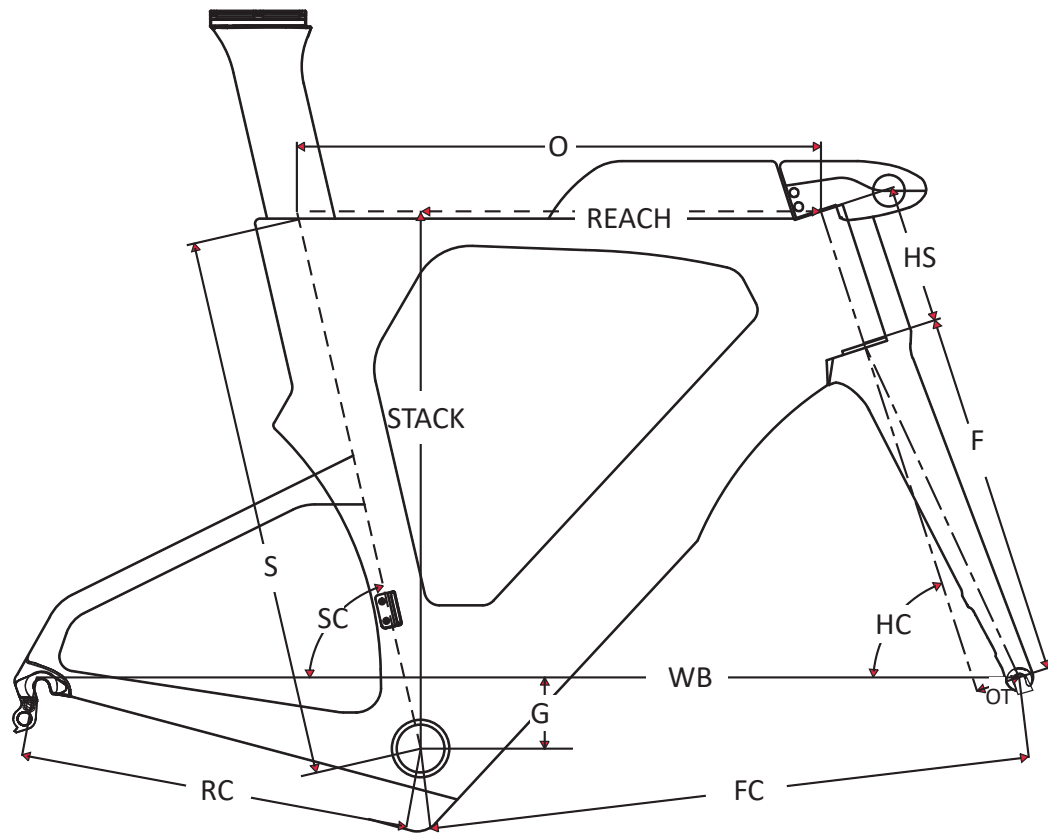

TRIDENT DISC (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
505	505	77°	480	100	70.3°	370	45	954	570	395	72	365	499
525	525	77°	505	115	71.5°	370	45	970	586	395	72	385	518
549	549	77°	530	140	72°	370	45	993	609	395	72	405	543
577	577	77°	560	165	72.5°	370	45	1021	636	395	72	429	569
600	600	77°	585	190	72.5°	370	45	1048	663	395	72	448	592

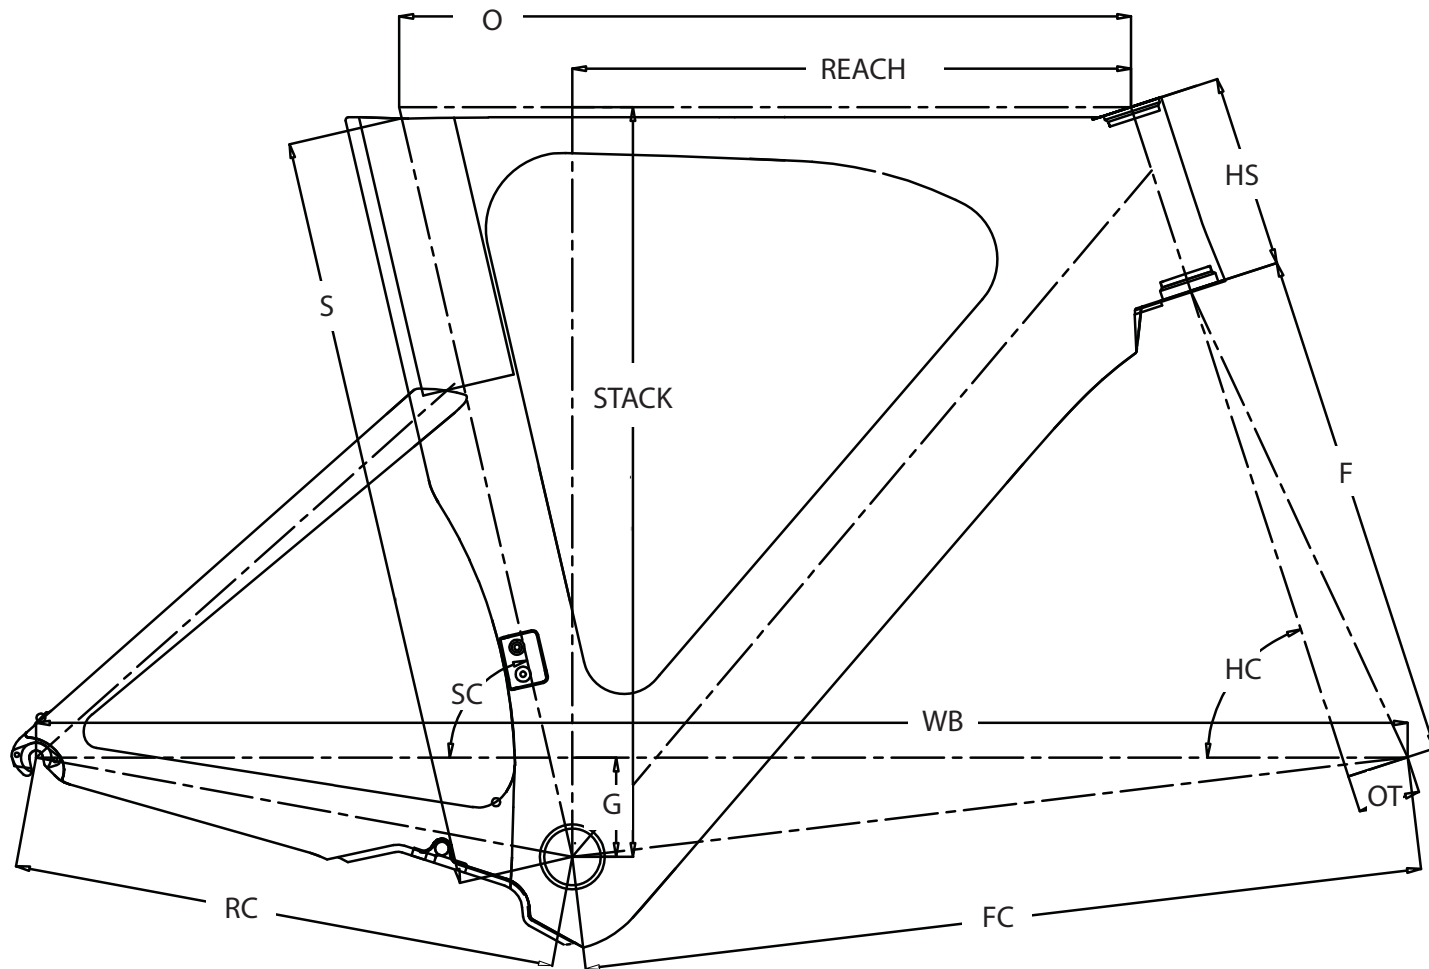

TRIDENT (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
505	505	77°	480	100	70.3°	370	45	954.3	570.5	395	72	364.8	499.2
525	525	77°	505	115	71.5°	370	45	970.4	586.5	395	72	385.5	517.7
549	549	77°	530	140	72°	370	45	993.3	609.2	395	72	404.6	543.1
577	577	77°	560	165	72.5°	370	45	1020.8	636.5	395	72	428.7	568.7
600	600	77°	585	190	72.5°	370	45	1048	663.5	395	72	448	592.6

Legends:

S	Seat tube length
SP	Seat tube center to center length
SC	Seat tube angle
O	Horizontal (effective) top tube length
OS	Actual top tube length
HS	Head tube length
HC	Head tube angle
F	Fork length from crown
OT	Fork offset (rake)
WB	Wheelbase
FC	Fork axle to BB center
RC	Chain stay length
G	BB drop