



EDGE

PROFESSIONAL CYCLING COMPONENTS



MARUDEAN CO., LTD.

No.25-4, Longshe Rd., Longjing Dist.,
Taichung City 43452, Taiwan (R.O.C.)

TEL:886-4-26318826

FAX:886-4-26316201

EMAIL:

terry@marudean.com.tw

support@marudean.com.tw

WEBSITE:www.edge-design.com.tw

EXILE

SPECIFICATION

FEATURE : CARBON FIBER GRAVEL ROAD FRAME

BRAKE : FLAT MOUNT DISC BRAKE

HEAD SET : 1.5" (FSA NO55R)

FORK CROWN : 36° LOWER PRESSER

MAX TIRE : 700C * 45mm

SEAT POST : 27.2mm


SEAT CLAMP : 31.8mm

BB: BB86

SIZE : XS / S / M / L

FRAME WEIGHT : 1085g +/- 35g (SIZE : M)

EDGE

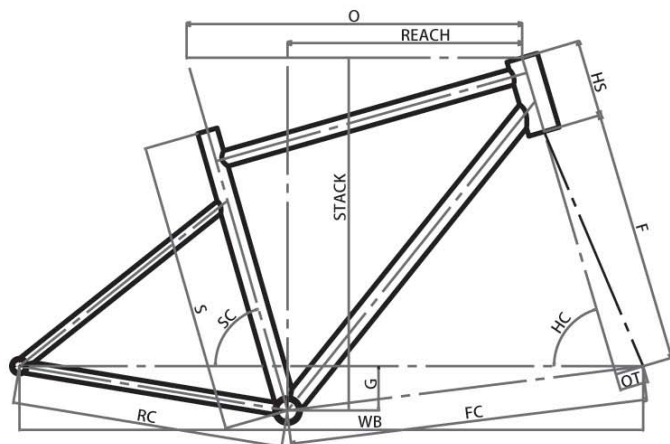

Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
XS	460	73.5°	531	122	71°	400	45	1009.9	589.8	430	71	369	547
S	510	73.5°	543	138	71°	400	45	1022.8	602.6	430	71	376.5	562.1
M	554	73.5°	555	156	71°	400	45	1036.5	615.8	430	71	384	576.9
L	590	73.5°	570	182	71°	400	45	1053.1	632.2	430	71	391.8	601.6

GRAVEL

GVX 2.0

SPECIFICATION

FEATURE : CARBON FIBER GRAVEL ROAD FRAME

BRAKE : FLAT MOUNT DISC BRAKE

HEAD SET : 1.5" (FSA NO55R)

FORK CROWN : 36° LOWER PRESSER

MAX TIRE : 700C * 45mm

SEAT POST : 27.2mm

SEAT CLAMP : 31.8mm

BB : T4786

HANGER : SRAM UDH


SIZE : XS / S / M / L / XL

FRAME WEIGHT : 1085g +/- 35g (SIZE : M)



Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
XS	460	74.5°	520	100	71°	402	52	1003	590	435	76	372	534
S	480	74°	540	115	71.5°	402	52	1014	600	435	76	382	550
M	510	73.5°	555	130	72°	402	52	1019	606	435	76	387	566
L	535	73°	570	150	72°	402	52	1029	615	435	76	390	585
XL	560	73°	590	180	72°	402	52	1050	636	435	76	402	613

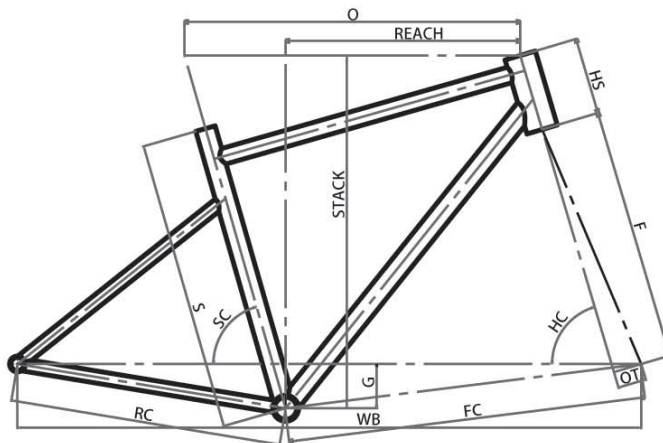

EDGE

GRAVEL X

SPECIFICATION

FEATURE : CARBON FIBER GRAVEL ROAD FRAME

BRAKE : FLAT MOUNT DISC BRAKE

HEAD SET : 1.5" (FSA NO55R)

FORK CROWN : STANDARD LOWER PRESSER

MAX TIRE : 700C * 45mm / 700C * 50 mm


SEAT POST : 27.2mm

BB : BB86

SIZE : XS / S / M / L / XL

FRAME WEIGHT: 1085g +/- 35g (SIZE : M)

EDGE

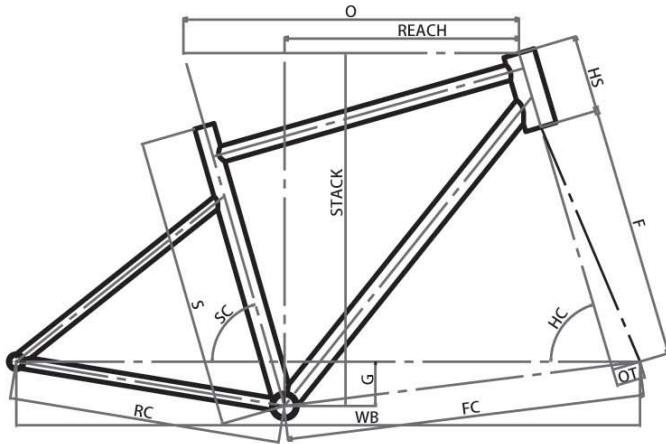

Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
XS	460	74.5°	525	120	70°	400	50	1024	603	430	69	374	541
S	490	74°	540	140	71°	400	50	1026	606	430	69	378	564
M	510	73.5°	555	165	71.5°	400	50	1032	611	430	69	381	589
L	530	73.5°	570	185	71.5°	400	50	1047	627	430	69	390	608
XL	560	73°	590	205	72°	400	50	1056	636	430	69	397	629

GRAVEL

CX



Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
XS	440	75°	510	105	70°	395	50	1012.3	592.2	430	70	369.7	523
S	460	74.5°	525	110	70.5°	395	50	1018.2	598.1	430	70	377	530
M	480	73.5°	545	130	71°	395	50	1025.5	604.7	430	68	382.4	549
L	500	73°	565	150	72°	395	50	1031	610.3	430	68	390.2	571
XL	520	72.5°	575	180	72.5°	395	50	1030.6	609.8	430	68	385	602

CX56

SPECIFICATION

FEATURE : CARBON FIBER CX ROAD FRAME

BRAKE : FLAT MOUNT DISC BRAKE

HEAD SET : 1.5" (FSA NO55R)

FORK CROWN : STANDARD LOWER PRESSER


MAX TIRE : 700C * 41mm

SEAT POST : 27.2mm

BB: BB86

SIZE : XS / S / M / L / XL

FRAME WEIGHT: 1080g +/- 30g (SIZE : M)

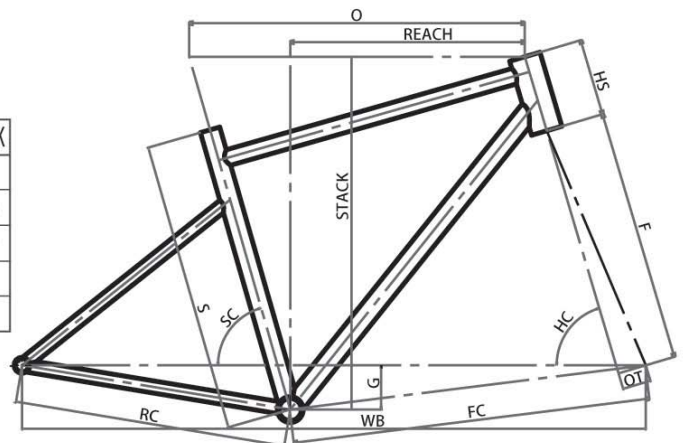

EDGE

AWOL 2.0

SPECIFICATION

FEATURE : CARBON FIBER AERO ROAD FRAME

BRAKE: FLAT MOUNT DISC BRAKE

HEAD SET : 1.5" (FSA NO55R)

FORK CROWN : 36° LOWER PRESSER

MAX TIRE : 700C * 32mm

SEAT POST : AERO

SADDLE CLAMP : 7 * 7mm 7 * 9 mm


BB: BB86

HANGER : SRAM UDH

SIZE : XS / S / M / L / XL

FRAME WEIGHT : 1135g+/- 30g (SIZE : M)

EDGE

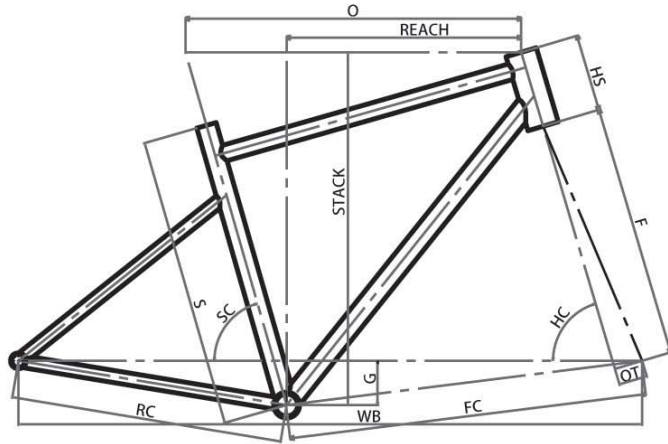

Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
XS	450	75°	512	105	71.5°	376	46	975	578	408	72	378	512
S	480	74.5°	528	120	72°	376	46	980	583	408	72	382	528
M	510	74°	542	135	72°	376	46	990	592	408	70	387	540
L	535	73.5°	565	155	72.5°	376	46	1006	606	408	70	399	561
XL	560	73°	585	180	72.5°	376	46	1021	621	408	70	406	585

AERO



AEOLUS

SPECIFICATION

FEATURE : CARBON FIBER AERO ROAD FRAME

BRAKE: FLAT MOUNT DISC BRAKE

HEAD SET : 1.5" (FSA NO55R, WITH AERO TOP CAP)

FORK CROWN : 36° LOWER PRESSER

MAX TIRE : 700C * 28mm

SEAT POST : AERO

SADDLE CLAMP : 7 * 7mm 7 * 9 mm


BB: BB86

SIZE : XS / S / M / L / XL

FRAME WEIGHT : 1135g +/- 30g (SIZE : M)

Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
XS	430	74°	520	105	71°	370	45	974	577	406	65	376	500
S	460	74°	535	115	72.5°	370	45	977	580	406	65	388	514
M	500	74°	553	145	73°	370	45	991	594	406	65	397	544
L	540	74°	569	165	73°	370	45	1007	610	406	65	407	564
XL	570	74°	585	180	73°	370	45	1024	627	406	65	420	578

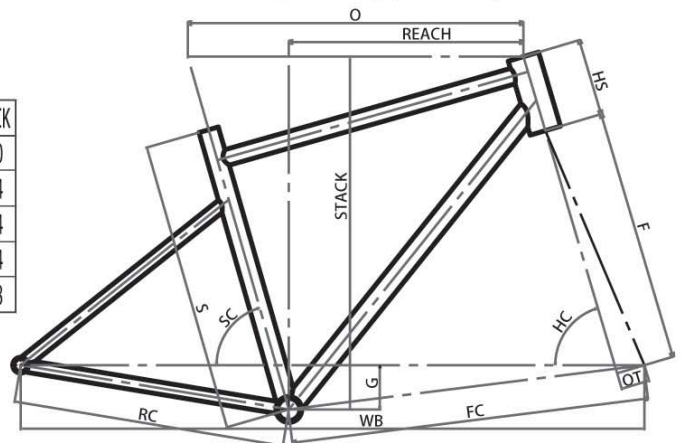

EDGE

AIRY SPY

SPECIFICATION

FEATURE : CARBON FIBER SL ROAD FRAME

BRAKE: FLAT MOUNT DISC BRAKE

HEAD SET : 1.5" (FSA NO55R)

FORK CROWN : 36° LOWER PRESSER

MAX TIRE : 700C * 28mm


SEAT POST : 27 . 2mm

SEAT CLAMP : 31. 8mm

BB: BB86

SIZE : XXS / XS / S / M / L / XL / XXL

FRAME WEIGHT: 818g +/- 30g (SIZE : M)

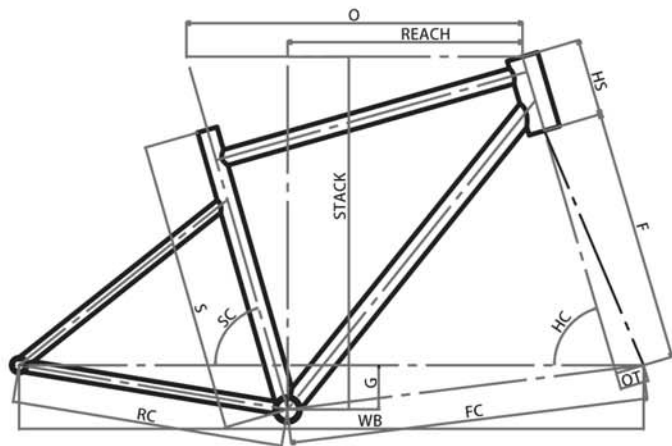

Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
XXS	480	74.7°	510	110	71.5°	368	48	971.4	572.3	410	72	370.3	510.9
XS	500	74.4°	522	115	72°	368	48	975.4	577.3	410	72	377.6	517.5
S	520	74.1°	534	125	72.6°	368	48	978.7	578.7	410	69	383.9	526.8
M	540	73.8°	547	140	72.9°	368	48	986.3	586.2	410	69	389.5	542.2
L	560	73.5°	561	155	73.1°	368	48	994.1	594	410	69	394.6	557.3
XL	580	73.2°	575	175	73.2°	368	48	1005.3	605.1	410	69	400.9	576.7
XXL	600	72.9°	591	195	73.3°	368	48	1016.9	616.6	410	69	407.6	596.2

ROAD

ANLACE ONE

SPECIFICATION

FEATURE : CARBON FIBER ENTRY ROAD FRAME

BRAKE: FLAT MOUNT DISC BRAKE

HEAD SET : 1.5" (FSA NO55R)

FORK CROWN : 45° LOWER PRESSER

MAX TIRE : 700C * 30mm

SEAT POST : 27 . 2mm

SEAT CLAMP : 31. 8mm

BB: BB86


SIZE : XS / S / M / L / XL

FRAME WEIGHT : 990g +/- 30g (SIZE : M)



Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
XS	430	75°	495	105	71°	369	45	959.4	561.5	408	69	360.1	503.5
S	474	74.5°	515	120	72°	369	45	966.9	568.9	408	69	370.9	521.1
M	530	73.5°	545	151	73°	369	45	978.5	580.2	408	69	380.7	554.1
L	550	73.5°	565	170	73°	369	45	998.6	600.4	408	69	394.1	557
XL	580	73.2°	585	200	73°	369	45	1018.8	620.5	408	69	407	600.9

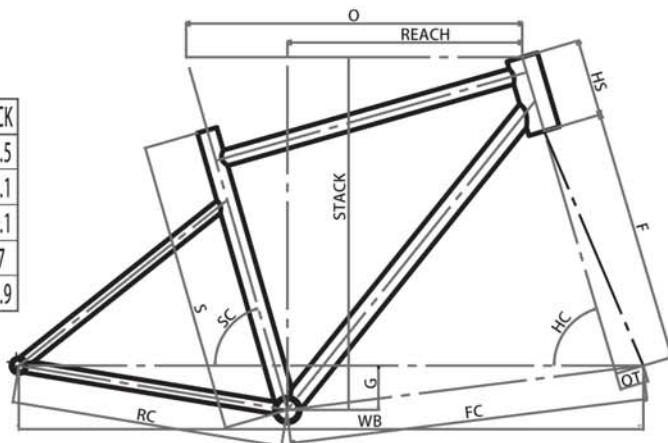

EDGE

AGO R2

SPECIFICATION

FEATURE : CARBON FIBER ROAD FRAME

BRAKE: FLAT MOUNT DISC BRAKE

HEAD SET : 1.5" (FSA NO55R)

FORK CROWN : 36° LOWER PRESSER

MAX TIRE : 700C * 32mm

SEAT POST : 27 . 2mm

BB: BB86 / BSA


SIZE : XS / S / M / L / XL

FRAME WEIGHT:

SL : 880g +/- 30g (SIZE : M)

STD : 1065g +/- 30g (SIZE : M)

EDGE

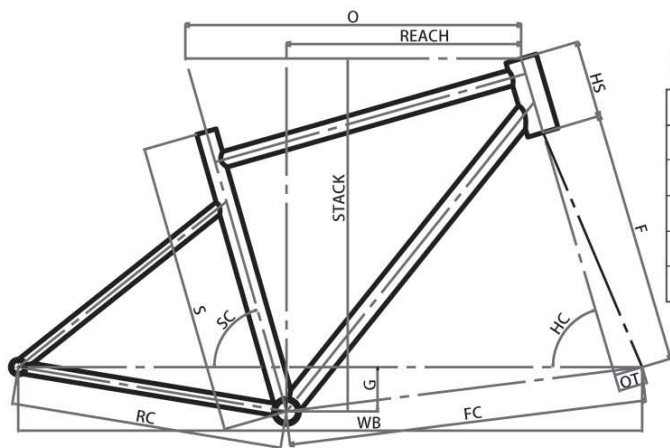

Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
XS	412	74.2°	512	121	71.2°	372	45	975	570	415	69.8	365	522
S	442	73.7°	528	140	71.6°	372	45	983.5	578	415	69.8	370	542
M	472	73.2°	545	161	72°	372	45	990	585	415	69.8	375	562
L	502	70.8°	560	183	72.4°	372	45	1000	595	415	69.8	380	584
XL	532	72.2°	579	202	72.8°	372	45	1007.5	602	415	69.8	386	603.5

ROAD



EDGE

EDU F1

SPECIFICATION

FEATURE : CARBON FIBER ROAD FRAME

BRAKE: FLAT MOUNT DISC BRAKE

HEAD SET : 1.5" (FSA NO55R)

FORK CROWN : 45° LOWER PRESSER

MAX TIRE : 700C * 32mm

SEAT POST : 27 . 2mm


BB: BB86

SIZE : XXS / XS / S / M / L / XL

FRAME WEIGHT:

SL : 870g +/- 30g (SIZE : M)

STD : 1190g +/- 30g (SIZE : M)

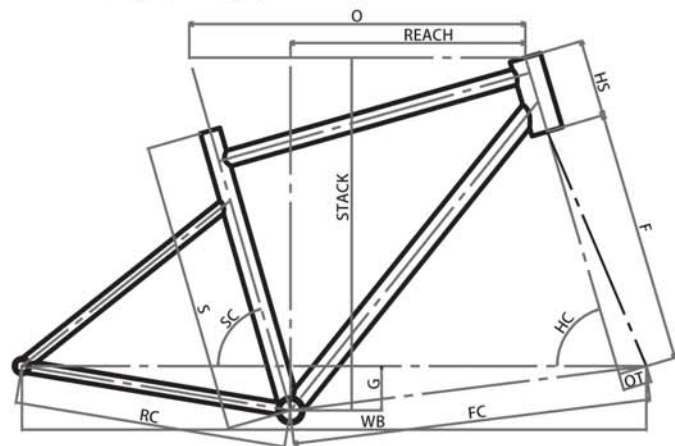

Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
XXS	430	75.3°	500	105	71°	368	45	972.5	568.7	415	73	367.1	506.5
XS	450	74.8°	515	120	71.5°	368	45	983.8	579.9	415	73	373.5	520.7
S	480	74.3°	533	138	72°	368	45	988.8	584.9	415	73	380.9	541.2
M	510	73.9°	545.8	157	72.5°	368	45	998.6	594.6	415	73	381	570.8
L	540	73.5°	567	172.6	72.5°	368	45	1005.7	601.6	415	73	396.4	576
XL	570	73°	582	195	73.5°	368	45	1010.1	606	415	73	396.3	601

ROAD

EDU F2

SPECIFICATION

FEATURE : CARBON FIBER ENTRY ROAD FRAME

BRAKE: FLAT MOUNT DISC BRAKE

HEAD SET : 1.5" (FSA NO55R)

FORK CROWN : STANDARD LOWER PRESSER

MAX TIRE : 700C * 32mm

SEAT POST : 27 . 2mm

BB: BB86

SIZE : XS / S / M / L / XL

FRAME WEIGHT :


SL : 920g +/- 30g (SIZE : M)

STD : 1010g +/- 30g (SIZE : M)



Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
XS	430	74.8°	516	120	70.8°	380	45	986.1	582.8	415	75	370.8	532.8
S	460	74.3°	530	138	71.7°	380	45	987.8	584.5	415	75	374.2	553.1
M	490	73.9°	546	157	72°	380	45	998.6	594.6	415	75	380.8	571.2
L	520	73.5°	560	172.6	73°	380	45	998.4	594.6	415	75	385	589.3
XL	550	73°	580	195	73°	380	45	1012.9	608.8	415	75	392.9	610.6

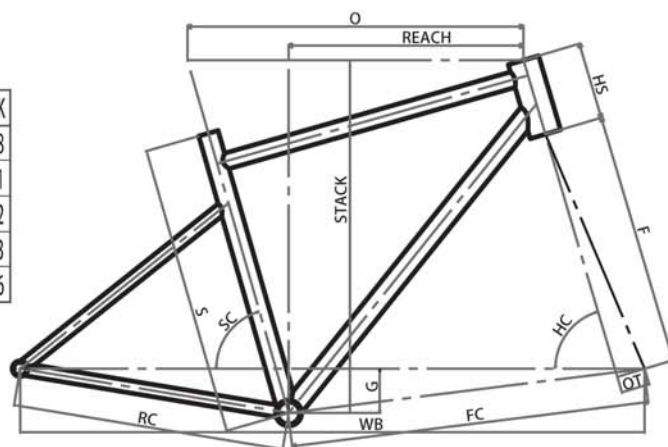

EDGE

PAX 22

SPECIFICATION

FEATURE : CARBON FIBER 29ER BOOST HARDTAIL MTB

FRAME

BRAKE: POST MOUNT DISC BRAKE 160mm

HEAD SET : 1.5" (FSA NO55R)

MAX TIRE : 29ER * 2.3"

SEAT POST : 31 . 6mm

SEAT CLAMP: 34 . 9mm

BB: BB92

MAX CHAIN RING : 36T

HANGER : SRAM UDH

SIZE : XS / S / M / L / XL


FRAME WEIGHT:

SL : 980g +/- 30g (SIZE : M)

STD : 1100g +/- 30g (SIZE : M)



EDGE

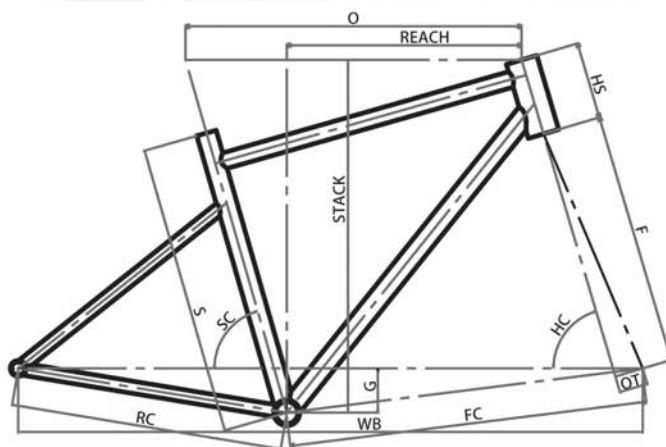

Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
XS(14")	360	74.5°	560	87	68.5°	506	44	1074	655.8	425	60	395	595
S(15.5")	400	74.5°	594.4	92	68.5°	506	44	1106	687.6	425	60	424.9	600
M(17")	430	74.5°	603	97	68.5°	506	44	1118	699.8	425	60	435.2	605
L(18")	460	74.5°	626	110	68.5°	506	44	1142.1	723.9	425	60	455.4	615.2
XL(21")	530	74.5°	648	120	68.5°	506	44	1165	747	425	60	474.6	625

HARDTAIL

PHANTOM 22

SPECIFICATION

FEATURE : CARBON FIBER 29ER BOOST HARDTAIL MTB FRAME

BRAKE: POST MOUNT DISC BRAKE 160mm

HEAD SET : 1.5" (FSA NO55R)

MAX TIRE : 29ER * 2.3"

SEAT POST : 31 . 6mm

SEAT CLAMP: 34 . 9mm


BB: BB92

MAX CHAIN RING : 32T

HANGER : SRAM UDH

SIZE : XS / S / M / L / XL

FRAME WEIGHT : 900g +/- 30g (SIZE : M)

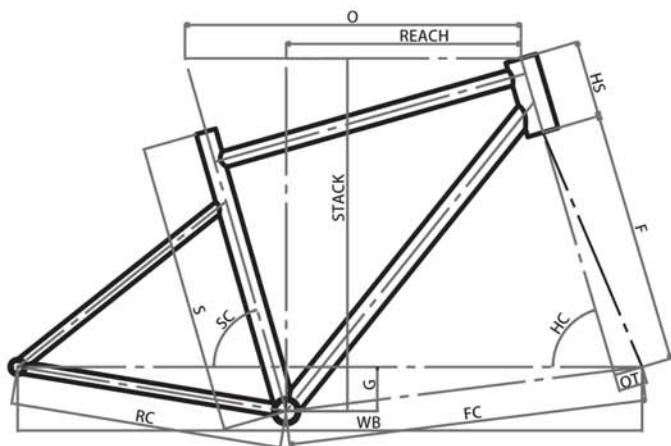

Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
S(15.5")	390	73.6°	575	95	69.5°	490	51	1079.8	656.9	430	60	401.3	591
M(17.5")	440	73.6°	600	100	69.5°	490	51	1104.9	681.8	430	60	424.7	595.7
L(19")	480	73.6°	620	115	69.5°	490	51	1126	702.9	430	60	440.5	609.8
XL(21")	530	73.6°	640	125	69.5°	490	51	1147.4	723.8	430	60	458	619.1



EDGE

RED DEER

SPECIFICATION

FEATURE : CARBON FIBER 29ER BOOST SUSPENSION XC

FRAME

BRAKE: POST MOUNT DISC BRAKE 160mm

HEAD SET : 1.5" (FSA NO55R)

MAX TIRE : 29ER * 2.6"

SEAT POST : 31 . 6mm

SEAT CLAMP: 34 . 9mm

BB: BSA / BB86

MAX CHAIN RING : 36T

HANGER : SRAM UDH

REAR TRAVEL : 100mm

REAR SHOCK : METRIC SIZING + TRUNNION MOUNT


EYE TO EYE : 190*40mm

SIZE : S / M / L / XL

FRAME WEIGHT : 1850g +/- 30g (SIZE : M)



XC

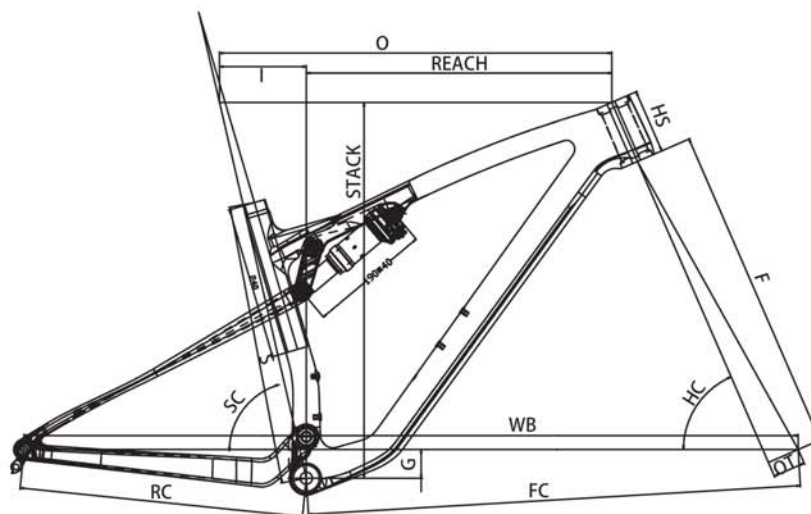

Unit : mm / degree °


SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
S(16")	410	77°	585	96	66.5°	515	51	1183	741.67	445	45	449	585.05
M(17.5")	440	77°	615	101	66.5°	515	51	1214	772.61	445	45	478.9	589.6
L(19")	480	77°	640	106	66.5°	515	51	1239.9	798.5	445	45	502.8	594.22
XL(20.5")	520	77°	665	111	66.5°	515	51	1265.9	824.39	445	45	526.8	598.81

EDGE

FRAME WEIGHT: 1750g +/- 30g (SIZE : M)



XC

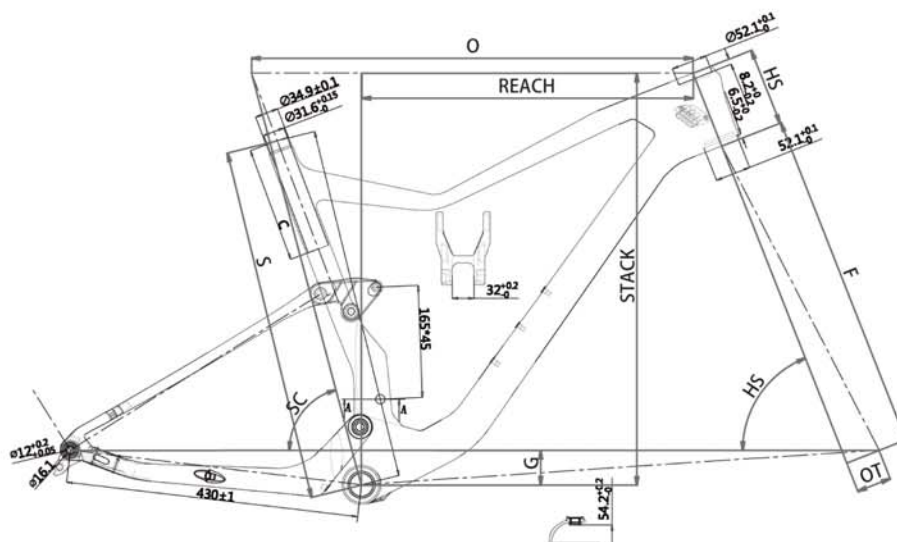

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
S(15.5")	415	74.5"	560	95	68.5"	525	X	X	X	430	30	388	586
M(17.5")	445	74.5"	594	95	68.5"	525	X	X	X	430	30	431	587
L(19")	490	74.9"	618	105	68.5"	525	X	X	X	430	30	457	595
XL(21")	520	75.1"	648	115	68.5"	525	X	X	X	430	30	487	605

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
S(15.5")	415	74.5"	560	95	68.5"	500	X	X	X	430	51	388	586
M(17.5")	445	74.5"	594	95	68.5"	500	X	X	X	430	51	431	587
L(19")	490	74.9"	618	105	68.5"	500	X	X	X	430	51	457	595
XL(21")	520	75.1"	648	115	68.5"	500	X	X	X	430	51	487	605

E PINNACLE PLUS

EDGE

SPECIFICATION

FEATURE : 29"/27.5" CARBON MTB E-BIKE FRAME, FOR SHIMANO EP801 MOTOR

FRAME

BRAKE: POST MOUNT 160 mm

BATTERY : SHIMANO BT_E8036

HEAD SET : 50/56 mm, 1 1/8"-1 1/2"

MAX TIRE : 29ER * 2.35" OR 27.5*3.0"

SEAT POST : 31.6 mm

SEAT CLAMP: 34 . 9mm


BB: SHIMANO DU-EP801

SIZE : S / M / L

FRAME WEIGHT : 2300g +/- 30g (SIZE : M)



E-BIKE

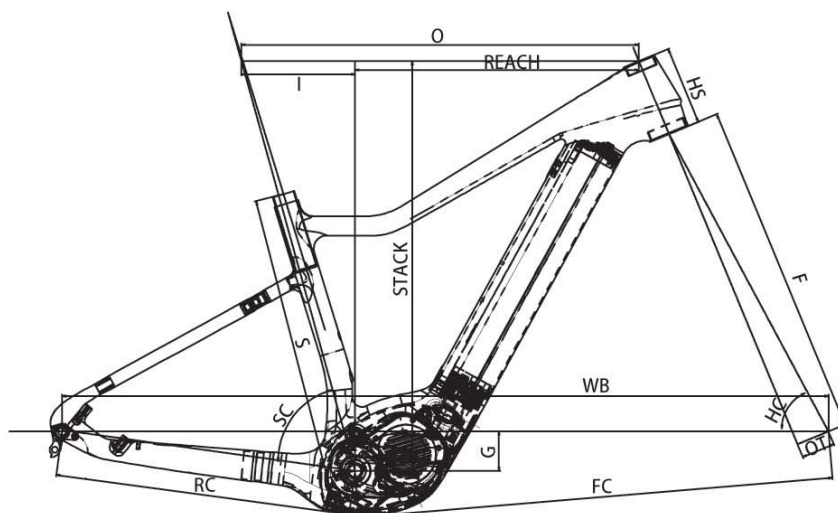

Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
S(16")	400	74.5°	580	110	67.5°	511	51	1140.6	697.2	450	60	409.8	614.2
M(17.5")	435	74.5°	605	120	67.5°	511	51	1166.7	723.2	450	60	432.1	623.4
L(19")	485	74.5°	625	130	67.5°	511	51	1187.9	744.3	450	60	449.5	632.7

EDGE

E PYRENEES PLUS 150

EDGE

SPECIFICATION

FEATURE : 29"/27.5" CARBON MONOCOQUE FULLY MTB E-BIKE FRAME ,
REAR SHOCK EYE TO EYE 185mm,TRAVEL 150mm

FRAME

BRAKE: POST MOUNT 180 mm, DISC

BATTERY :SHIMANO BT_E8036

HEAD SET : 50/56 mm, 1 1/8"-1 1/2"

MAX TIRE : 29ER * 2.35" OR 27.5*3.0"

SEAT POST : 31 . 6mm

SEAT CLAMP: 34 . 9mm


BB: SHIMANO DU-EP801

MAX CHAIN RING : 36T

HANGER : SRAM UDH

SIZE : XS / S / M / L / XL

FRAME WEIGHT : 3700g +/- 30g (SIZE : M)

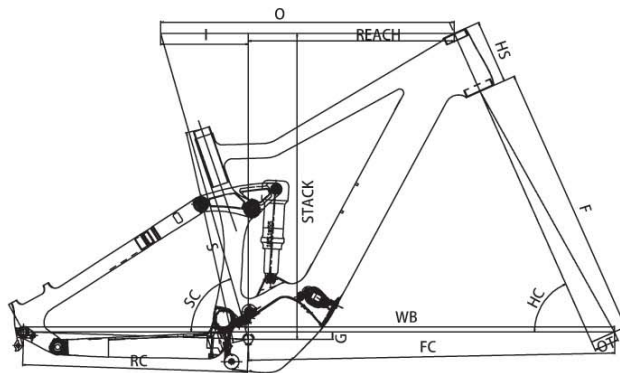

Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
S	400	74°	585	120	66°	561	51	1191.6	732	460	15	408.2	616.4
M	440	74°	601	130	66°	561	51	1209	749.3	460	15	412.5	625.5
L	483	74°	620	140	66°	561	51	1229	769.4	460	15	437.5	634.7
XL	520	74°	640	150	66°	561	51	1251.4	791.8	460	15	455.8	643.8



E-BIKE

E PYRENEES PLUS 160

SPECIFICATION

FEATURE : 29"/27.5" CARBON MONOCOQUE FULLY MTB
E-BIKE FRAME ,REAR SHOCK EYE TO EYE 185mm,
TRAVEL 160mm

BATTERY :DARFON EK.A4C0G.0S2 720WH

MTB FRAME

BRAKE: POST MOUNT 180 mm, DISC

HEAD SET : 50/ 56 mm, 1 1/8"-1 1/2"

MAX TIRE : 29ER * 2.6" OR 27.5*3.0"

SEAT POST : 31 . 6mm

SEAT CLAMP: 34 . 9mm


BB: SHIMANO DU-EP801

MAX CHAIN RING : 32T

HANGER : SRAM UDH

SIZE :S / M / L

FRAME WEIGHT : 3800g +/- 30g (SIZE : M)

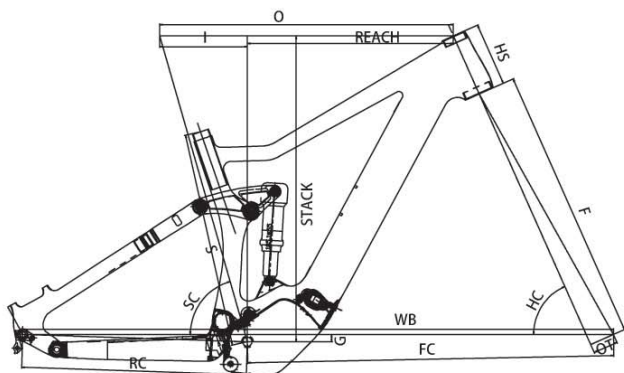

Unit : mm / degree °

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
S	406	75°	590	110	66°	571	51	1102	748	450	15	433.2	614.4
M	457	75°	601	120	66°	571	51	1220	770.7	450	15	442.9	625.5
L	506	75°	630	130	66°	571	51	1240	790.4	450	15	462.5	632.7



EDGE

HB20

SPECIFICATION

FEATURE : CARBON FIBER INTEGRATED ROAD BAR-STEM

CABLE : FULLY INTERNAL ROUTED CABLE

FLARE : 3 °

SIZE : EXTENSION - WIDTH (BAR END EYE TO EYE)

EXT : 85 / 95 / 105 / 115 / 125mm

W : 388 / 408 / 428 / 448mm

COMMONLY USED :

85-388mm / 85-408mm

95-388mm / 95-408mm

105-408mm / 105-428mm

115-428mm / 115-448mm

125-428mm / 125-448mm

WEIGHT : 377g +/- 8g (SIZE: 105-428mm)

COLOR : UD, BLACK

REACH / DROP : 125 / 70mm



INTEGRATED BAR-STEM

HB22

SPECIFICATION

FEATURE : CARBON FIBER INTEGRATED GRAVEL BAR-STEM

CABLE : FULLY INTERNAL ROUTED CABLE

FLARE : 16 °

SIZE : EXTENSION - WIDTH (BAR END EYE TO EYE)

EXT : 85 / 95 / 105 / 115 / 125mm

W : 440 / 460 / 480 / 500mm

COMMONLY USED :

85-440mm / 85-460mm / 85-480mm

95-440mm / 95-460mm / 95-480mm

105-440mm / 105-460mm / 105-480 / 105-500mm

115-480mm / 115-500mm

125-480mm / 125-500mm

WEIGHT : 377g +/- 8g (SIZE: 105-428mm)

COLOR : UD, BLACK

REACH / DROP : 125 / 70mm



HB18

SPECIFICATION

FEATURE : CARBON FIBER INTEGRATED ROAD BAR-STEM

CABLE : FULLY INTERNAL ROUTED CABLE

FLARE : 3 °

SIZE : EXTENSION - WIDTH

EXT : 90 / 100 / 110 / 120mm

W : 380 / 400 / 420 / 440mm

380mm only for 90mm

COMMONLY USED :

90-380mm / 90-400mm

100-400mm / 100-420mm

110-420mm / 110-440mm

120-420mm / 120-440mm

WEIGHT : 377g +/- 8g (SIZE: 100-420mm)

COLOR : UD, BLACK

REACH / DROP : 132 / 82.5mm



INTEGRATED BAR-STEM

HB28

SPECIFICATION

FEATURE : CARBON FIBER INTEGRATED GRAVEL BAR-STEM

CABLE : FULLY INTERNAL ROUTED CABLE

FLARE : 12 °

SIZE : EXTENSION - WIDTH (BAR END EYE TO EYE)

EXT : 90 / 100 / 110 / 120 / 130mm

W : 442 / 462 / 482 / 502mm

442mm only for 90mm

COMMONLY USED :

90-442mm / 90-462mm

100-462mm / 100-482mm

110-482mm / 110-502mm

120-482mm / 120-502mm

130-502mm

WEIGHT : 377g +/- 8g (SIZE: 100-482mm)

COLOR : UD, BLACK



HB-CSL-PISTA

SPECIFICATION

FEATURE : CARBON FIBER TRACK BAR

SIZE : WIDTH (BAR END EYE TO EYE)

W : 370 / 380mm

BAR BORE : 31.8mm

WEIGHT : 330g (SIZE: 370mm)

COLOR : UD, BLACK

REACH / DROP : 148 / 82mm



TRACK BAR

HB-CSL-THRUSTER

SPECIFICATION

FEATURE : CARBON FIBER TRACK BAR

SIZE : WIDTH (BAR END EYE TO EYE)

W : 310 / 330 / 350 / 370 / 390mm

BAR BORE : 31.8mm

WEIGHT : 330g (SIZE: 370mm)

COLOR : UD, BLACK

REACH / DROP : 104 / 120mm



HB-CSL-AERO

SPECIFICATION

FEATURE : CARBON FIBER AERO ROAD BAR

SIZE : WIDTH

W : 400/ 420 / 440mm

BAR BORE : 31.8mm

WEIGHT : 230g (SIZE: 420mm)

COLOR : UD, BLACK

REACH / DROP : 76 / 127 mm



AERO BAR

HB-CSL-AERO 2

SPECIFICATION

FEATURE : CARBON FIBER AERO ROAD BAR

SIZE : WIDTH

W : 400/ 420 / 440mm

BAR BORE : 31.8mm

WEIGHT : 230g (SIZE: 420mm)

COLOR : UD, BLACK

REACH / DROP : 80 / 130 mm



HB-CSL-6

SPECIFICATION

FEATURE : CARBON FIBER AERO ROAD BAR

SIZE : WIDTH

W : 400 / 420 / 440mm

BAR BORE : 31.8mm

WEIGHT : 230g (SIZE: 420mm)

COLOR : UD, BLACK

REACH / DROP : 79 / 129 mm



ROAD BAR

SEAT POST

SP-CSL-3

SPECIFICATION

FEATURE : CARBON FIBER SEAT POST

OD : 27.2 / 31.6 mm

SADDLE CLAMP : 7*7mm

WEIGHT : 198g / 208g

COLOR : UD, BLACK



SP-CSL-4

SPECIFICATION

FEATURE : CARBON FIBER SEAT POST

OD : 25.4 / 27.2 / 30.9 / 31.6 mm

SADDLE CLAMP : 7*7 / 7*9 mm

OFFSET : 25mm

WEIGHT : 204g / 224g (27.2 / 31.6 mm)

COLOR : UD, BLACK



EDGE MESSENGER 30

SPECIFICATION

FEATURE : ALLOY ROAD WHEEL SET

BRAKE : RIM BRAKE

RIM SIZE : H : 30mm / W : 24mm / INNER : 19mm

RIM TYPE: CLINCHER, TUBELESS READY

E . R . D : 570.5 mm

SPOKE : 20 / 24

MATERIAL : STAINLESS

SHAPE : ROUND D. B .

NIPPLE : BRASS

GAUGE : 14G

LACING :

FRONT : RADIAL

REAR :

RADIAL (non-drive side) / CROSS (drive side)

HUB : J-BEND

MATERIAL : ALLOY

FREE HUB SWITCHABLE : YES

FREE HUB : SHIMANO / SRAM / CAMPY

O.L.D : F100mm / R130mm

AXLE TYPE : QR AXLE 5mm

WEIGHT: 1541g +/- 30g

COLOR : AD BLACK



ALLOY WHEEL

EDGE MESSENGER 30 D

SPECIFICATION

FEATURE : ALLOY ROAD WHEEL SET

BRAKE : DISC BRAKE (CENTERLOCK)

RIM SIZE : H : 30mm / W : 24mm / INNER : 19mm

RIM TYPE: CLINCHER, TUBELESS READY

E . R . D : 570.5 mm

SPOKE : 24 / 24

MATERIAL : STAINLESS

SHAPE : ROUND D. B .

NIPPLE : BRASS

GAUGE : 14G

LACING :

FRONT : CROSS

REAR : CROSS

HUB : J-BEND

MATERIAL : ALLOY

FREE HUB SWITCHABLE : YES

FREE HUB : SHIMANO / SRAM / CAMPY

O.L.D : F100mm / R142mm

AXLE TYPE : THRU AXLE 12mm

WEIGHT: 1714g +/- 30g

COLOR : AD BLACK



EDGE

EDGE

BK1983D / WB08

SPECIFICATION

FEATURE : DOUBLE WHEEL SET

SIZE : 29" * 2.6" WHEEL SET

MATERIAL : 1200D

COLOR : BLACK



WHEEL BAG

BK1990D-L

SPECIFICATION

FEATURE : DOUBLE WHEEL SET

SIZE : 29" * 2.3" / 700C * 58mm

MATERIAL : 1200D

COLOR : BLACK



EDGE